

# INTRODUCTION TO THE DATA TABLE

1. Introduction to the Data Table

2. Data Table Structure

3. Data Table Operations

4. Data Table Examples

5. Data Table Applications

6. Data Table Conclusion

7. Data Table Summary

8. Data Table Appendix

9. Data Table Bibliography

10. Data Table Index

11. Data Table Glossary

12. Data Table Acknowledgments

13. Data Table References

14. Data Table Notes

15. Data Table Figures

16. Data Table Tables

17. Data Table Equations

18. Data Table Diagrams

19. Data Table Lists

20. Data Table References

21. Data Table Notes

22. Data Table Figures

23. Data Table Tables

24. Data Table Equations

25. Data Table Diagrams

26. Data Table Lists


27. Data Table References

28. Data Table Notes

29. Data Table Figures

30. Data Table Tables

| Tyre type | Tyre size | Part no. | Chimed | Ply rating | TT or TL | Aspect ratio | Speed rating | Max. load lbs | Inf. pressure unloaded psi | Inf. Pressure loaded psi | Typical weight lbs | Inflated dimensions |       |      |        |        | Loaded radius |      | Rim dimensions |                       |                |               | Test specification | CAA / EASA Approval | FAA Approval      | MDO Approval                    | NSN Approval |                  |
|-----------|-----------|----------|--------|------------|----------|--------------|--------------|---------------|----------------------------|--------------------------|--------------------|---------------------|-------|------|--------|--------|---------------|------|----------------|-----------------------|----------------|---------------|--------------------|---------------------|-------------------|---------------------------------|--------------|------------------|
|           |           |          |        |            |          |              |              |               |                            |                          |                    | W MIN               | W MAX | WS   | Do MIN | Do MAX |               |      | Ds             | Width between flanges | Ledge diameter | Flange height |                    |                     |                   |                                 |              | Min. ledge width |
|           |           |          |        |            |          |              |              |               |                            |                          |                    |                     |       |      |        |        |               |      |                |                       |                |               |                    |                     |                   |                                 |              |                  |
| III       | 6.00-6    | DR7731   | No     | 4          | TT       | 0.91         | 120          | 1150          | 29                         | 30                       | 7.1                | 5.9                 | 6.3   | 5.35 | 16.8   | 17.5   | 15.45         | 6.9  |                | 5                     | 6              | 0.75          | 0.8                | TSO-C62c            | E13853 01/12/1991 | WEG/VK/03/29/0961-91 29/03/1991 |              | Y 2620-99-610030 |
| III       | 6.00-6    | DR7732T  | No     | 10         | TL       | 0.91         | 160          | 4875          | 113                        | 118                      | 8                  | 5.9                 | 6.55  | 5.55 | 16.8   | 17.95  | 15.85         | 7    |                | 5                     | 6              | 0.85          | 0.9                | TS-C62C 32/2002     |                   |                                 | Y            | 2620-99-6115745  |
| III       | 6.50-10   | DR12330T | No     | 10         | TL       | 0.91         | 190          | 4750          | 100                        | 104                      | 14.2               | 6.25                | 6.65  | 5.65 | 21.35  | 22.1   | 19.9          | 9.1  |                | 4.75                  | 10             | 0.81          | 1.2                | TSO-C62c DSC 429A   | E14211 18/06/1989 | HH/VK/07/06/2381-89 06/07/1989  |              |                  |
| III       | 6.50-8    | DR17421T | No     | 8          | TL       | 0.88         | 160          | 3150          | 75                         | 78                       | 11.6               | 6.35                | 6.9   | 5.85 | 19.15  | 19.85  | 17.7          | 8    |                | 5.25                  | 8              | 0.81          | 0.95               | TSO-C62d            | E15749 27/11/1998 | GE/VK/12/14/98/C62d 14/12/1998  |              |                  |
| III       | 7.00-7.5  | DD14020  | No     | 6          | TT       | 0.9          |              | 2250          | 45                         | 48                       | 9.75               | 6.68                | 7.02  |      | 19.66  | 20.34  |               | 8.05 |                | 4.75                  | 7.59           | 0.68          | 0.56               |                     |                   |                                 |              |                  |
| III       | 7.00-6    | DR7922   | No     | 8          | TT       | 0.91         | 120          | 2550          | 54                         | 56                       | 8.6                | 6.6                 | 7     | 6.45 | 18     | 18.75  | 16.45         | 7.3  |                | 5                     | 6              | 0.75          | 0.9                |                     |                   |                                 |              |                  |
| III       | 7.00-6    | DR7922T  | No     | 8          | TL       | 0.91         | 120          | 2550          | 54                         | 56                       | 9.6                | 6.6                 | 7.25  | 6.45 | 18     | 18.75  | 16.45         | 7.3  |                | 5                     | 6              | 0.75          | 0.9                |                     |                   |                                 | Y            | 2620-99-2651082  |
| III       | 7.00-6    | DR7925T  | No     | 10         | TL       | 0.91         | 120          | 5400          | 110                        | 114                      | 10.9               | 6.6                 | 7.25  | 6.18 | 18     | 19.25  | 16.85         | 7.3  |                | 5                     | 6              | 0.75          | 0.9                | TSO-C62c            | E13510 21/01/1986 | VK/8/13/9388-86 13/08/1986      |              |                  |
| III       | 7.25-7.75 | DR6620   | No     | 6          | TT       | 0.91         | 160          | 2450          | 50                         | 52                       | 13                 | 6.7                 | 7     |      | 19.95  | 20.65  |               | 8.5  |                | 4.75                  | 7.77           | 0.65          | 0.62               |                     |                   |                                 |              |                  |
| III       | 7.50-10   | DR12220  | No     | 8          | TT       | 0.9          | 160          | 3880          | 63                         | 66                       | 13.5               | 7.2                 | 7.65  | 6.5  | 23.3   | 24.15  | 21.6          | 9.7  |                | 5.5                   | 10             | 0.81          | 1                  |                     |                   |                                 |              |                  |
| III       | 7.50-10   | DR12220T | No     | 8          | TL       | 0.9          | 160          | 3880          | 63                         | 66                       | 16.8               | 7.2                 | 7.65  | 6.5  | 23.3   | 24.15  | 21.6          | 9.7  |                | 5.5                   | 10             | 0.81          | 1                  |                     | E9700 10/12/1969  |                                 | Y            | 2620-99-4702067  |

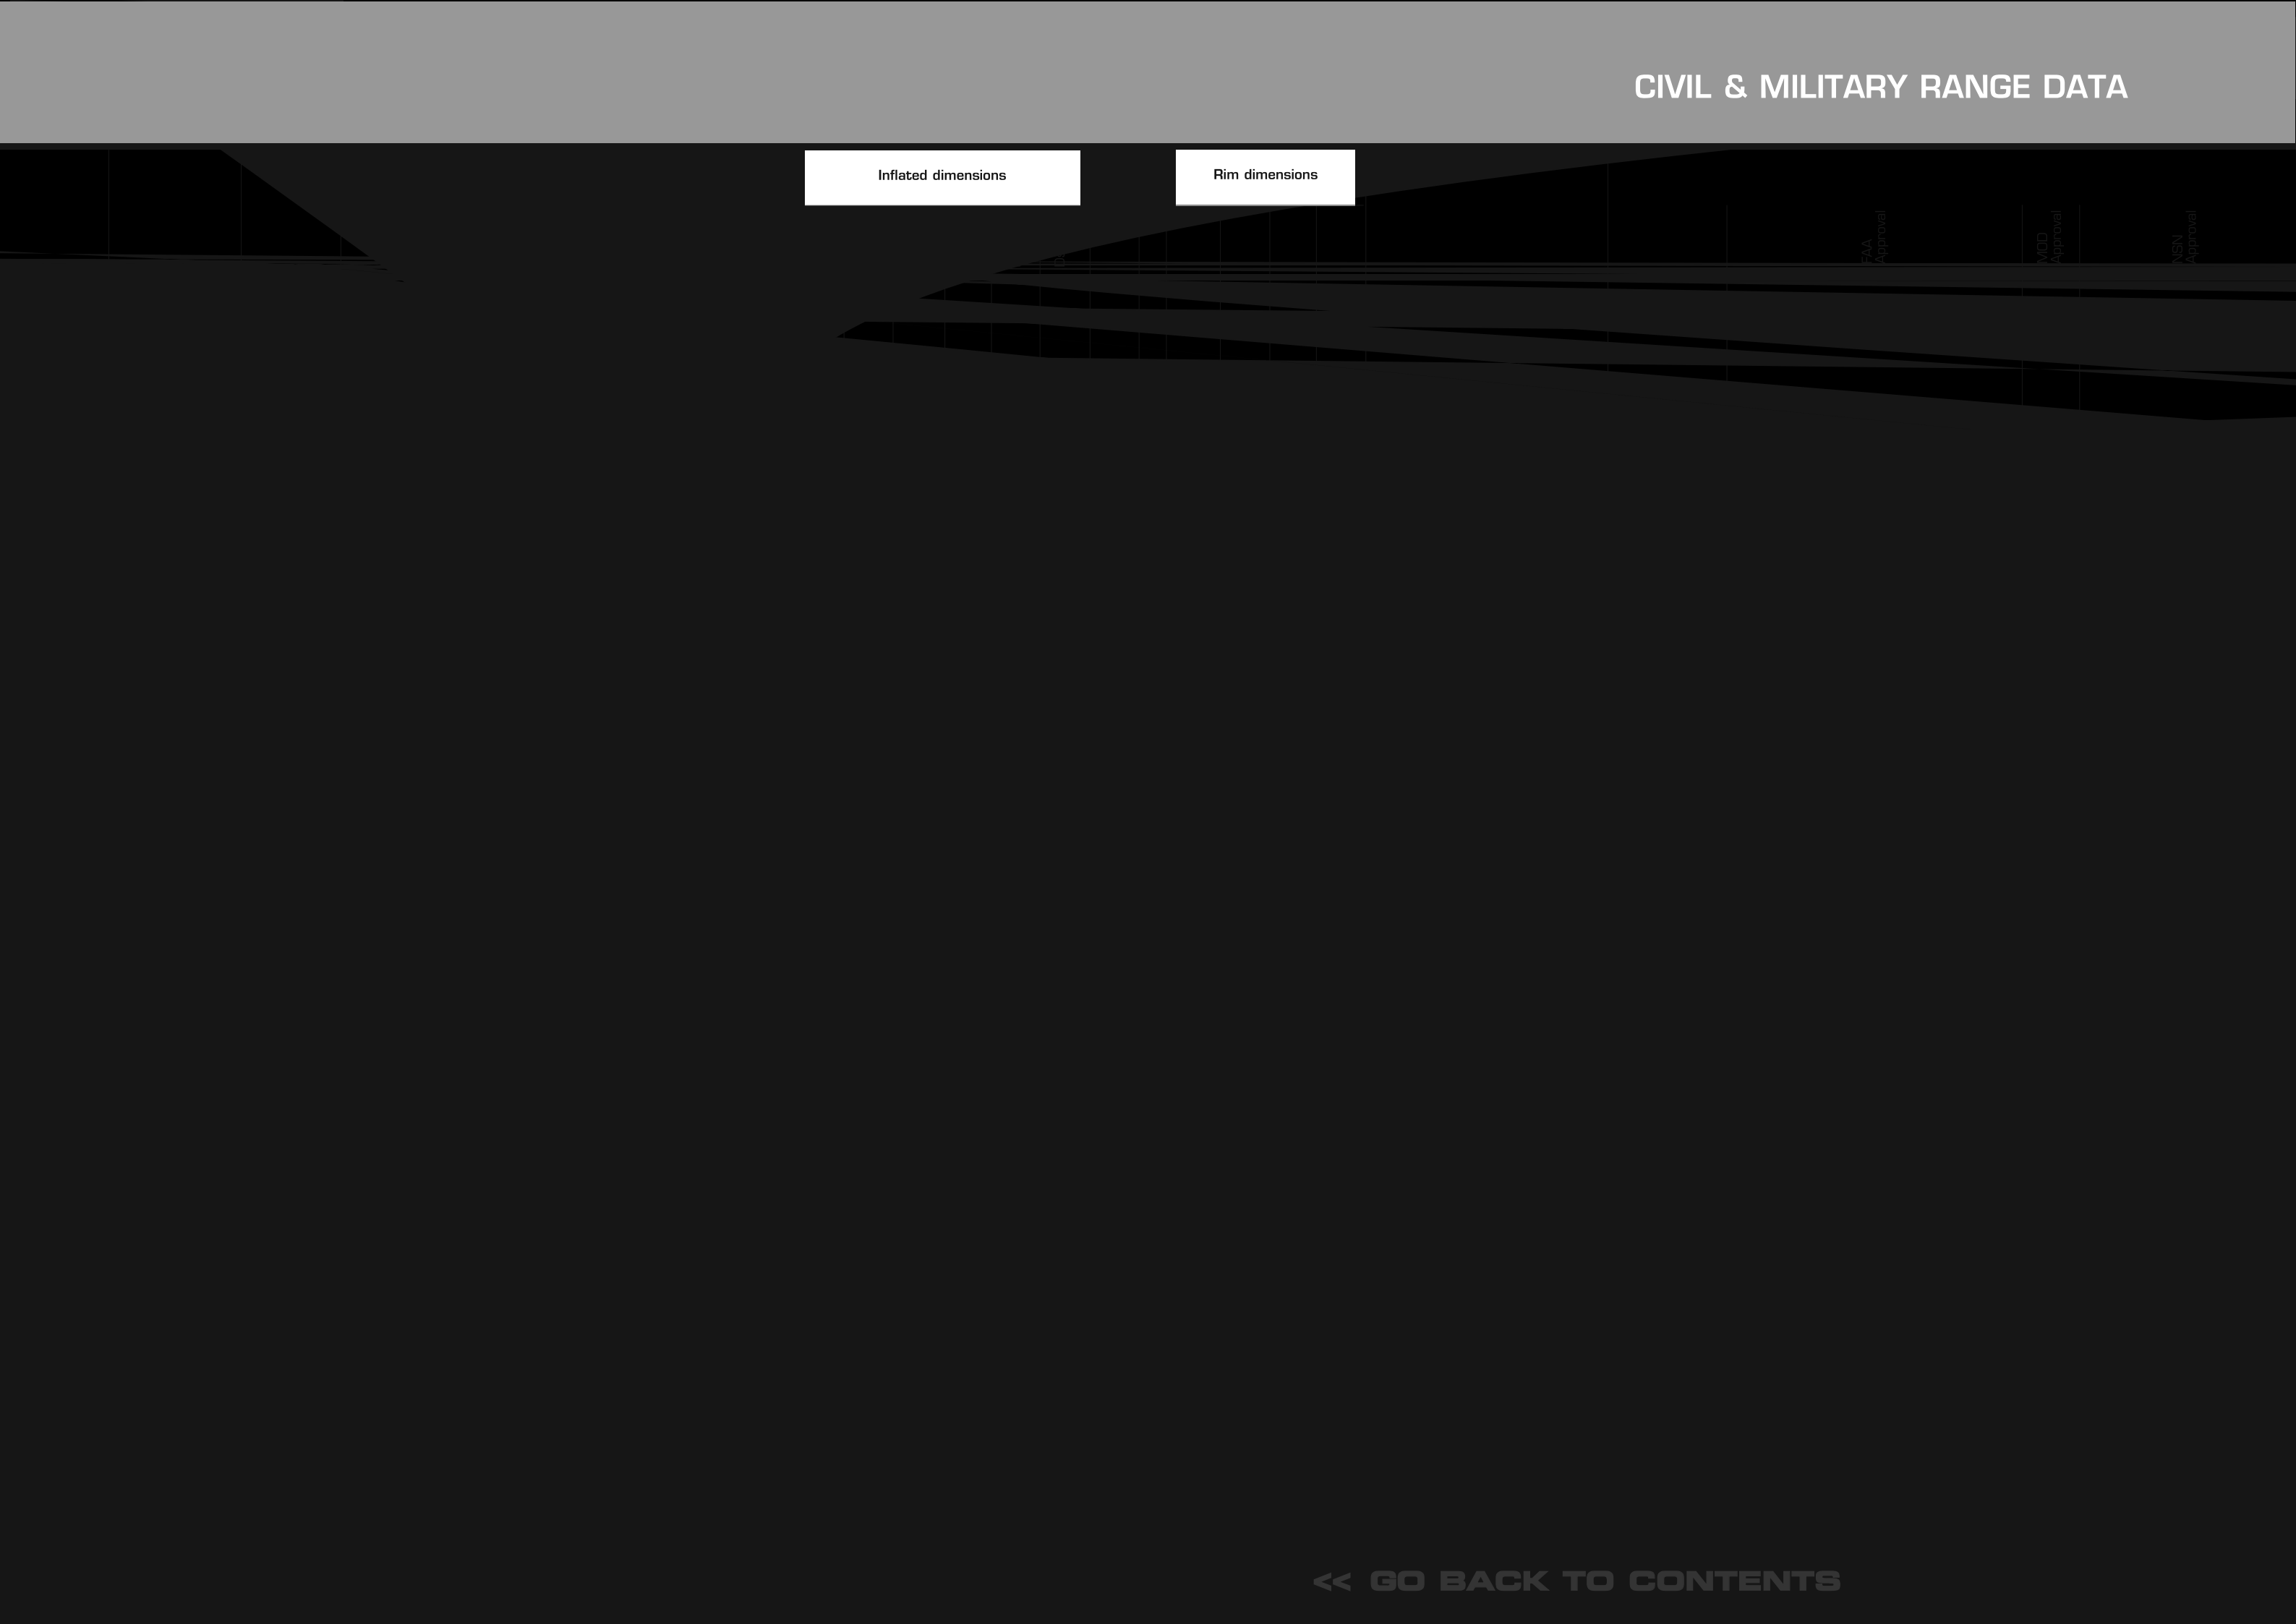

CIVIL & MILITARY RANGE DATA

Inflated dimensions

Rim dimensions

FAA  
Approval

MDO  
Approval

NSN  
Approval

## CIVIL & MILITARY RANGE DATA

### Inflated dimensions

### Rim dimensions