

Clean Master™ Pressure Wash 3000

Formerly - PowerClean™ 1 or 2 Wire Braid



Pressure Wash 3000

Color	Hose I.D.		Hose O.D.		Max. W.P.	Vac.	MBR	Wt. Per ft	Length	Std. Pack	Pkg Code	Gates Item No.	
	(in)	(mm)	(in)	(mm)									(psi)
Black	3/8	9.5	.67	17.0	3000	210	30.0	2.5	.23	300	REEL	S	4657-2402
Black	3/8	9.5	.67	17.0	3000	210	30.0	2.5	.23	1000	REEL	S	4657-2401
Black	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	300	REEL	S	4657-9375
Black	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.24	1000	REEL	S	4657-9376
Black	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.24	2800	BALE	S	4657-9530
Blue	3/8	9.5	.67	17.0	3000	210	30.0	2.5	.23	300	REEL	S	4657-2404
Blue	3/8	9.5	.67	17.0	3000	210	30.0	2.5	.23	1000	REEL	S	4657-2403
Blue	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	300	REEL	S	4657-9456
Blue	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	1000	REEL	S	4657-9455
Blue	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	2800	BALE	S	4657-9531
Gray	3/8	9.5	.67	17.0	3000	210	30.0	2.5	.23	300	REEL	S	4657-2416
Gray	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	300	REEL	S	4657-9458
Gray	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	1000	REEL	S	4657-9457
Gray	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	2800	BALE	S	4657-9532
Yellow	3/8	9.5	.67	17.0	3000	210	30.0	2.5	.23	300	REEL	S	4657-2417
Yellow	3/8	9.5	.67	17.0	3000	210	30.0	2.5	.24	1000	REEL	S	4657-2418
Yellow	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	300	REEL	S	4657-9459
Yellow	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	1000	REEL	S	4657-9454
Yellow	1/2	12.7	.79	20.0	3000	210	30.0	3.5	.25	2800	BALE	S	4657-9533

Pressure Wash 3000 - Cut Lengths

Color	Hose I.D.		Hose O.D.		Max. W.P.	Vac.	MBR	Wt. Per ea	Length	Std. Pack	Pkg Code	Gates Item No.	
	(in)	(mm)	(in)	(mm)									(psi)
Black	3/8	9.5	.67	17.0	3000	210	30.0	2.5	11.83	50	CTN	T	4657-2469
Blue	3/8	10.0	.67	17.0	3000	210	30.0	2.5	12.20	50	CTN	T	4657-2470
Yellow	3/8	9.5	.67	17.0	3000	210	30.0	2.5	12.22	50	CTN	T	4657-0064

RECOMMENDED FOR: Hot and cold water high-pressure cleaning equipment used in commercial and industrial cleaning applications where heavy-duty service is required. Specially compounded cover to handle harsh environments.


CAUTION: Not recommended for steam service. Use bend restrictors to extend service life.

TEMPERATURE: -40°F to +250°F (-40°C to +121°C). Meets 300°F (150°C) intermittent per EN1829-2. Increased operating temperatures will reduce hose assembly service life.

CONSTRUCTION:
Tube: Type C (Nitrile), Black.
Reinforcement: Braided, steel wire.
Cover: Type C2 (Modified Nitrile), Non-marking except for black. Abrasion-resistant, Ozone-resistant, MSHA-flame resistant.

COUPLINGS: 74 Gates MegaCrimp™ and 90 Pro™ Series couplings. Reference the Hose Couplings

AGRICULTURE
AIR BREATHING
AIR DUCT
AIR AND MULTI-PURPOSE
CHEMICAL
FOOD AND BEVERAGE
ENGINE AND MARINE
MATERIAL HANDLING
MINING
OILFIELD
PETROLEUM
PRESSURE WASH AND WASHDOWN
STEAM
WATER
CLAMPS
COUPLINGS AND FERRULES
HOSE FINDER
CHEMICAL RESISTANCE TABLE





Clean Master™ Pressure Wash Assemblies



AGRICULTURE

AIR BREATHING

AIR DUCT

AIR AND MULTI-PURPOSE

CHEMICAL

FOOD AND BEVERAGE

ENGINE AND MARINE

MATERIAL HANDLING

MINING

OILFIELD

PETROLEUM

PRESSURE WASH AND WASHDOWN

STEAM

WATER

CLAMPS

COUPLINGS AND FERRULES

HOSE FINDER

CHEMICAL RESISTANCE TABLE

Pressure Wash 4000

Color	Hose I.D.		Hose O.D.		Max. W.P.		Vac.	MBR	Wt. Per ea	Length	Std. Pack	Pkg Code	Gates Item No.
	(in)	(mm)	(in)	(mm)	(psi)	(Bar)							
Black	3/8	9.5	.67	17.0	4000	280	30.0	2.5	11.00	50	ASSY	T	3604-0922
Black	3/8	9.5	.67	17.0	4000	280	30.0	2.5	20.00	100	ASSY	T	3604-0923
Blue	3/8	9.5	.67	17.0	4000	280	30.0	2.5	11.00	50	ASSY	T	3604-0926
Blue	3/8	9.5	.67	17.0	4000	280	30.0	2.5	20.00	100	ASSY	T	3604-0920
Gray	3/8	9.5	.67	17.0	4000	280	30.0	2.5	11.00	50	ASSY	T	3604-0924
Gray	3/8	9.5	.67	17.0	4000	280	30.0	2.5	20.00	100	ASSY	T	3604-0925
Yellow	3/8	9.5	.67	17.0	4000	280	30.0	2.5	11.00	50	ASSY	T	3604-0927
Yellow	3/8	9.5	.67	17.0	4000	280	30.0	2.5	20.00	100	ASSY	T	3604-0928

Pressure Wash 6000

Color	Hose I.D.		Hose O.D.		Max. W.P.		Vac.	MBR	Wt. Per ea	Length	Std. Pack	Pkg Code	Gates Item No.
	(in)	(mm)	(in)	(mm)	(psi)	(Bar)							
Black	3/8	9.5	.74	18.8	6000	420	30.0	2.5	18.00	50	ASSY	T	3604-0929
Black	3/8	9.5	.74	18.8	6000	420	30.0	2.5	34.00	100	ASSY	T	3604-0930
Blue	3/8	9.5	.74	18.8	6000	420	30.0	2.5	18.00	50	ASSY	T	3604-0932
Blue	3/8	9.5	.74	18.8	6000	420	30.0	2.5	34.00	100	ASSY	T	3604-0933
Gray	3/8	9.5	.74	18.8	6000	420	30.0	2.5	18.00	50	ASSY	T	3604-0931
Gray	3/8	9.5	.74	18.8	6000	420	30.0	2.5	34.00	100	ASSY	T	3604-0921
Yellow	3/8	9.5	.74	18.8	6000	420	30.0	2.5	18.00	50	ASSY	T	3604-0934
Yellow	3/8	9.5	.74	18.8	6000	420	30.0	2.5	34.00	100	ASSY	T	3604-0935

RECOMMENDED FOR: Hot and cold water high-pressure cleaning equipment used in commercial and industrial cleaning, food processing, sanitation, and car wash applications where heavy-duty service is required. Specially compounded cover to handle harsh environments.

CAUTION: Not recommended for steam service.

TEMPERATURE: -40°F to +250°F (-40°C to +121°C). Meets 300°F (150°C) intermittent per EN1829-2. Increased operating temperatures will reduce hose assembly service life.

CONSTRUCTION: **Tube:** Type C (Nitrile), Black.
Reinforcement: Braided, steel wire.
Cover: Type C2 (Modified Nitrile), Non-marking except for black. Abrasion-resistant, Ozone-resistant, MSHA-flame resistant.

COUPLINGS: Gates permanent couplings (3/8" Male NPT x 3/8" Male NPT swivel with bend restrictors applied on each end).

STANDARDS: Meets MSHA Flame-resistant, Exceeds EN1829-2.


Clean Master™ Washdown 1000
Formerly - Cyclone™



Color	Hose I.D.		Hose O.D.		Max. W.P.	Vac.	MBR	Wt. Per ft	Length	Std. Pack	Pkg Code	Gates Item No.	
	(in)	(mm)	(in)	(mm)									(psi)
Blue	3/8	9.5	1.73	18.5	1000	68.9	30.0	4.0	.19	500-750	REEL	UU	3217-0654
Blue	1/2	12.7	1.94	23.9	1000	68.9	30.0	5.0	.31	500-750	REEL	UU	3217-0659
Blue	3/4	19.1	1.20	30.5	1000	68.9	30.0	6.0	.38	500-750	REEL	UU	3217-5017
Red	3/4	19.1	1.20	30.5	1000	68.9	30.0	6.0	.45	100	BULK	T	3217-5016
Red	3/4	19.1	1.20	30.5	1000	68.9	30.0	6.0	.44	500-750	REEL	UU	3217-0658
Yellow	3/8	9.5	1.73	18.5	1000	68.9	30.0	4.0	.18	100	BULK	T	3217-0584
Yellow	3/8	9.5	1.73	18.5	1000	68.9	30.0	4.0	.18	625	REEL	BB	3217-0585
Yellow	1/2	12.7	1.94	23.9	1000	68.9	30.0	5.0	.29	100	BULK	T	3217-0587
Yellow	1/2	12.7	1.94	23.9	1000	68.9	30.0	5.0	.29	625	REEL	BB	3217-0586
Yellow	3/4	19.1	1.20	30.5	1000	68.9	30.0	6.0	.41	625	REEL	BB	3217-0588

RECOMMENDED FOR: High-pressure washer operations using mild detergents; ideal for meat, poultry and other food processing plants. Cover is resistant to weather, oil, animal fat, abrasion and heat encountered in food plant cleaning applications.

CAUTION: Air service working

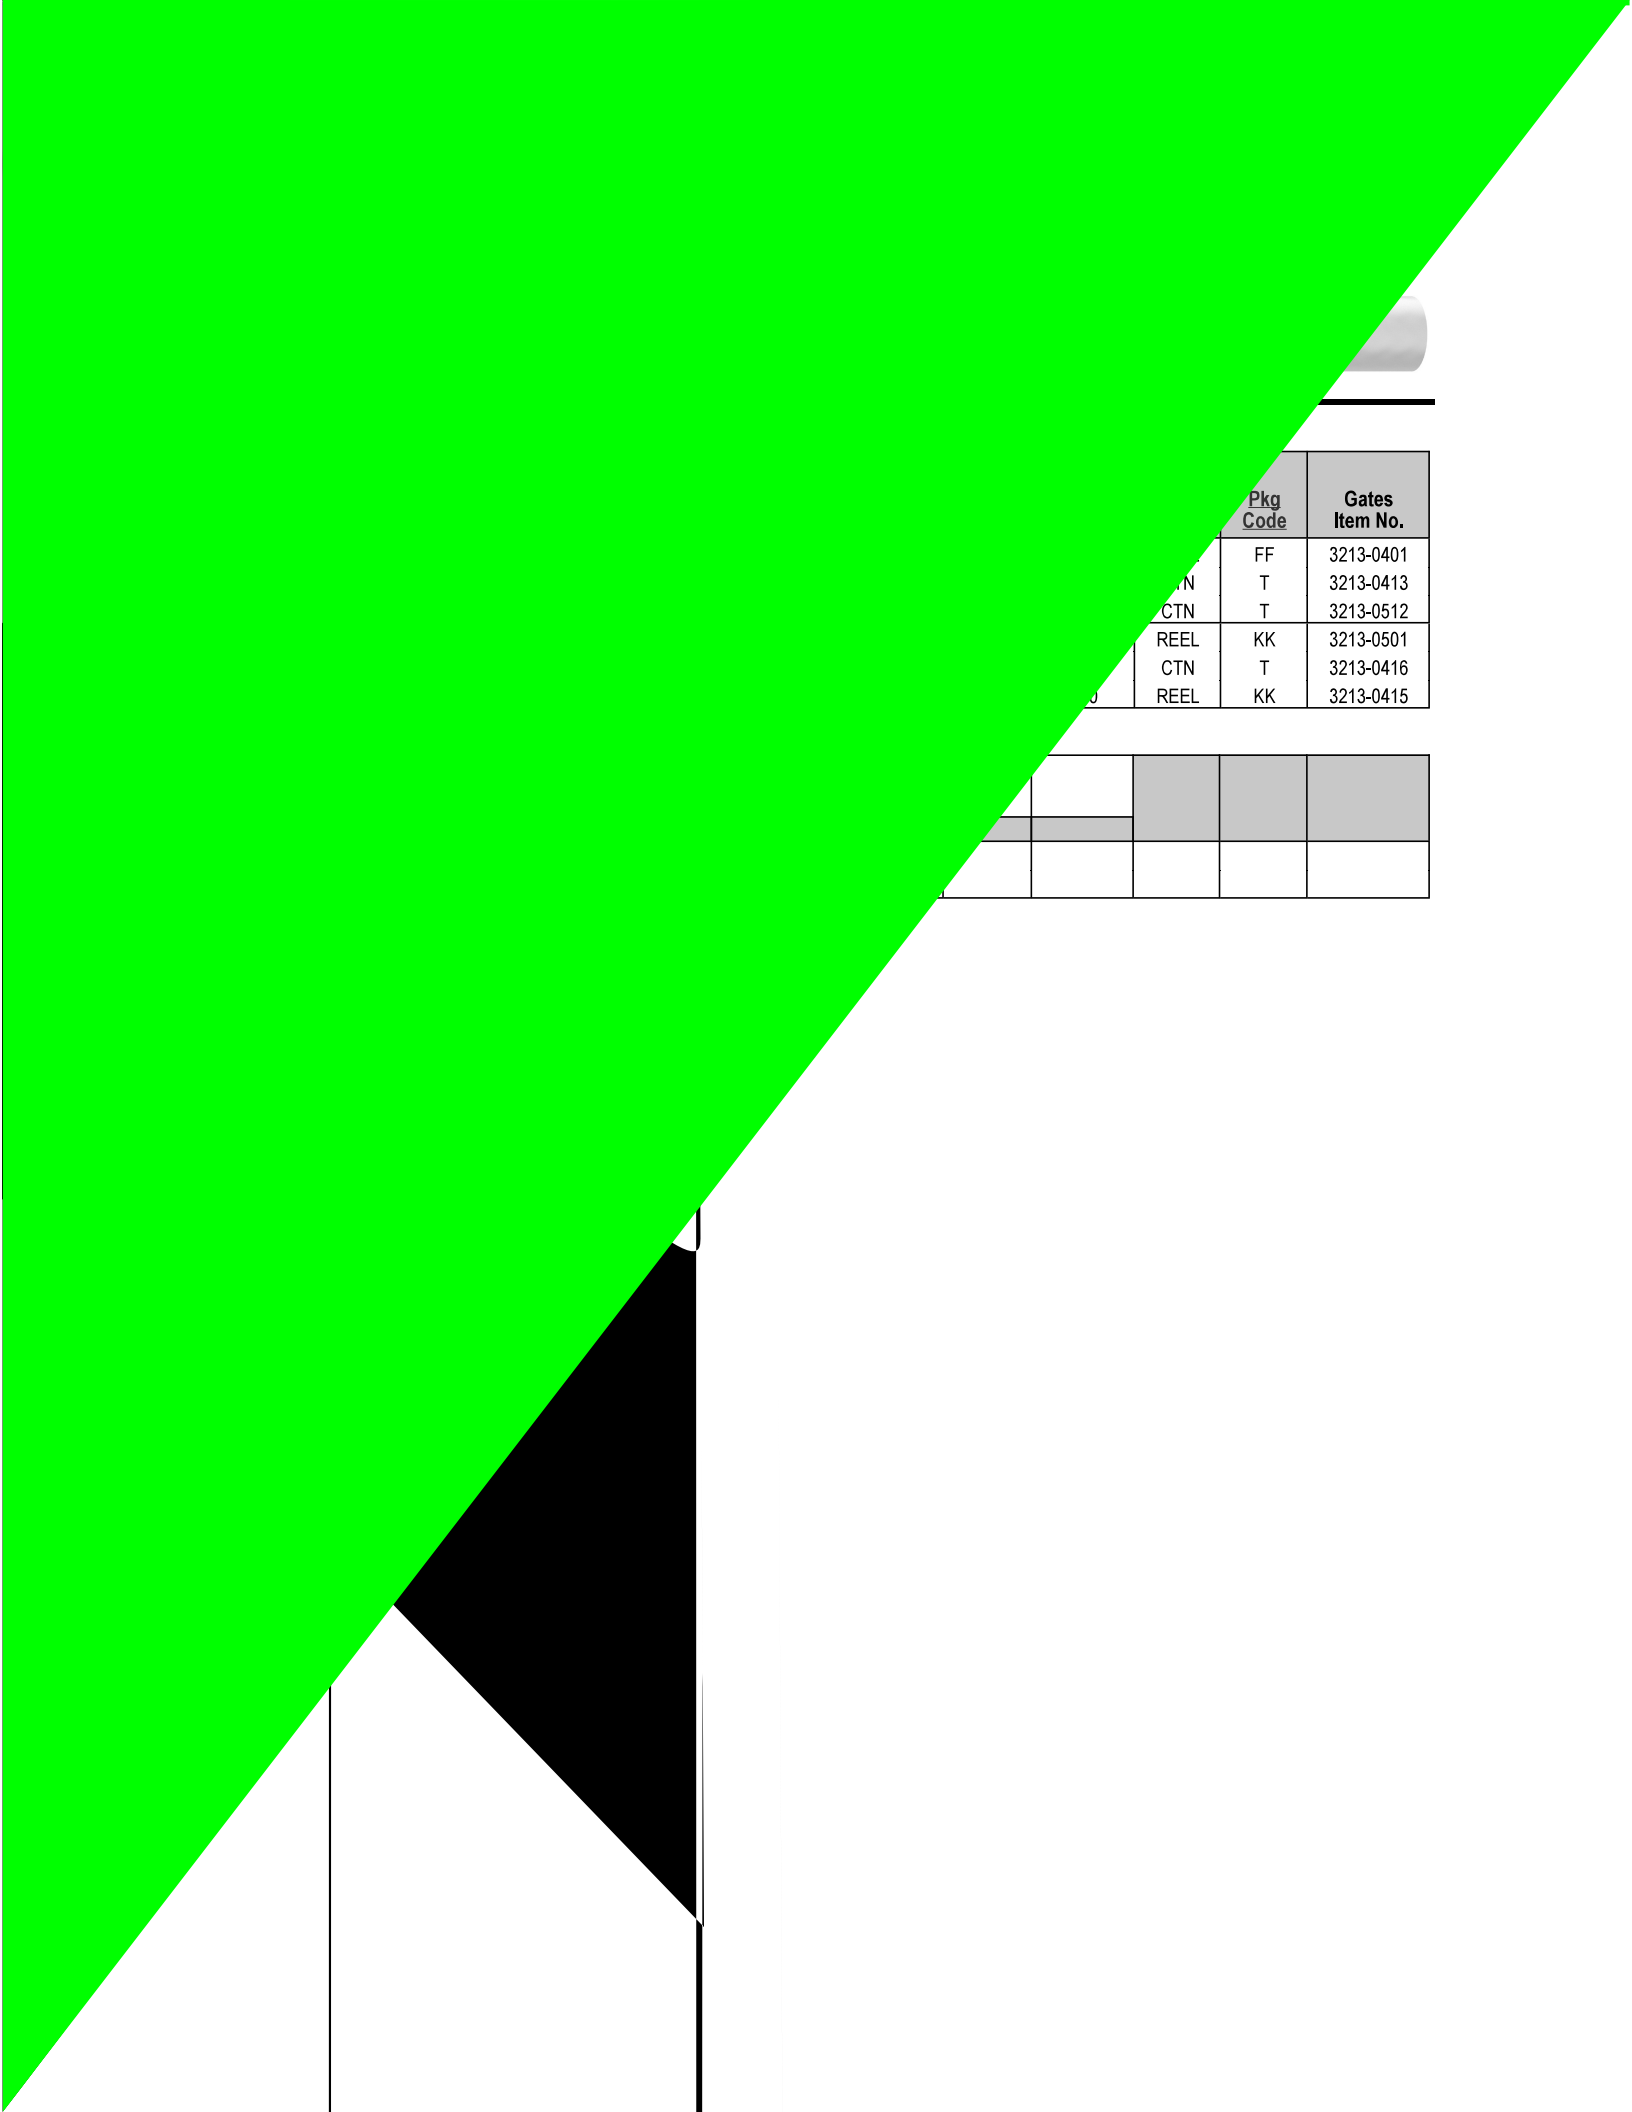

	Pkg Code	Gates Item No.
	FF	3213-0401
CTN	T	3213-0413
CTN	T	3213-0512
REEL	KK	3213-0501
CTN	T	3213-0416
REEL	KK	3213-0415

