




AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1260 EYE STREET, N.W.
WASHINGTON, D.C. 20005

Reproduced by GLOBAL ENGINEERING
DOCUMENTS With The Permission Of AIA
Under Royalty Agreement Sales of Individual
Standards Do Not Include Revision Service
For Subsequent Use Of This Document
Check To See If It Has Been Revised.



THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE
SAME PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS
FROM THE LAST DATE OF APPROVAL SHOWN HEREON.

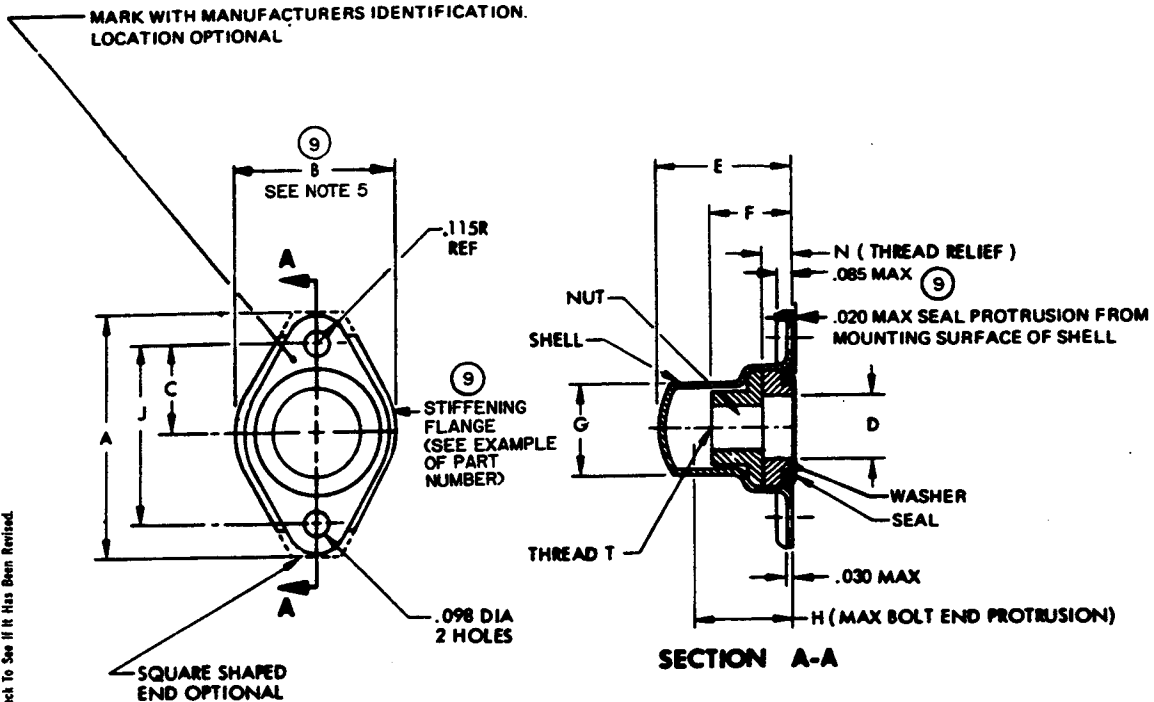

THREAD T	DASH NUMBER	A MAX	B MAX	C ±.005	D MIN	E MAX	F MAX	G MAX	BOLT END H MAX	J ±.002
.1120-40UNJC-3B	04	.840	.443	.295	.142	.405	.204	.352	.340	.590
.1380-32UNJC-3B	06				.173		.221			
.1640-32UNJC-3B	08				.194		.268			
.1900-32UNJF-3B	3	1.000	.635	.376	.220	.560	.268	.419	.490	.752
.2500-28UNJF-3B	4				.280		.350			

THREAD T	N MIN	WEIGHT/100 LBS APPROX	
		STEEL	CRES
.1120-40UNJC-3B	.070	.41	.50
.1380-32UNJC-3B		.42	.51
.1640-32UNJC-3B		.43	.52
.1900-32UNJF-3B		.45	.54
.2500-28UNJF-3B	.105	1.00	1.10


- MATERIAL:**
- NUT - STEEL, SEE PROCUREMENT SPECIFICATION, CRES, AMS5525 (UNS S66286) OR AMS5732 (UNS S66286), A-286, NON-MAGNETIC
 - SHELL - STEEL, SEE PROCUREMENT SPECIFICATION, CRES, AMS5525 (UNS S66286), A-286, NON-MAGNETIC
 - WASHER - ALUMINUM ALLOY OR STEEL, SEE PROCUREMENT SPECIFICATION, CRES, AMS5525 (UNS S66286) OR AMS5732 (UNS S66286), A-286, NON-MAGNETIC
 - SEAL - 225°F: RUBBER, MIL-R-6855, CLASS 1, GRADE 60, DUROMETER A60, COLOR BLACK
 - 350°F: FLUROSILICONE RUBBER, MIL-R-25988, TYPE 11, CLASS 1, DUROMETER A70, COLOR BLUE
 - 450°F: SILICONE RUBBER, AMS3304, DUROMETER A70, COLOR RED
- FINISH:**
- STEEL NUT, SHELL AND WASHER - CLEAN AND PASSIVATE PER QQ-P-416, TYPE 11, CLASS 2.
 - CRES NUT, SHELL AND WASHER - CLEAN AND PASSIVATE PER MIL-S-5002. WHEN CODED C (SEE SHEET 2), NUT - SILVER PLATE PER MIL-N-25027 TO A MINIMUM THICKNESS ON SURFACES WHICH CAN BE TOUCHED BY A .7500 (3/4 - INCH) BALL; THREADS SHALL SHOW COMPLETE COVERAGE BUT THICKNESS REQUIREMENT ON THREADS IS WAIVED
 - ALUMINUM ALLOY WASHER - ANODIZE OR CHEMICAL FILM PER MIL-N-25027, EXCEPT ANODIZE SHALL BE LIMITED TO TYPE I OR TYPE II. APPROVED DRY FILM LUBRICANT ON NUTS WHEN CODED AS EXPLAINED ON SHEET 2.

LIST OF CURRENT SHEETS

NO.	REV.
1	9
2	8
3	5

CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE


THIRD ANGLE PROJECTION





⑧

EXAMPLE OF PART NUMBER

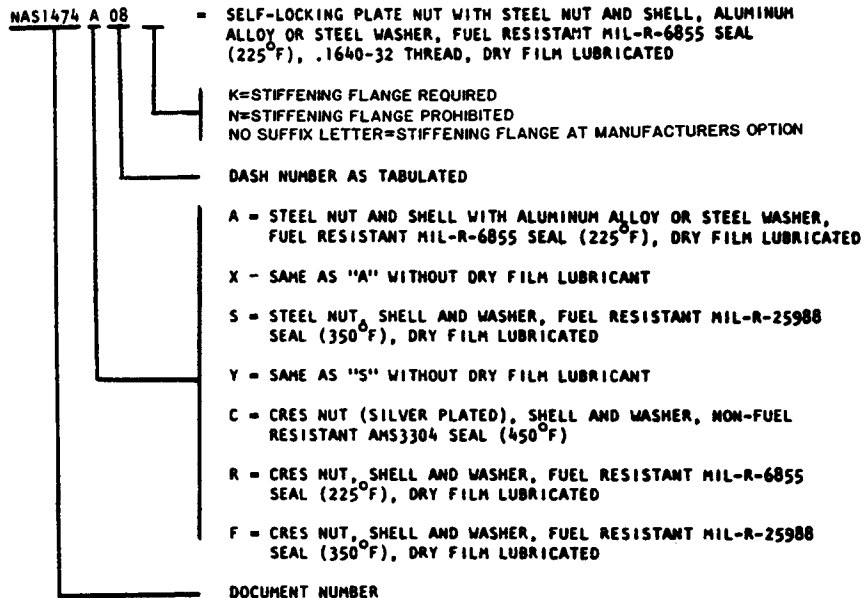

FLOAT: MINIMUM RADIAL FLOAT .015.
MAXIMUM AXIAL FLOAT .030.

PRESSURE RANGE: 0 TO 50 PSIG.

TEMPERATURE RANGE: MIL-R-6855 RUBBER (-65°F TO 225°F).
MIL-R-25988 FLUOROSILICONE RUBBER (-65°F TO 350°F).
AMS3304 RUBBER (-65°F TO 450°F).

THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879 BEFORE LUBRICATION.

MARKING: THE SMALLEST CONTAINER USED TO PACKAGE "A", "X" AND "R" CODED PARTS SHALL BE MARKED WITH THE CURE DATE (QUARTER AND YEAR) OF THE OLDEST RUBBER SEAL CONTAINED THEREIN. THE AGE OF RUBBER SEALS SHALL NOT EXCEED 20 QUARTERS AT THE TIME OF DELIVERY TO THE CONTRACTOR.

⑧

- NOTES:
1. THREAD ELEMENT SHALL BE CAPABLE OF ENGAGEMENT WITH A BOLT IN THE MAXIMUM MISALIGNED POSITION.
 2. NUT AND SHELL SHAPE OPTIONAL, WITHIN SPECIFIED MAXIMUM DIMENSIONS.
 3. MAGNETIC PERMEABILITY OF CRES NUTS SHALL BE LESS THAN 2.0 (AIR = 1.0) FOR A FIELD STRENGTH H = 200 OERSTEDS. MAGNETIC PERMEABILITY INDICATOR PER MIL-I-17214 OR EQUIVALENT.
 4. NACA RIVETING METHOD FOR ATTACHMENT NOT TO BE USED.
 5. B DIMENSION MAY BE .015 LARGER THAN MAX VALUES SHOWN IN TABLE FOR ITEMS WITH K SUFFIX (STIFFENING FLANGE REQUIRED) ONLY.

⑧

NAS 1474

SHEET 2

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1260 EYE STREET, N.W.
WASHINGTON, D.C. 20005

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST DATE OF APPROVAL SHOWN HEREON.

APPROVAL DATE: JUNE 1960 REVISION ⑧ 25 April 1991

NATIONAL AEROSPACE STANDARD

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC., 1725 DE SALES STREET, N. W., WASHINGTON, D. C. 20036

PERFORMANCE: QUALIFICATION TEST

- 1.0 ALL REQUIREMENTS OF MIL-N-25027 PERTAINING TO STEEL FLOATING PLATE NUTS INCLUDING AXIAL STRENGTH REQUIREMENTS OF TABLE 1 FOR REGULAR STEEL NUTS, SHALL APPLY TO THIS PART EXCEPT THE MAXIMUM TEMPERATURE SHALL BE 225°F, 350°F AND 450°F, AS APPLICABLE. A POSITIVE SEAL SHALL BE REQUIRED AFTER TESTING PER PARAGRAPH 3.9 (PUSH OUT) AND 3.8.3 (TORQUE OUT) OF MIL-N-25027. THE PUSH OUT AND TORQUE OUT TESTS SHALL BE CARRIED TO A PROOF LOAD EQUAL TO THE REQUIREMENT FOR THE APPLICABLE SIZE. ALL TESTS SHALL BE PERFORMED ON A SINGLE SHEET OF 2024-T3 OR 7075-T6 ALUMINUM ALLOY, NOMINAL THICKNESS OF .312 INCHES, AND HAVING A MINIMUM OF TEN (10) INCHES SQUARE (100 SQUARE INCHES) UNSUPPORTED AREA. SIX (6) NUTS SHALL BE EQUALLY SPACED ON A CIRCLE HAVING A DIAMETER OF SEVEN AND ONE HALF (7-1/2) INCHES. THE NUTS SHALL BE ATTACHED TO THE PLATE BY SOCKET HEAD CAP SCREWS THREADED INTO BLIND HOLES TAPPED TO A DEPTH OF APPROXIMATELY .218 INCHES WITH #3-48 SCREWS. THE #3-48 SCREWS SHALL BE SEATED TO FOURTEEN (14) INCH-POUNDS. INSTALL BOLTS IN NUTS USING A SEATING TORQUE THREE (3) TIMES THE MAXIMUM LOCKING TORQUE OF MIL-N-25027. THREE (3) NUTS SHALL BE TESTED WITH BOLTS INSTALLED AND THREE (3) NUTS WITH BOLTS REMOVED.
- 2.0 A POSITIVE SEAL SHALL BE CONSIDERED TO MEAN NO LEAKAGE BY VISUAL EXAMINATION, USING DYED LIQUID, WHEN SUBJECTED TO A STATIC DIFFERENTIAL PRESSURE OF 50 PSI +2 -0 PSI FOR A PERIOD OF FIVE (5) MINUTES MINIMUM. THE LIQUIDS USED SHALL BE FUELS CONFORMING TO MIL-J-5624 OR TT-S-735, TYPE III, FOR 225°F AND 350°F SEALS, AND METHYL ALCOHOL FOR 450°F SEALS. IN ADDITION, A CYCLING TEST SHALL BE PERFORMED CONSISTING OF A CYCLING PRESSURE OF BETWEEN 0 AND 50 PSI FOR 1000 CYCLES. A CYCLE BEING COMPLETED APPROXIMATELY EVERY TWELVE (12) SECONDS.
- 2.1 A POSITIVE SEAL SHALL BE PROVIDED AFTER AGING AN EMPTY TEST FIXTURE WITH NUTS MOUNTED IN A HOT AIR FURNACE AT 450°F ±10°F, 350°F ±10°F OR 225°F ±10°F, AS APPLICABLE FOR A PERIOD OF 4 HOURS ±10 MINUTES. A CYCLING TEST SHALL BE PERFORMED AT TEMPERATURE WITHOUT LIQUID USING AIR PRESSURE ALONE. THE TEST PRESSURES AND PROCEDURES OF PARAGRAPH 2.0 SHALL APPLY EXCEPT THE NUMBER OF PRESSURE CYCLES SHALL BE LIMITED TO 100. DURING THIS PERIOD, SINCE THERE IS NO LIQUID IN THE TANK, THERE IS NO CHECK FOR LEAKAGE.
- 2.2 IMMEDIATELY AFTER ELEVATED TEMPERATURE TEST CYCLES, THE FIXTURE SHALL BE REMOVED FROM THE FURNACE AND ALLOWED TO COOL TO ROOM TEMPERATURE. AT ROOM TEMPERATURE, LIQUID SHALL BE ADDED AND POSITIVE SEAL SHALL BE PROVIDED IN LIQUIDS WHEN TESTED IN ACCORDANCE WITH TEST PRESSURES AND PROCEDURES OUTLINED IN PARAGRAPH 2.0.
- 2.3 IN ADDITION, THE SAMPLES TESTED IN 2.1 SHALL PROVIDE A POSITIVE SEAL AFTER A CYCLING TEST HAS BEEN PERFORMED AS FOLLOWS: PLACE TEST FIXTURE IN A COLD BOX AT -65°F ±10°F AND ALLOW TO SOAK FOR A PERIOD OF 4 HOURS ±10 MINUTES. AFTER SOAKING AT THIS TEMPERATURE, APPLY A STATIC PRESSURE OF 50 PSI ±5 PSI FOR A PERIOD OF ONE (1) HOUR. A CYCLING TEST SHALL THEN BE PERFORMED BY HOLDING A PRESSURE OF 50 PSI ±5 PSI ON THE TEST FLUID FOR A PERIOD OF TWENTY (20) SECONDS AND RELEASING PRESSURE FOR TEN (10) SECONDS. REPEAT THIS THIRTY (30) SECOND CYCLE FOR 120 CYCLES. ALL TESTING UNDER THIS PARAGRAPH SHALL BE PERFORMED AT -65°F ±10°F.

PROCUREMENT SPECIFICATION:

MIL-N-25027 EXCEPT AS NOTED. ALL NUTS SHALL MEET QUALIFICATION AND INSPECTION REQUIREMENTS. MANUFACTURERS SHALL PROVIDE EVIDENCE OF QUALIFICATION WHEN REQUIRED. TESTING SHALL BE PERFORMED BY MANUFACTURER OR INDEPENDENT LABORATORY. PROCURING AGENCY MAY CONDUCT CONFIRMING QUALIFICATION TESTS. NO QPL SHALL BE ESTABLISHED.

AIA AND ITS COMMITTEES WILL NOT INVESTIGATE THE APPLICABILITY OF PATENTS TO THE SUBJECT MATTER OF THIS STANDARD AND IN RESPECT THEREOF DO NOT ASSUME ANY LIABILITY TO PATENT OWNERS OR TO PROSPECTIVE USERS

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST DATE OF APPROVAL SHOWN HEREON

NAS 1474

SHEET 3