


Wheels with brakes - 4" 5" 6" 8" 10" 12" Diameter

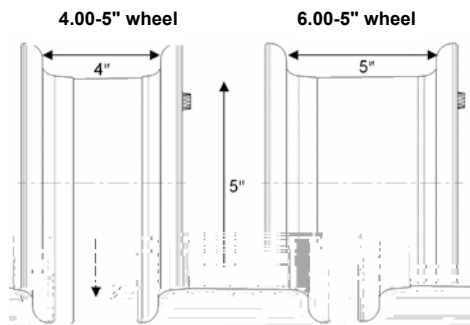

Conversion Lbs/kg

1 Lb <--> 0,45 kg
1 kg <--> 2,2 Lbs

Certification indication

C_{STC} C_{STC}
TSO

General technical data :

- Wheel in 2 halves
- Made of high strength aluminum, machined from billet
- Sulfuric anodizing
- Tubeless for safety (O-ring and rigid valve)
- Waterproof bearings → no repack (stainless steel available in option)
- Patented brake calipers, Aerotec® with stainless steel pistons
- Sintered metallic brake pads, bounded on a backplate (not riveted)
- Floating disc
- Steel or aluminum axles (see Axle tab)
- Tubeless tires (see Tire tab)
- Stainless steel bearings optional

Depending on the aircraft specifications (weight, landing speed, engine horse power, tire diameter, ...) and its use, you can refer to the following pages for the wheel and brake choice.

Contact us and we will help you.

Notes :

- Finish : the red anodizing is the standard color for all parts. Other colors are available for the wheels, with an addition charge and leadtime. The brake calipers always remain red. ATTENTION colors may vary from one wheel to another.
- Wheel cap optional
- The first types of 5" and 6" wheels were made of 3 flanges instead of two with 3 O'ring seals instead of 2 (2 between the flanges and 1 for the valve).

 → [Youtube BERINGER AERO technical support](#)

[How to remove a tubeless tire](#) → 

 → [How to mount a tubeless tire](#)

[How to change the wheel clips](#) → 



Wheel / Brakes 4" diameter

**4" Wheel
RF-013****The lightest 4" wheel/brake in the World! 2.43Lbs (1.10kg)**

For light Aircraft up to 1102 Lb (500kg) MTOW

Single brake caliper with Aerotec® patent : stainless steel piston - sintered pads

Ultralight stainless steel disc

Tires available : see tire pages

Aluminum axle : see axle pages

Two bearing dimensions available (two axle dimensions)



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper (Disc) P/N	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-013.1	3.50-4"	4"	Ø25-Ø15	528 (230)	1848 (838)	1.48 (0.672)	EA-009.1 (DSC-013)	1400	105000	1.17 (0.530)

Wheel / Brakes 5" diameter

**5" Wheel
Standard****For LSA, experimental and gliders**

Widths available : 4.00 and 5.00

Single brake caliper with Aerotec® patent : stainless steel piston - sintered pads

Stainless steel floating disc

Tires available : see tire pages

Aluminum or steel axle : see axle pages

Option : wheel cap BCH-002



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper (Disc) P/N	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-019 CSTC	5.00-5"	5"	Ø30-Ø25	1518 (688)	6820 (3093)	3.42 (1.550)	EA-016 (DSC-006)	3120	140000	1.50 (0.682)
RF-020 CSTC	4.00-5"	5"	Ø30-Ø25	1518 (688)	6820 (3093)	3.24 (1.469)	EA-016 (DSC-006)	3120	140000	1.50 (0.682)

Contacts

Webshop

Aerotec® Patents

History/ Values

Certified kits/STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air PedalsRegulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGER Aero
Technology

They trust us

Contacts

Webshop

AeroTEC Patents

History/ Values

Certified kits /STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air Pedals

Regulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGER Aero
Technology

They trust us

5" Wheel HL

For two seater Aircraft Van's type up to high landing speed Aircraft Lancair, Glasair, Aerobatic type

Widths available : 4.00 and 5.00

Different types of brakes depending on the required energy

- Single HE 2 piston caliper or Dual 4 piston caliper Aerotec® patent / cooling fins
- Sintered pads
- Several high strength floating discs

Tires available : see tire pages - Aluminum or steel axle : see axle pages

Option : wheel cap BCH-002



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper P/N (Disc included)	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-018 	5.00-5"	5"	ø30-ø25	1518 (688)	6820 (3093)	3.27 (1.485)	EA-002 (DSC-008)	4500	210000	2.34 (1.060)
							EA-002.2 (DSC-008.2)	4500	361000	2.89 (1.310)
RF-022	5.00-5"	5"	ø35-ø35	1518 (688)	6820 (3093)	3.27 (1.485)	EA-002 (DSC-008)	4500	210000	2.34 (1.060)
RF-021	4.00-5"	5"	ø30-ø25	1518 (688)	6820 (3093)	3.27 (1.485)	EA-002 (DSC-008)	4500	210000	2.34 (1.060)

5" SL Wheel Vintage spoke wheel/brake

For Vintage Aircraft < 1350 Lbs

Dimensions 5.00-5" /aluminum wheel - stainless steel spokes

Single brake caliper - Aerotec® patent : stainless steel piston

Stainless steel floating disc - Sintered pads

Delievered with tire : 3.50-19" vintage style



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Caliper P/N (Disc included)	Braking torque in.lbs	Max RTO energy ft/lbs	Complete set (wheel/brake/spokes/tire/tube) Weight lbs (Kg)
RF-041	5.00-5"	5"	ø30-ø25	968 (439)	3388 (1536)	EA-016.111	3120	140000	1.50 (0.682)

Wheel / Brakes 6" diameter

6" Wheel SL For Ultralight Aircraft and LSA

Widths available : 4.00 and 6.00 - Ultralight stainless steel floating disc
 Wheel RF-009 : if tires >29" use DUAL caliper EA-016.20/017.20 (higher braking torque).
 Wheel RF-014 6.00-6 SL : bigger bearing in the brake wheel flange
 Tires available : see tire pages - Aluminum or steel axle : see axle pages
 Option : wheel cap BCH-002 (6.00-6") or BCH-003 (4.00-6")



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper P/N (Disc included)	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-004	4.00-6"	6"	Ø30-Ø25	968 (439)	3388 (1536)	3.14 (1.426)	EA-016 / 017	3120	140000	1.50 (0.682)
RF-009	6.00-6"	6"	Ø30-Ø25	968 (439)	3388 (1536)	3.48 (1.580)	EA-016 / 017	3120	140000	1.50 (0.682)
							EA-016.20 / 017.20 Dual	6240	140000	3.48 (1.58)
RF-014	6.00-6"	6"	Ø40-Ø25	968 (439)	3388 (1536)	3.45 (1.563)	EA-016 / 017	3120	140000	1.50 (0.682)
							EA-016.20 / 017.20 Dual	6240	140000	3.45 (1.56)

6" Wheel LE For two seater STOL Aircraft**LE**

Brake caliper : 2 piston - Aerotec® patent / cooling fins
 Floating disc
 Tires available : see tire pages
 Option : wheel cap BCH-006



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper P/N (Disc included)	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-015.1 C _{STC} TSO	6.00-6"	6"	Ø40-Ø35	1430 (648)	5005 (2270)	4.37 (1.980)	EA-003.2 (DSC-014)	5130	250000	2.47 (1.120)
							EA-003.8 (DSC-014)	5130	250000	2.47 (1.120)
RF-015.2 C _{TSO}	6.00-6"	6"	Ø40-Ø30	1430 (648)	5005 (2270)	4.53 (2.055)	EA-003.2 (DSC-014)	5130	250000	2.47 (1.120)
							EA-003.8 (DSC-014)	5130	250000	2.47 (1.120)

Contacts

Webshop

Aerotec® Patents

History/ Values

Certified kits/STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air PedalsRegulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGER Aero
Technology

They trust us

Contacts

Webshop

AeroTEC® Patents

History/ Values

Certified kits / STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air Pedals

Regulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGER Aero
Technology

They trust us

6" Wheel HE For Aircraft between 1.2 and 1.8 tons (2,650 and 3,960 Lbs)

Different types of brakes depending on the required energy

- Single HE 2 piston caliper or Dual 4 piston caliper Aerotec® patent / cooling fins
- Sintered pads
- Several high strength floating discs

Tires available : see tire pages - Aluminum axle : see axle pages

Option : wheel cap BCH-004



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper (Disc) P/N	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-006 C _{STC} TSO	6.00-6"	6"	Ø40-Ø35	2080 (943)	7480 (3392)	4.99 (2.262)	EA-003 (DSC-009)	4900	355000	3.31 (1.500)
							EA-003.3 (DSC-009.3)	4900	500000	4.22 (1.914)
							EA-003.4 (DSC-009.3) Dual	9800	510000	6.11 (2.770)
							EA-003.5 (DSC-009.4) Dual	9800	550000	6.81 (3.090)
							EA-003.7 (DSC-009.4)	4900	558000	4.72 (2.140)
							EA-004 (DSC-009.3)	4900	500000	4.14 (1.880)
							EA-004.1 (DSC-009.5) Dual	9800	975000	7.63 (3.460)
							EA-004.2 (DSC-009.5) Dual	9800	975000	7.56 (3.430)
RF-016 C _{STC}	6.00-6"	6"	Ø45-Ø45	1870 (848)	6545 (2968)	4.81 (2.180)	EA-004.3 (DSC-009.5) Dual	9800	980000	7.65 (3.470)
							EA-003.2 (DSC-014)	5130	250000	2.47 (1.120)
							EA-003.3 (DSC-009.3)	4900	500000	4.22 (1.914)

6" Wheel HL For Aircraft up to 2.5 tons (5,500 Lbs)

Different types of brakes depending on the required energy

- Single HL 2 piston caliper or Dual 4 piston caliper Aerotec® patent / cooling fins
- Sintered pads
- Several high strength floating discs

Tires available : see tire pages - Aluminum axle : see axle pages

Option : wheel cap BCH-004



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper (Disc) P/N	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-017 C _{STC} TSO	6.00-6"	6"	Ø40-Ø35	2310 (1047)	9460 (4291)	5.75 (2.067)	EA-004.1 (DSC-009.5) Dual	9800	975000	7.63 (3.460)
							EA-004.2 (DSC-009.5) Dual	9800	975000	7.56 (3.430)
							EA-004.3 (DSC-009.5) Dual	9800	980000	7.63 (3.460)

Wheel / Brakes 8" diameter

8" Wheel SL For Ultralight Aircraft and LSA


SL

Ultralight stainless steel floating disc

Single or dual brakes available

Tires available : see tire pages - Aluminum or steel axle : see axle pages

Option : wheel cap BCH-002

**8" Wheel HE For Aircraft > 2,5 tonnes (5,500 Lbs)**

HE

Brake caliper : 2 pistons or Dual 4 pistons - Aerotec® patent / cooling fins

Floating disc - Tires available : see tire pages

Aluminum or steel axle : see axle pages - Option : wheel cap BCH-001



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper P/N (Disc included)	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-028	7.00-8"	8"	Ø30-Ø25	968 (439)	3388 (1536)	5.56 (2.52)	EA-016 / 017	3120	140000	1.50 (0.682)
							EA-016.20 / 017.20 Dual	6240	140000	3.48 (1.58)
RF-010 CSTC	18x5.5"	8"	Ø38.1-Ø38.1	3058 (1387)	9625 (4365)	7.94 (3.600)	EA-008.1+EA-008.2 (DSC-012) PQT-012	9300	1115000	9.04(4.100)
							EA-008.1+EA-008.2 (DSC-012) PQT-013	9800	1200000	9.04(4.100)
RF-010.1	18x5.5"	8"	Ø38.1-Ø38.1	5507 (2497)	19275 (8743)	8.31 (3.768)	EA-008.7 (DSC-012.2) Dual	18600	1452538	12.81(5.812)

Wheel / Brakes 10" diameter

10" Wheel LE Designed for two seater STOL

LE


Brake caliper : 2 pistons - Aerotec® patent / cooling fins

Floating disc

Tires available : see tire pages

Enjoliveurs de wheel (modèle suivant l'axe)

CSTC



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper (Disc) P/N	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-024	8.50-10"	10"	Ø40-Ø40	1460 (662)	5010 (2272)	8.64 (3.918)	EA-010.1 (DSC-015)	8721	303000	3.50 (1.587)

Contacts

Webshop

Aerotec® Patents

History/ Values

Certified kits/STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air PedalsRegulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGER Aero
Technology

They trust us

Contacts

Webshop

AeroTech Patents

History/ Values

Certified kits /STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air Pedals

Regulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGER Aero
Technology

They trust us

10" Wheel Those two wheels were designed for the PC-6 Pilatus

12" Wheel



- Brake caliper : 3 stainless steel pistons - Aerotec® patent
- Sintered pads (two types depending on the use)
- Long life floating discs (two types depending on the use)
- wheel caps included




Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper (Disc) P/N	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-011	24x7.7"	10"	Ø50-Ø35	3080 (1397)	8160 (3701)	14.42 (6.543)	EA-001 (DSC-011 or DSC-011.2)	16900	623977	11.06 (5.015)
RF-003	11.00-12"	12"	Ø50-Ø35	3080 (1397)	15820 (8160)	20.72 (9.400)	PQT-008 or PQT-016			

10" Wheel HL Brake caliper : Dual 4 pistons - Aerotec® patent / cooling fins: Steel floating disc Wheel cap BCH-001



Wheel P/N	Dimension	Ø	Bearings (Axle)	Static load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Caliper (Disc) P/N	Braking torque in.lbs	Max RTO energy ft/lbs	Brake weight Lbs (Kg)
RF-029	4.4x10"	10"	Ø50.8-Ø50.8	4520 (2050)	15820 (7175)	13.84 (6.277)	EA-011.2 (DSC-017.2) Dual	22350	1700000	15.64 (7.096)
RF-032	6.50-10"	10"	Ø25.4-Ø38.1	4520 (2050)	15820 (7175)	13 (5.91)	EA-018.1 (DSC-017.2) Dual	22920	1859000	14.84 (6.731)

Nose wheels - Tailwheels - 4" 5" 6" 12.5" Diameter

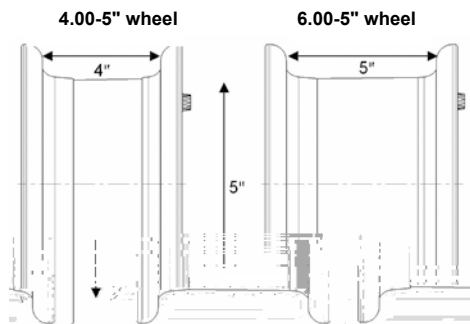

Conversion Lbs/kg

1 Lb <--> 0,45 kg
1 kg <--> 2,2 Lbs

Certification indication



→ [Youtube BERINGER AERO technical support](#)

Wheel features :

- Wheel in 2 halves
- Made of high strength aluminum, machined from billet
- Sulfuric anodizing
- Tubeless for safety (O-ring and rigid valve)
- Waterproof bearings → no repack (stainless steel available in option)
- Steel or aluminum axles (see Axle tab)
- Tubeless tires (see Tire tab)
- Stainless steel bearings optional

Contact us and we will help you.

Notes :

- Finish : the red anodizing is the standard color for all parts. Other colors are available for the wheels, with an addition charge and leadtime. The brake calipers always remain red. ATTENTION colors may vary from one wheel to another.
- Wheel cap optional
- The first types of 5" and 6" wheels were made of 3 flanges instead of two with 3 O'ring seals instead of 2 (2 between the flanges and 1 for the valve).



→ [How to remove a tubeless tire](#)

[How to mount a tubeless tire](#) →


[Contacts](#)
[Webshop](#)
[AeroTEC Patents](#)
[History/ Values](#)
[Certified kits/STCs](#)
[Exp. Kits](#)
[SensAIR®](#)
[Landing Gears
ALG/B'Flex
Shock Wheel](#)
[Wheels/Brakes](#)
[Nose-Tailwheels](#)
[Tires](#)
[Wheel Axles](#)
[Brake Controls
Rudd'Air Pedals](#)
[Regulators
Anti-skid](#)
[Parking Valves](#)
[Hoses/Fittings](#)
[Spare Parts](#)
[Tools](#)
[FAQs](#)
[BERINGER Aero
Technology](#)
[They trust us](#)

Nose wheels / Tailwheels

Contacts

Webshop

Amoite Patents

History/ Values

Certified kits / STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air Pedals

Regulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGER Aero
Technology

They trust us

Tailwheel

Wheel 200x50 with tube RA-004

Designed for Pipistrel Sinus/Virus

Delivered mounted with tire 200x50/tube (price of tire and tube not included)

For axle 5/16" (see axle pages)

Weight : 9.45 oz / 268g

Fork mounting only

Wheel P/N	Dimension	ø mm	Ball bearings	Static Load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)
RA-004	200X500	200	ø10-ø10	337 (153)	1349 (612)	0.59 (0.268)



Wheels 4" diameter

4" Wheel Ultra light


Nose wheel for ultralight aircraft and LSA or bush tailwheel

High load - Cantilever or fork mounting (see axle pages)

Tires available (see tire pages)



Wheel P/N	Dimension	ø	Ball bearings	Static Load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Axle P/N (fork mounting)	Axle dimensions (standard sizes - Other dimensions available - ask us)
RA-003	3.50-4"	4"	ø20-ø15	539 (245)	1888 (856)	1.36 (0.620)	AXP-003 AXP-003.1 AXP-003.2 AXP-003.3 AXP-003.4	X=111 / Z=6.4 X=111 / Z=8.2 X=89 / Z=8.2 Z=80 / Z=12.8 X=89 / Z=6.2

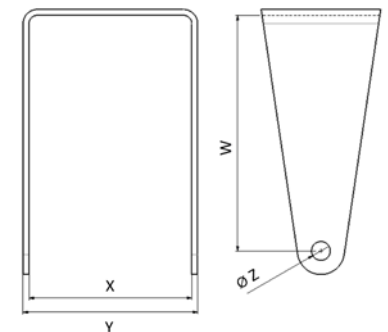

4" Wheel Fork mounting (Axle dimensions in the table)
RA-001 : for TT tire - RA-012 : for TL tire

Wheel P/N	Dimension	Ø	Ball bearings	Static Load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Axle P/N (fork mounting)	Axle dimensions (fork mounting)
RA-012	5.00-4"	4"	Ø30-Ø25	1034 (469)	2810 (1274)	2.43 (1.1)	AV-PIL-001	X=135 / Z=12
RA-001 CSTC	5.00-4"	4"	Ø30-Ø25	1034 (469)	2810 (1274)	2.43 (1.1)	AV-PIL-001	X=135 / Z=12

Wheels 5" diameter


5" Wheel Widths available : 4.00 and 5.00 - Cantilever or fork mounting (see axle pages)
(Axle dimensions in the table) - Tires available (see tire pages)

Wheel P/N	Certification	Dimension	Ø	Ball bearings	Static Load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Axle P/N (fork mounting)	Axle dimensions (fork mounting)
RA-015	CTSO	4.00-5"	5"	Ø30-Ø25	1140 (517)	5130 (2326)	3.10 (1.41)	AXP-007.1 AXP-007.2	X=107 / Z=9.8 X=138 / Z=9.8
RA-014	CTSO	5.00-5"	5"	Ø30-Ø25	1551 (703)	6968 (3160)	3.28 (1.490)	AXP-005 AXP-005.1	X=146.5 / Z=9.8 X=146.5 / Z=10

Wheels 6" diameter

6" Wheel Cantilever or fork mounting (see axle pages) - Widths available : 4.00 and 6.00
SL Tires available (see tire pages)
Note : other axle dimensions available. Contact us.

Wheel P/N	Dimension	Ø	Ball bearings	Static Load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Axle P/N (fork mounting)	Axle dimensions (fork mounting)
RA-009	4.00-6"	6"	Ø30-Ø25	970 (440)	3396 (1540)	2.93 (1.327)	AV-JAB-003	X=130 / Z=6.5
RA-010	6.00-6"	6"	Ø30-Ø25	970 (440)	3396 (1540)	3.26 (1.48)	AXP-004	X=210 / Z=8.1


[Contacts](#)
[Webshop](#)
[AeroPatents](#)
[History/ Values](#)
[Certified kits/STCs](#)
[Exp. Kits](#)
[SensAIR®](#)
[Landing Gears
ALG/B'Flex
Shock Wheel](#)
[Wheels/Brakes](#)
[Nose-Tailwheels](#)
[Tires](#)
[Wheel Axles](#)
[Brake Controls
Rudd'Air Pedals](#)
[Regulators
Anti-skid](#)
[Parking Valves](#)
[Hoses/Fittings](#)
[Spare Parts](#)
[Tools](#)
[FAQs](#)
[BERINGER Aero
Technology](#)
[They trust us](#)

Nose wheels / Tailwheels

Contacts

Webshop

AMOTEC® Patents

History/ Values

Certified kits/STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air Pedals

Regulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGERAero
Technology

They trust us


6" Wheel LE Cantilever or fork mounting (see axle pages)
(Axle dimensions in the table)
Tires available (see tire pages)

Wheel P/N	Dimension	Ø	Ball bearings	Static Load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)	Axle P/N (fork mounting)	Axle dimensions (fork mounting)
RA-016	6.00-6"	6"	Ø40-Ø30	1430 (660)	5005 (2310)	4.45 (1.830)	AXP-006.1 AXP-006.2	X=195.6 / Z=38.1 X=167 / Z=31



6" Wheel HE-HL Cantilever or fork mounting (see axle pages)
Tires available (see tire pages)

Wheel P/N	Dimension	Ø	Ball bearings	Static Load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)
RA-005 C _{TSO}	6.00-6" HE	6"	Ø40-Ø35	2135 (968)	7642 (3466)	4.56 (2.070)
RA-013 C _{TSO}	6.00-6" HL	6"	Ø40-Ø35	2360 (1070)	9665 (4383)	5.41 (2.455)



Wheel 12.5" diameter

C_{STC}
TSO

Nose wheel for DHC-6 Twin Otter
CNC aeronautical high grade aluminum, 3 times more resistant than Magnesium
No corrosion
Sealed bearings (very low maintenance)

Wheel P/N	Dimension	Ø	Ball bearings	Static Load Lbs (Kg)	Limit load Lbs (Kg)	Wheel weight Lbs (Kg)
RA-008	8.90-12.5"	12.5"	Ø41.28-Ø41.28	2023 (917)	9103 (4128)	16.43 (7.45)



Webshop

Patents

History/ Values

Certified kits/STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Wheel Axles



Brake Controls
Rudd'Air Pedals

Regulators
Anti-skid

Parking Valves

[Contacts](#)
[Webshop](#)
[Amoite® Patents](#)
[History/ Values](#)
[Certified kits /STCs](#)
[Exp. Kits](#)
[SensAIR®](#)
[Landing Gears
ALG/B'Flex
Shock Wheel](#)
[Wheels/Brakes](#)
[Nose-Tailwheels](#)
[Tires](#)
[Wheel Axles](#)
[Brake Controls
Rudd'Air Pedals](#)
[Regulators
Anti-skid](#)
[Parking Valves](#)
[Hoses/Fittings](#)
[Spare Parts](#)
[Tools](#)
[FAQs](#)
[BERINGER Aero
Technology](#)
[They trust us](#)

Dimension of a tire



A : Tire external diameter (inches)
B : Tire width (inches)
C : Tire internal diameter (inches)

Conversion Lbs/kg

1 Lb <--> 0,45 kg
1 kg <--> 2,2 Lbs

Notes :

- We highly recommend the tire installation by BERINGER for all new wheels and tires bought at BERINGER. This service, charged in addition, includes a pressure test to ensure the conformity of the installation.
- We recommend the tire changing to be done by a BERINGER Service Center, with the specific BERINGER tool.
- Dimensions and weight can vary. BERINGER AERO is not liable for the load or speed rating variations.

The tire choice can lead to a different wheel size.
The following chart lists all the wheel sizes and their matching tire sizes.
Do not hesitate to contact us for more information.



→ [Youtube BERINGER AERO technical support](#)

[How to remove a tubeless tire](#) →



→ [How to mount a tubeless tire](#)

Tire P/N	Description	ø A Inch	Width B Inch	Static load Lbs	Weight Lbs Kg	Wheel correspondance
PAG05	tire and tube 200x50 6PLY TT	7.90	2.00	-	1.10 0.50	RA-004
PAG07	Tire 2.80/2.50-4" 4PLY Kenda TL	9.00	2.80	411	1.32 0.60	3.50-4
PAG02	Tire 3.00-4" 4PLY Veloce TL	10.30	3.50	-	1.32 0.60	3.50-4
S-390	Tire 9x3.50-4" 4PLY Cheng Shin	9.00	3.50	-	1.76 0.80	3.50-4
S-317	Tire 11x4.00-5 " 4PLY Deli TL	11.60	3.80	-	2.65 1.20	4.00-5

Tire P/N	Description	ø A Inch	Width B Inch	Static load Lbs	Weight Lbs Kg		Wheel correspondance
PAG01	Tire 4.00-4" 4PLY Kenda TL	11.90	3.90	-	2.20	1.00	3.50-4
PAG10	Tire 4.00-4" 4PLY Secura TL	11.90	3.90	-	3.09	1.4	3.50-4
505T08-1	Tire 5.00-5" 10PLY FE LT Goodyear TL	14.20	4.95	2150	6.80	3.08	5.00-5
070-310-0	Tire 5.00-5" 8PLY Michelin Air TL	14.20	4.70	1800	5.73	2.60	5.00-5
PAD01	Tire 4.00-6" 6PLY Mitas TT	14.50	4.40	-	2.87	1.30	4.00-6
PAD03	Tire 4.00-6" 6PLY Aero Classic TL	14.50	4.40	-	3.75	1.70	4.00-6
TK2077A	Tire 4.00-6" 6PLY MDO	13.80	4.10	570	4.20	1.90	4.00-6
TK107A	Tire 4.00-6" 8PLY AeroClassic	13.30	4.13	849	5.50	2.50	4.00-6
PAC03	Tire 13x5.00-6" 4PLY Deli TT	13.40	4.70	-	2.87	1.30	4.00-6
PAC04	Tire 13x5.00-6" 8PLY Mitas TL	13.40	4.70	-	3.30	1.50	4.00-6
PAC08	Tire 15x6.00-6" 10PLY Flight Custom II GoodYear TL	14.50	5.30	3200	9.70	4.40	4.00-6
PAC02	Tire 15x6.00-6" 6PLY Mitas TL	14.80	5.10	-	4.85	2.20	4.00-6
PAC10	Tire 15x6.00-6" 4PLY Kenda TL	14.80	5.10	-	5.69	2.58	3.50-4
PAC05	Tire 15x6.00-6" 6PLY Air Trac TT	15.00	5.30	1950	6.17	2.80	4.00-6
PAB01	Tire 380x150-5" 6PLY Michelin Air TT	15.00	5.50	1598	6.61	3.00	5.00-5
025-501-1	Tire 15x6.00-6" 6PLY Michelin Air TL	15.00	5.30	1950	7.27	3.30	4.00-6/6.00-6
PAB03	Tire 6.00-6" 6PLY AirTrac TT	17.50	6.30	1150	6.83	3.10	4.00-6/6.00-6
070-317-1	Tire 6.00-6" 8PLY Michelin Air TL	17.50	6.30	2350	9.26	4.20	4.00-6/6.00-6
606T86-3	Tire 6.00-6" 8PLY Flight Custom III GoodYear TL	17.50	6.30	2350	13.00	5.90	4.00-6/6.00-6
PAF03	Tire 21x8.00-6" 4PLY Aero Classic TL	20.50	7.10	800	10.80	4.90	6.00-6
076-325-0	Tire 8.50-6" 6PLY Michelin TL	21.00	7.50	2275	15.43	7.00	6.00-6
PAF05	Tire Bush 22x8.50-6" 4PLY Aero Classic TT	22.00	8.10	1600	8.82	4.00	6.00-6
HF237-1	Pneu Bush 21x12.00-8" 6PLY DURO	21.00	7.95	-	8.60	3.90	7.00-8

Contacts

Webshop

Aurore Patents

History/ Values

Certified kits/STCs

Exp. Kits

SensAIR®

Landing Gears
ALG/B'Flex
Shock Wheel

Wheels/Brakes

Nose-Tailwheels

Tires

Wheel Axles

Brake Controls
Rudd'Air PedalsRegulators
Anti-skid

Parking Valves

Hoses/Fittings

Spare Parts

Tools

FAQs

BERINGER Aero
Technology

They trust us