

FRL ***Catalog***

Arrow Pneumatics



Filters

Regulators

Lubricators

Accessories



Manufactured in the USA



A R R O W P N E U M A T I C S

Arrow Pneumatics manufactures a broad range of air preparation products. They include: particulate, oil removing, coalescing and absorbing filters; regulators; lubricators; sintered bronze exhaust mufflers, speed controls and in-line filters; aftercoolers, refrigerated and regenerative air dryers.

Technology expertise, patented design features, high quality standards and timely reaction to industry demands have established Arrow Pneumatics as a leader in the compressed air preparation field.

Arrow Pneumatics has a staff of qualified sales engineers to assist you with solutions to compressed air system needs and is committed to the future of compressed air technology.

TABLE OF CONTENTS

	PAGE NO.
COMPRESSED AIR SYSTEMS	2
FILTRATION SELECTION CHART	3
PARTICULATE FILTERS	
Introduction to Particulate Filters	4
Miniature Particulate Filters	5
Tri•Star Particulate Filters	6, 7
MidFlow Particulate Filters	8
High Flow Particulate Filters	9, 10, 11
COALESCING FILTERS	
Introduction to Coalescing Filters	12
Tri•Star Oil Removing Filters	13
MidFlow Oil Removing Filters	14
High Flow Oil Removing Filters	15, 16, 17
Miniature Coalescing Filters	18
Tri•Star Coalescing Filters	19
MidFlow Coalescing Filters	20,
High Flow Coalescing Filters	21, 22, 23
Tri•Star Adsorber Filters	24
MidFlow Adsorber Filters	25
High Flow Adsorber Filters	26, 27, 28
Two-in-One Coalescing Filters	29,30,31,32,33
REGULATORS	
Introduction to Regulators	34
Miniature Air Regulators	35, 36
Tri•Star Regulators	37
MidFlow Regulators	38
High Flow Regulators	39
INTEGRAL FILTER/REGULATORS	
Miniature Integral Filter/Regulators	40
Tri•Star Integral Filter/Regulators	41
LUBRICATORS	
Introduction to Lubricators	42
Miniature Fog Lubricators	43
Tri•Star Series 3 Arrowfog Lubricators	44
MidFlow Arrowfog Lubricators	45
Tri•Star Series 4 Ultrafog Lubricators	46
MidFlow Lubricators	47
Arrowick Lubricators	48
FILTER/REGULATOR/LUBRICATOR COMBINATIONS	
Miniature Filter/Regulator/Lubricator Combinations	49
Tri•Star Modular Filter/Regulator/Lubricator Combinations	50
Tri•Star Filter/Regulator/Lubricator Combinations	51, 52
Tri•Star Inserts & Accessories/Modular Components & Accessories	53
MidFlow & High Flow Filter/Regulator/Lubricator Combinations	54
IN LINE DESICCANT DRYER	
Introduction to In-Line Desiccant Dryer	55
In-Line Desiccant Dryer	56
Stage Air	57
ACCESSORIES	
Economatic Drains/Y-Strainer	58
Slide Valve / Mini In-Line Desiccant Dryer	59
T53 Automatic Drain	60
T54W Compact Zero Loss Drain	61
Miniature Relief Valves / Pressure Switch	62
Pressure Gauges / Regulator Accessories	63
Brackets	64

COMPRESSED AIR SYSTEMS

Compressed air powered equipment and machinery are critical elements in the productivity, efficiency and economy of today's industry, and quality air is the essential ingredient. High speed pneumatic production lines operate efficiently because of air dryers and filters that remove moisture and impurities from the air and regulators and lubricators which help eliminate downtime.

AIR DRYERS

Water in a compressed air system, if not removed, can damage production machinery, rust pipes, shorten component life, clog air lines and reduce air flow, resulting in costly downtime and defective product. Dryers remove water vapor from the air. Installing a dryer removes this water vapor before it condenses in the line or in downstream equipment.

FILTERS

Particulate filters remove harmful oil and water condensate, pipe scale, dirt and rust from your compressed air system. This prevents corrosive damage to compressed air equipment and finished products. Typically, particulate filters are installed upstream of regulators to prevent valve failure. They are also used as pre-filters to oil removing and coalescing filters to insure high efficiency and long element life in applications such as paint spraying, instrumentation and pharmaceuticals.

Certain pneumatic systems require air virtually free of oil and oil vapors. In these instances, oil removal may be achieved with the use of a coalescing filter.

REGULATORS

Pneumatic equipment that operates at higher than recommended pressure can cause excess torque, force and wear and can waste compressed air. Operating below specified pressure can cause machines to fail to meet their design performance specifications. Therefore, precise air pressure control is essential to efficient operation of air-powered equipment. An air line regulator is a specialized control valve which reduces upstream supply pressure level to a specified constant downstream pressure.

LUBRICATORS

Most pneumatic system components and most pneumatic tools require oil lubrication for proper operation and long service life. Too little oil can cause excessive wear and premature failure. Too much oil is wasteful and can become a contaminant, particularly when carried over with the air exhaust. Pneumatic equipment can be lubricated by the use of an air-line lubricator. Filtered and regulated air enters the lubricator and is mixed with oil in an aerosol mist. The lubricated air is then routed to the operating system.

FILTRATION SELECTION CHART

APPLICATION	FEATURES	SUGGESTED INSTALLATION AT POINT OF USE
General Industrial	General Purpose Liquid Removal and Particle Removal with Low Pressure Drop and Long Life	
	General Purpose Liquid Removal with Extra Fine Particle Retention	
	General Purpose Liquid Removal with Fine Particle Retention and Less Pressure Drop	
- General Industrial Use where Oil Exists in Supply - Air Cylinders, Valves, Motors - Pneumatic Machinery - General Paint Spraying	Oil Removal with Long Element Life and Sub Micron Particle Retention	
- Instrumentation - Blow Molding - Air Blowing on Finished Product - Bottling Industry - Paint Spraying (critical)	High Efficiency Oil and Water Removal and Sub Micron Particle Retention	
- Critical Instrumentation - Food/Dairy/Beverage - Clean Rooms - Pharmaceutical	High Efficiency Oil Removal, Sub Micron Particle Retention; and Oil Vapor and Odor Removal	
APPLICATION	FEATURES	SUGGESTED INSTALLATION WHEN USED WITH REFRIGERATED AIR DRYERS
- Any Industrial Location that Cannot Tolerate Moisture or Oil Residue in Compressed Air - Spray Painting - Pneumatic Machinery - Climate Control	- Pre-Filter Removes Bulk Liquid and Particulate Matter which may Clog or Harm Heat Exchanger - Oil Removal Filters Remove Oil Carryover not Removed by Dryer	
APPLICATION	FEATURES	SUGGESTED USE WHEN USED WITH REGENERATIVE DESICCANT DRYERS
- Outside Dryer Locations - Instrument Air with Extra Low Dewpoints - Micro Processor Industry - Replacement of Nitrogen	- Separator and Pre-Filter Remove Bulk Liquid and Oil Residue which Contaminates Desiccant - After Filter Removes Fine Desiccant Dust Carryover	

TECHNICAL DATA

ARROW FILTER SERIES	USAGE	SUFFIX		PARTICLE SIZE REMOVAL	D.O.P. EFFICIENCY	REMAINING OIL CONTENT BY WEIGHT (Intake of 50 ppm)	DRY PRESSURE DROP	MATERIAL
Series F3 Particulate	Bulk Liquid (Water, Oil) and Particle Removal	___3 5 Std	Extra Fine Fine General	3 μ ABSOLUTE 5 μ NOMINAL 40 μ NOMINAL			5 psig at Nominal Rated Flow for Std. Element	Cellulose Porous Bronze Porous Bronze
Series F4 Oil Removal Coalescing Style	Economical Liquid Oil and Oil Aerosol Removal	Std	General	.9 μ	95%	2.5 ppm	.5 to 2.5 psig	Borosilicate Micro Glass Fibers
Series F5 Coalescing Style	High Efficiency Removal of Water, Oil Aerosols; Plus Sub Micron Particle Retention	A	Extra High Efficiency	.01 μ	99.9999%	.0005 ppm	.5 to 2.5 psig	Borosilicate Micro Glass Fibers
		Std	High Efficiency	.03 μ	99.97%	.015 ppm		
Series F6 Adsorbing, Charcoal Impregnated Coalescing Style	Removal of Oil Vapors and Oil Associated Odors as well as Solid Particulate Contaminates. Requires F5A Pre-Filter	Std			90%	.0001 ppm	.5 to 2.5 psig	Borosilicate Micro Glass Fibers Impregnated with Activated Charcoal Particles



PARTICULATE FILTERS

F3

Arrow F3 series particulate filters remove harmful oil/water condensate, pipe scale, dirt and rust from your compressed air system. This prevents corrosive damage to compressed air equipment and finished products. Typically, particulate filters are installed upstream of regulators to prevent valve failure. They are also used as pre-filters to oil removing and coalescing filters to insure high efficiency and long element life in applications such as paint spraying, instrumentation and pharmaceuticals.

Each filter is equipped with a highly efficient baffling system for maximum bulk liquid and dirt particle removal. The Arrow heavy-duty, cleanable porous bronze element removes fine particles. Particle removal can be tailored to specific needs with either the 40 or 5 micron bronze element. An optional 3 micron absolute pleated fiber element is also offered for extra-fine particle removal.

The Arrow 3 micron absolute element is a high efficiency filter element with solid particulate removal in the 90% efficiency range down to .28 microns. The Beta efficiency rating is 99.5%. The element is constructed of pleated cloth fibers and rib supports for strength. Both ends have urethane 50 durometer elastomer seals to insure particulate entrapment. The pleated fiber design gives this element 10 times the surface area of similar nominal rated elements. This increased surface area provides a long element life and the same pressure drop characteristics as our current 40 micron element. When used as a pre-filter to a coalescing filter, it will increase the life of the coalescing element by 4 to 6 times.



LEGEND

-  – Air Containing Liquid and Particulate
-  – Clean Air
-  – Liquid and Particulate

IMPORTANT: Particulate filters only remove water in its liquid state. Water vapors will pass through a particulate filter and condense into liquid as the temperature in the air line drops. Liquid condensation may have a harmful effect on certain applications. We recommend installing an ARROW dryer for complete removal of liquid condensation from the system.

Miniature Particulate Filters



FEATURES

- 20 micron sintered bronze element
- High strength, recleanable
- 1 oz. polycarbonate bowl
- Manual 1/8" NPT twist drain

OPTIONS

add suffix to part number in alpha and numeric order

Overnight Drains

When a compressed air system is shut down, an overnight drain clears accumulated condensate from a filter bowl when the pressure falls to 3 psig or less.

- J** Overnight drain for polycarbonate bowlF300-01J
Push to manually drain.
- K** Overnight drain for metal bowlF300-01KM
Twist to manually drain.
- M** Metal bowlF300-01M
- Z** Piston drainF300-01Z
- 5** 5 micron elementF300-01-5

SPECIFICATIONS

WARNING! Polycarbonate plastic bowls could rupture if exposed to incompatible chemicals whether inside or outside the bowl. If such chemicals are present, use a metal bowl.

Polycarbonate Bowl

- Max. pressure 150 psig
- Operating temperature range 40°F to 125°F

Metal Bowl

- Black E coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Piston Drain

Note: Z option is differential drain which opens & ejects water only when a differential pressure is created at the start of air flow. The piston drain lifts up (approx. 1 second) & closes, it will not operate again until the flow stops, then starts back up again.

- Max. pressure 175 psig
- Operating temperature range 40°F to 160°F

Body black E coated zinc

Baffle plastic

Seals Buna N

Elements

- 20 micron sintered bronze
- 5 micron sintered bronze

KITS

Bowl Kits

- Polycarbonate BKF300
- Polycarbonate with overnight drain. BKF300J
- Metal BKF300M

Element Kits



- 20 micron 2-pack. EKF300
- 5 micron 2-pack. EKF300-5

Drain Kit

- Piston drain kit. PKF300

- Mounting Bracket. FBK3


PERFORMANCE CHARACTERISTICS FOR 20 MICRON ELEMENT

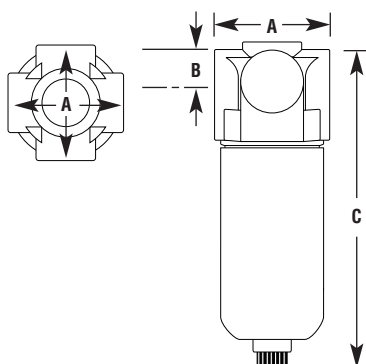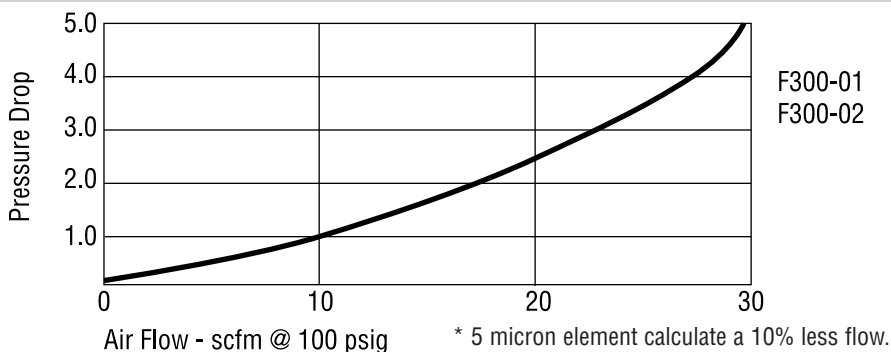

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1/8"	F300-01	27	1 oz.	1 1/2	1/2	4 5/8	.5
1/4"	F300-02	27	1 oz.	1 1/2	1/2	4 5/8	.5

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.



F3

Elements

- 40 micron sintered bronze standard
- 5 micron sintered bronze
- 3 micron absolute pleated fiber

KITS

- Internal float drain kit. 5200

Bowl Kits

- Polycarbonate with guard . . . BKF35
- Black coated metal. BKF45M
- Black coated metal with sight. BKF45W

Element Kits

- 40 micron 2-pack. EK35
- 5 micron 2-pack. EK35-5
- 3 micron absolute 2-pack . . EK35-3

Repair Kits

- Repair kit RKF35
- Replacement sight kit WK45

Mounting Kit see page 64

- Mounting kit FBK5

3 Micron Absolute

The new Arrow 3 micron absolute element is a high efficiency particulate removal element. Unlike nominal rated particulate elements, the 3 micron absolute is qualified to an efficiency rating of 99.5% **solid particulate removal** at 3 microns, and maintains 95% efficiency ratings to .3 microns.

PARTICLE SIZE	REMOVAL EFFICIENCY RATING*	
	5 MICRON NOMINAL	ARROW 3 MICRON ABSOLUTE
.3 μ	19.2%	95.0%
.5 μ	28.8%	97.6%
1.0 μ	35.1%	97.6%
3.0 μ	89.7%	99.5%

* Beta Filtration Rating $\beta_3 = 200$


Features:

- Element media is cellulosic and synthetic fibers with a resin binder. The pleated design has 10 times the surface area of sintered nominal rated elements and increases particle collection.
- End seals consist of 50 durometer Urethane to prevent solid particulate leakage past the element.
- Solid rib supports add extra strength and prevent element collapse under high differential pressure loads.
- Flow and pressure drop identical to 40 micron element.

Applications:

- Air gauging equipment
- Instrument air
- After filter for desiccant dryer

PERFORMANCE CHARACTERISTICS FOR 40 MICRON ELEMENT

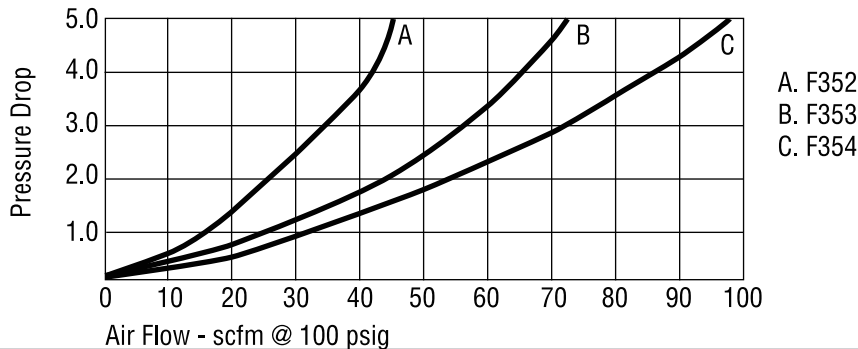

* 5 micron element reduces flow by 10%

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/4"	F352	48	5 oz.	2 3/4	3/4	6 1/4	2 1/2	1.2
3/8"	F353	75	5 oz.	2 3/4	3/4	6 1/4	2 1/2	1.2
1/2"	F354	100	5 oz.	2 3/4	3/4	6 1/4	2 1/2	1.2
1/4"	F352W	48	6 oz.	2 3/4	3/4	6 7/8	2 1/2	1.7
3/8"	F353W	75	6 oz.	2 3/4	3/4	6 7/8	2 1/2	1.7
1/2"	F354W	100	6 oz.	2 3/4	3/4	6 7/8	2 1/2	1.7

* Flow scfm based on 5.0 psi Δp @ 100 psig inlet.

MidFlow Particulate Filters



SPECIFICATIONS

Metal Bowl

- Zinc, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Zinc, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain

- Buna N float
- Note: limits bowl temperature and pressure rating
- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Body black E coated aluminum

Baffle plastic

Seals Buna N

Vane plastic

Elements

- 40 micron sintered bronze
- 5 micron sintered bronze
- 3 micron absolute pleated fiber

KITS

- Internal float drain kit 5200

Bowl Kits

- Metal with sight BKF47W
BKF48W
- Metal without sight BKF47M
BKF48M

Element Kits

- 40 micron EK37, EK38
- 5 micron EK37-5, EK38-5
- 3 micron absolute EK37-3, EK38-3

Repair Kits

- Repair kit RKF37
RKF38
- Replacement sight kit WK57

Mounting Kit see page 64

- Mounting kit FBK7

FEATURES

- 40 micron sintered bronze element offers depth filtration. High strength, recleanable
- 10 oz. or 20 oz. black coated metal bowl with liquid level sight
- Manual 1/8" NPT twist drain
- High Flow, low pressure drop

OPTIONS

add suffix to part number in alpha and numeric order

Float Drain

An internal float rises as condensate accumulates in a filter bowl to activate the drain.

F Internal float drain F374FW

Overnight Drains

An overnight drain operates when a compressed air system is shut down. It clears accumulated condensate from a filter bowl when pressure falls to 3 psig or less.


K Overnight drain F374KW
Twist to manually drain.

M Metal bowl without sight glass. F374M


5 5 micron element F374W5

3 3 micron absolute element. . F374W3

PERFORMANCE CHARACTERISTICS FOR 40 MICRON ELEMENT

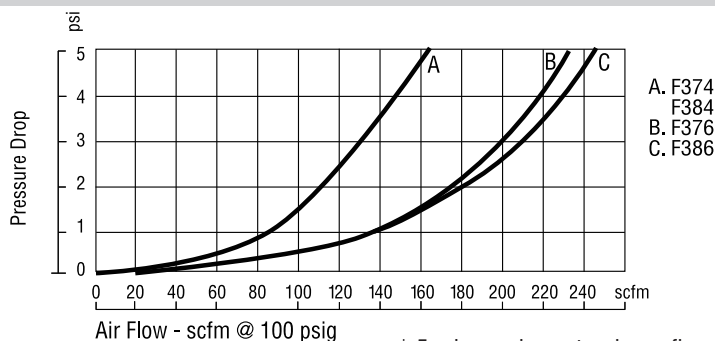

* 5 micron element reduces flow by 10%.

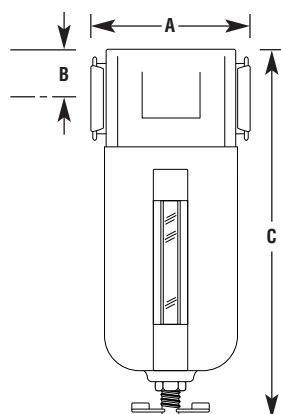

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1/2"	F374W	160	10 oz.	3 3/4	1 3/32	7 5/8	2.7
1/2"	F384W	165	20 oz.	3 3/4	1 3/32	10 7/8	3.8
3/4"	F376W	230	10 oz.	3 3/4	1 3/32	7 5/8	2.7
3/4"	F386W	245	20 oz.	3 3/4	1 3/32	10 7/8	3.8

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.

High Flow Particulate Filters



FEATURES

- 40 micron sintered bronze element offers depth filtration. High strength, recleanable.
- Metal bowl is standard with liquid level sight
- Manual 1/8" NPT twist drain

OPTIONS

add suffix to part number in alpha and numeric order

D Differential pressure gauge . F329-10DW Float Drain

An internal float rises as condensate accumulates in a filter bowl to activate the drain.

F Internal float drain F329-08FW Overnight Drains

An overnight drain operates when a compressed air system is shut down. It clears accumulated condensate from a filter bowl when pressure falls to 3 psig or less.

K Overnight drain for metal bowl F329-08KW Twist to manually drain

5 5 micron element F329-08W5

3 3 micron absolute element. . F329-08W3

For Metal Bowl without sight delete W

SPECIFICATIONS

Metal Bowl

- Steel, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Steel, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain

- Buna N float
- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Body black E coated aluminum

Baffle plastic

Seals Buna N

Vane aluminum

Elements

- 40 micron sintered bronze
- 5 micron sintered bronze
- 3 micron absolute pleated fiber

KITS

- Internal float drain 5200

Bowl Kits

- Metal with sight BKF329W
- Metal without sight BKF329M



Element Kits

- 40 micron EKF329
- 5 micron. EKF329-5
- 3 micron absolute. EKF329-3

Repair Kits

- Repair kit RKF329
- Replacement sight kit WK35

PERFORMANCE CHARACTERISTICS

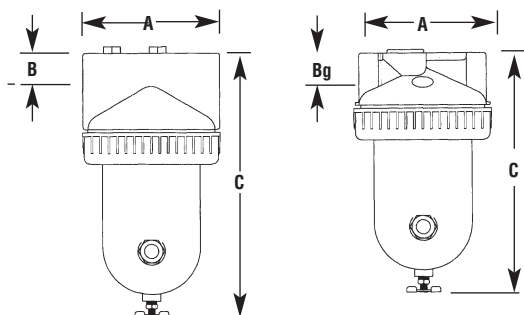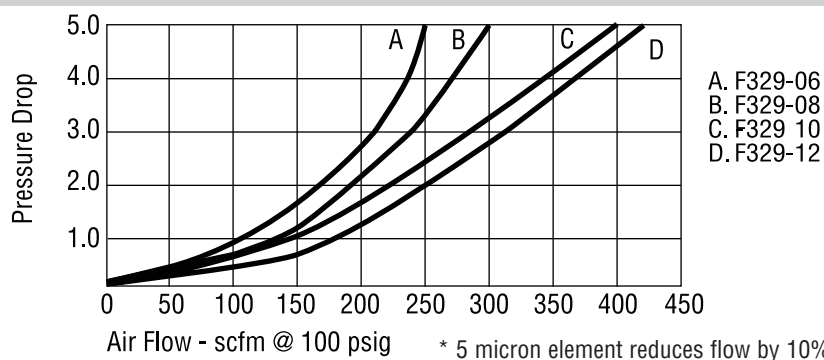

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3/4"	F329-06W	260	29 oz.	5 ⁵ / ₃₂	1 ³ / ₁₆	9 ¹³ / ₃₂	3.7
1"	F329-08W	300	29 oz.	5 ⁵ / ₃₂	1 ⁵ / ₁₆	9 ¹³ / ₃₂	3.7
1 1/4"	F329-10W	400	29 oz.	5 1/4	1 1/2	10 ¹¹ / ₃₂	6.3
1 1/2"	F329-12W	425	29 oz.	5 1/4	1 1/2	10 ¹¹ / ₃₂	6.3

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.

High Flow Particulate Filters



FEATURES

- 40 micron pleated fiber element offers depth filtration. High strength, recleanable.
- Metal bowl is standard
- 1/8" NPT twist drain

OPTIONS

add suffix to part number in alpha and numeric order

D Differential pressure gauge . F358HF-08D
Float Drain

An internal float rises as condensate accumulates in a filter bowl to activate the drain.

F Internal float drain F358HF-08F

Overnight Drains

An overnight drain operates when a compressed air system is shut down. It clears accumulated condensate from a filter bowl when pressure falls to 3 psig or less.

K Overnight drain F358HF-08K
Twist to manually drain.

W Metal bowl with sight glass F358HF-08W

-3 3 micron absolute element F358HF-08-3

SPECIFICATIONS

Metal Bowl

- Steel, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Steel, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain

- Buna N float
- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Body black E coated aluminum

Baffle plastic

Seals Buna N

Vane aluminum

Elements

- 40 micron pleated fiber
- 5 micron pleated fiber
- 3 micron absolute pleated fiber

KITS

- Internal float drain 5200

Bowl Kits

- Metal with sight BKF364W
- Metal without sight BKF364


Element Kits

- 40 micron EKF358
- 3 micron EKF358-3

Repair Kits

- Repair kit RKF508
- Replacement sight kit WK35

PERFORMANCE CHARACTERISTICS FOR 40 MICRON ELEMENT

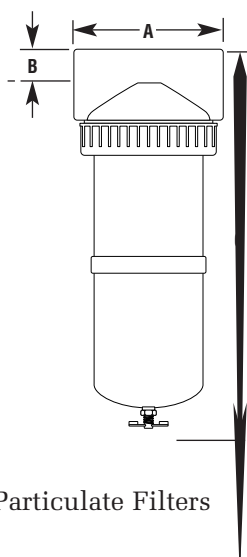

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1"	F358HF-08	50 oz.	460	5 1/4	1 1/2	14 1/2	11
1 1/4"	F358HF-10	50 oz.	500	5 1/4	1 1/2	14 1/2	9
1 1/2"	F358HF-12	50 oz.	550	5 1/4	1 1/2	14 1/2	7.8

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.

High Flow Particulate Filters



FEATURES

- 40 micron standard element offers depth filtration for 1½" and 2". High strength, recleanable.
- Metal bowl is standard
- 1/4" NPT twist drain

OPTIONS

add suffix to part number in alpha and numeric order

- D** Differential pressure gauge . F3N1-12D
- T** External Float Drain F3N1-12T
- W** Metal bowl with sight glass F3N1-12W
- 3** 3 micron absolute element F3N1-12-3

SPECIFICATIONS

Metal Bowl

- Black coated aluminum
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Black coated aluminum
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Body black coated aluminum

Baffle plastic

Seals Buna N

KITS

- Float for External Drain 5200

Bowl Kits

- Metal with sight BKF510W
- Metal without sight BKF510
- Metal with sight BKF518W
- Metal without sight BKF518



Element Kits

- 40 micron EKF3N1
- 3 micron EKF3N1-3
- 40 micron EKF3NHF
- 3 micron EKF3NHF-3

Repair Kits

- Repair kit RKF3N1
- RKF519
- Replacement sight kit BSF510

PERFORMANCE CHARACTERISTICS FOR 40 MICRON ELEMENT

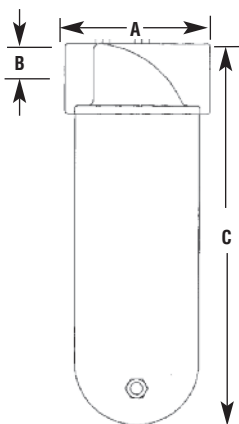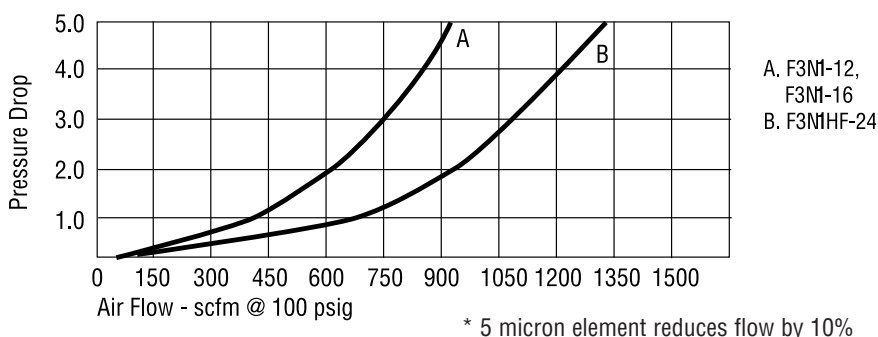

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1½"	F3N1-12	100 oz.	910	6½	2	17¾	13
2"	F3N1-16	100 oz.	910	6½	2	17¾	13
3"	F3NHF-24	200 oz.	1300	7⅝	2¼	27½	18

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.

A coalescing filter is a way of separating oil from compressed air. It is defined as a filter that removes a continuous stream of aerosols from a gas stream. In the filter, the oil is collected as a droplet on the media which is then periodically drained away. The performance and efficiency of filters should be preceded by an F3 particulate filter.

F4 oil removing filters offer good industrial filtration with low pressure drop and long element life. They are often used with older compressors where downstream oil carryover is excessive and when longer element life and low pressure drop are a concern.

F5 coalescing filters are used for high filtration of oil aerosols and sub micron particles. They are often used with critical instrumentation; paint spraying equipment; more sophisticated air systems; blow molding bottling; in the food industry, and where air blows on a finished product. The .01 micron grade "A" element is offered for the most critical filtration applications, such as those found in clean rooms.

F6 adsorber filters were engineered specifically for critical applications that will not tolerate the presence of oil vapors. If the compressed air has been prepared by a suitable refrigerated dryer and F5 oil removing filter, the F6 Adsorber will insure oil concentrations of .01 PPM by weight. In all cases, an F5A coalescing filter must precede an F6 Adsorber filter. To prevent any particle migration downstream, an F3 with 3 micron element should be installed downstream for total system protection.



and move downstream.



Tri•Star Oil Removing Filters

F4

FEATURES

- .9 micron element
- Low pressure drop
- Long element life
- Pop-up indicator indicates abnormal condition such as plugged element or excessive flow. Critical protection requires changing element at regular intervals.
- 6 oz. black coated metal bowl with liquid level sight
- Manual 1/8" NPT twist drain
- In-line or modular installation

OPTIONS

add suffix to part number in alpha order

Float Drain

F Internal float drain F452FW

Overnight Drains

An overnight drain operates when a compressed air system is shut down. It clears accumulated condensate from a filter bowl when pressure falls to 3 psig or less.

K Overnight drain F452KW
Twist to manually drain.

For Metal Bowl without sight delete W

SPECIFICATIONS

Metal Bowl

- Zinc, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Zinc, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain Note: limits bowl temperature and pressure rating.

- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Element

- .9 micron borosilicate glass fiber
- D.O.P. Efficiency: 95%, Particle size removal, Remaining oil content by wt.: 2.5 PPM

Body black E coated aluminum

Baffle plastic

Seals Buna N

KITS

- Internal float drain 5200

Bowl Kits

- Metal bowl without sight BKF45M
- Metal bowl with sight. BKF45W

Element Kit

- .9 micron 2-pack EK45


Repair Kits

- Repair kit RKF45
- Replacement sight kit WK45
- Indicator pop-up kit DPK-05


Mounting Kit see page 64

- Mounting kit FBK5

PERFORMANCE CHARACTERISTICS

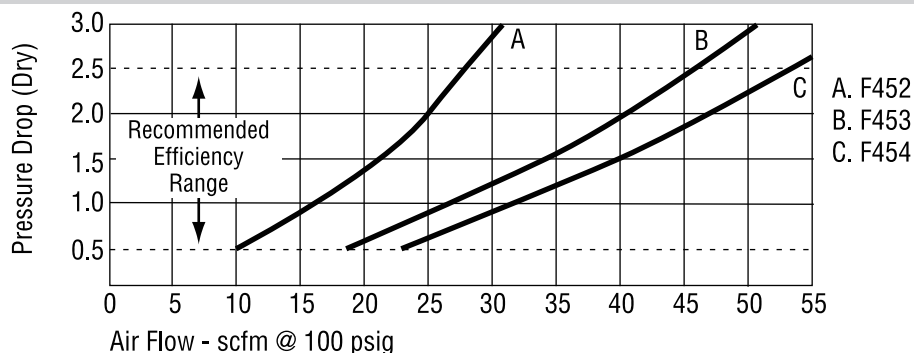

DIMENSIONS

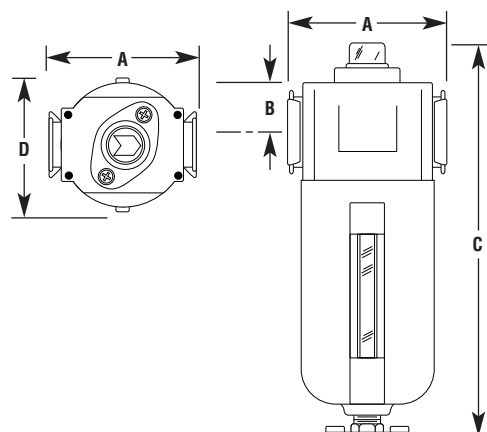

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/4"	F452W	27	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7
3/8"	F453W	45	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7
1/2"	F454W	53	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

MidFlow Oil Removing Filters



FEATURES

- .9 micron element
- Low pressure drop
- Long element life
- Pop-up indicator indicates abnormal condition such as plugged element or excessive flow. Critical protection requires changing element at regular intervals.
- 10 oz. or 20 oz. black coated metal bowl with liquid level sight
- Manual 1/8" NPT twist drain

OPTIONS

add suffix to part number in alpha order

Float Drain

F Internal float drain F474FW

Overnight Drains

An overnight drain operates when a compressed air system is shut down. It clears accumulated condensate from a filter bowl when pressure falls to 3 psig or less.

K Overnight drain F474KW
Twist to manually drain.

M Metal bowl
without sight glass F474M

SPECIFICATIONS

Metal Bowl

- Zinc, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Zinc, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain

Note: limits bowl temperature and pressure rating.

- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Body black E coated aluminum

Baffle plastic

Seals Buna N

Elements

- .9 micron borosilicate glass filter
D.O.P. Efficiency: 95%, Particle size removal, Remaining oil content by wt.: 2.5 PPM

KITS

- Internal float drain 5200

Bowl Kits

- 10 oz. with sight. BKF47W
- 10 oz. without sight BKF47M
- 20 oz. with sight BKF48W
- 20 oz. without sight BKF48M

Element Kits

- .9 micron EK47
EK48



Repair Kits

- Repair kit RKF47
RKF48
- Replacement sight kit WK57
- Indicator pop-up kit DPK-05

Mounting Kit see page 64

- Mounting kit FBK7

PERFORMANCE CHARACTERISTICS

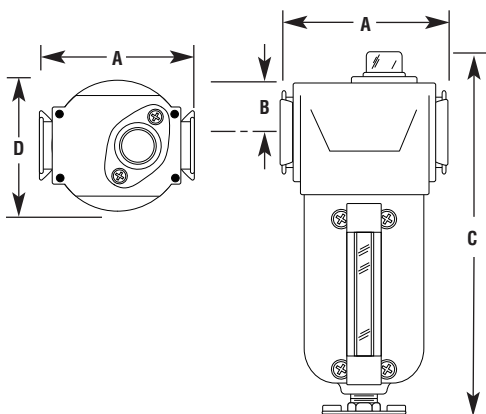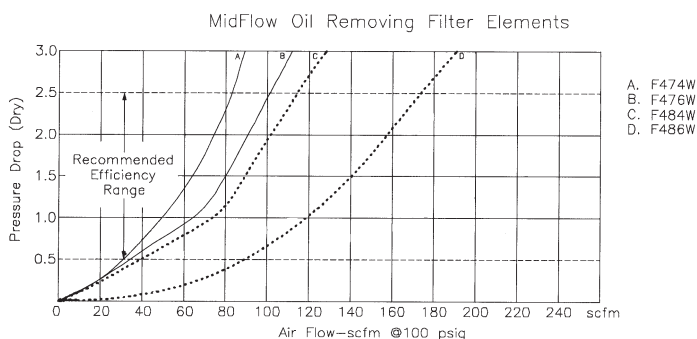

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/2"	F474W	83	10 oz.	3 3/4	1 1/8	8 1/4	3	2.7
1/2"	F484W	116	20 oz.	3 3/4	1 1/8	11 1/2	3	3.6
3/4"	F476W	98	10 oz.	3 3/4	1 1/8	8 1/4	3	2.7
3/4"	F486W	172	20 oz.	3 3/4	1 1/8	11 1/2	3	3.6

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

High Flow Oil Removing Filters



FEATURES

- .9 micron element
- Manual 1/8" NPT twist drain
- Low pressure drop
- Long element life

OPTIONS

add suffix to part number in alpha and numeric order

D Differential pressure gauge . F408-10D

Float Drain

An internal float rises as condensate accumulates in a filter bowl to activate the drain.

F Internal float drain F405-06FW
F408-08FW

Overnight Drains

An overnight drain operates when a compressed air system is shut down. It clears accumulated condensate from a filter bowl when pressure falls to 3 psig or less.

K Overnight drain F408-08KW
Twist to manually drain.

For Metal Bowl without sight delete W

SPECIFICATIONS

Metal Bowl

- Steel, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Steel, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain

- Buna N float
- Note: limits bowl temperature and pressure rating
- Operating pressure range 30 to 175 psig
 - Operating temperature range 40°F to 120°F

Body black E coated aluminum

Baffle aluminum

Seals Buna N

Elements

- .9 micron borosilicate glass fiber
- D.O.P. Efficiency: 95%, Particle size removal, Remaining oil content by wt.: 2.5 PPM

KITS

- Internal float drain kit 5200

Bowl Kits

- Metal with sight F405 BKF329W
- Metal without sight F405 BKF329M
- Metal with sight F408 BKF364W
- Metal without sight F408 BKF364



Element Kits

- .9 micron F405 EKF405
- .9 micron F408 EKF408

Repair Kits

- Repair kit RKF505
- Repair kit RKF508
- Replacement sight kit 405 . . . WK35
- Replacement sight kit 408 . . . WK35
- Overnight drain kit CKFK
- Sight glass kit DPK-05

PERFORMANCE CHARACTERISTICS

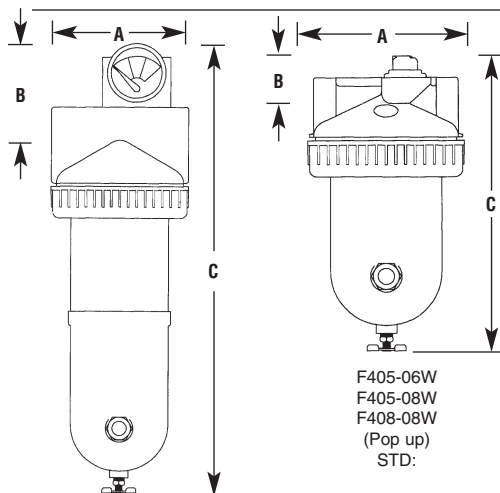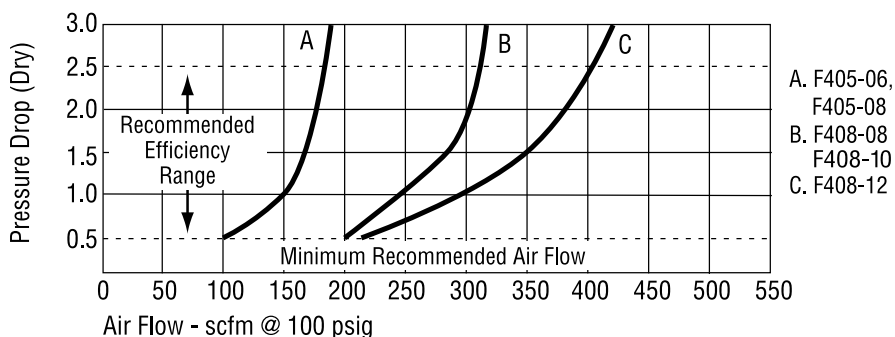


F408-10DW, F408-12DW
Optional $\varnothing$ P Gauge

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3/4"	F405-06W	29 oz.	185	4 7/8	1 3/16	9 13/32	3.7
1"	F405-08W	29 oz.	185	4 7/8	1 3/16	9 13/32	3.7
1"	F408-08W	60 oz.	300	4 7/8	1 3/16	14 13/32	6.0
1 1/4"	F408-10W	60 oz.	300	5 5/32	3 3/4	16 3/4	6.3
1 1/2"	F408-12W	60 oz.	400	5 5/32	3 3/4	16 3/4	6.3

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

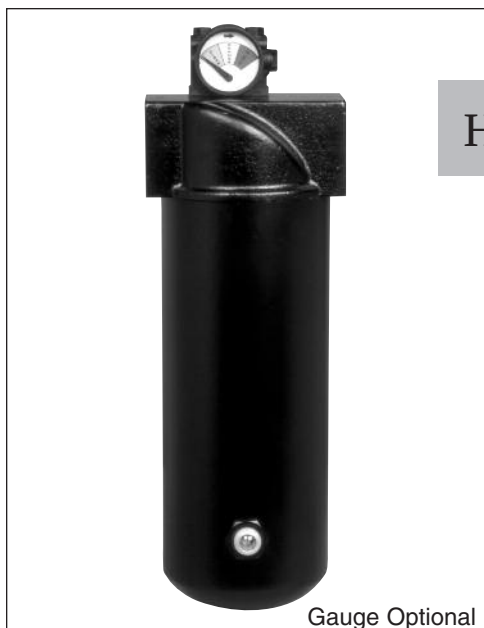

Gauge Optional

High Flow Oil Removing Filters

F4

SPECIFICATIONS

Metal Bowl

- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Black E coated Aluminum
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Body black E coated aluminum

Baffle plastic

Seals Buna N

Element

- .9 micron borosilicate glass filter
- D.O.P. Efficiency: 95%, Particle size removal, Remaining oil content by wt.: 2.5 PPM

KITS

- Float for External Drain 5200
- Drain Trap Kit DKTF2

Bowl Kits

- Metal without sight F410 BKF510
- Metal with sight F410 BKF510W
- Metal without sight F418 BKF518
- Metal with sight F418 BKF518W
- Metal without sight F428 BKF528
- Metal with sight F428 BKF528W

Element Kit

- .9 micron EKF410, EKF418, EKF428

Repair Kits

- Repair kit RKF511
- Replacement sight kit BSF510

FEATURES

- .9 micron element
- Low pressure drop
- Long element life
- Manual 1/4" twist drain

OPTIONS



add suffix to part number in alpha order

D Differential pressure gauge . F410-08**D**

T External Float Drain F410-08**T**

W Metal bowl with sight glass F410-08**W**

PERFORMANCE CHARACTERISTICS

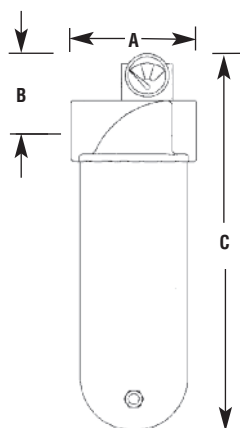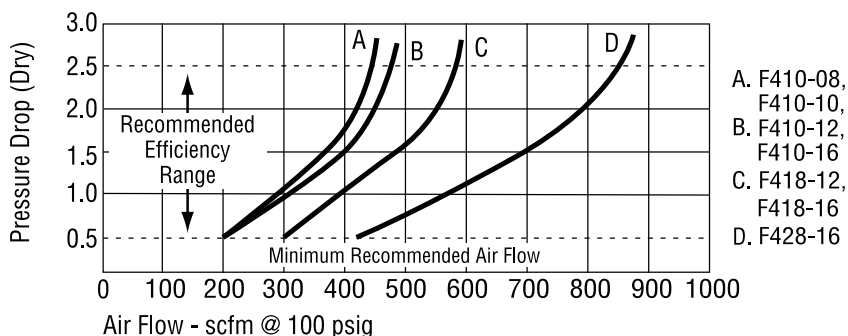

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1"	F410-08	100 oz.	420	6½	2	21	16
1¼"	F410-10	100 oz.	420	6½	2	21	16
1½"	F410-12	100 oz.	475	6½	2	21	16
1½"	F418-12	200 oz.	590	6½	2	28¾	19
2"	F410-16	100 oz.	475	6½	2	21	16
2"	F418-16	200 oz.	590	6½	2	28¾	19
2"	F428-16	300 oz.	840	6½	2	39	23

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

High Flow Oil Removing Filters



Gauge Optional

FEATURES

- .9 micron element
- Low pressure drop
- Long element life
- Manual 1/4" twist drain

OPTIONS

add suffix to part number in alpha order

- D** Differential pressure gauge . F411-24D
T External Float Drain F411-24T
W Metal bowl
 with sight glass F411-24W

SPECIFICATIONS

Metal Bowl

- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Black coated aluminum
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Body black coated aluminum

Baffle plastic

Seals Buna N

Vane plastic

Element

- .9 micron borosilicate glass filter
- D.O.P. Efficiency: 95%, Particle size removal, remaining oil content by wt.: 2.5 PPM

KITS

- Float for External Drain 5200
- Drain Trap Kit DKTF2

Bowl Kits

- Metal without sight F411 BKF510
- Metal with sight F411 BKF510W
- Metal without sight F419 BKF518
- Metal with sight F419 BKF518W
- Metal without sight F429 BKF528
- Metal with sight F429 BKF528W



Element Kit

- .9 micron EKF411, EKF419, EKF429

Repair Kits

- Repair kit RKF511, RKF519, RKF529
- Replacement sight kit BSF510

PERFORMANCE CHARACTERISTICS

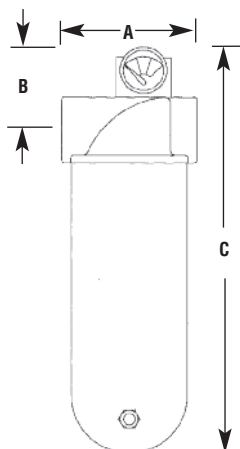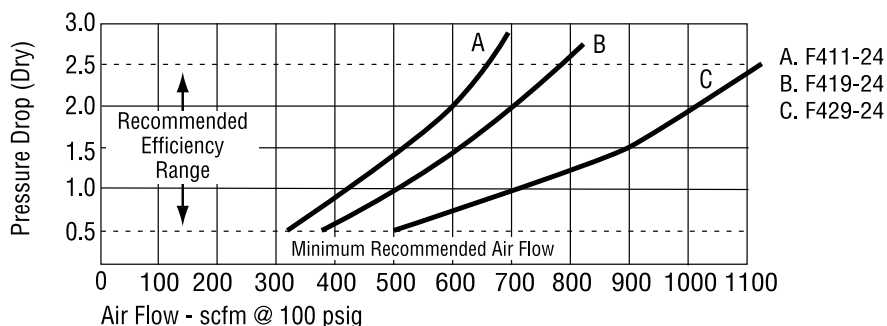

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3"	F411-24	100 oz.	620	7 ⁵ / ₈	2 ¹ / ₄	22 ¹¹ / ₁₆	21
3"	F419-24	200 oz.	770	7 ⁵ / ₈	2 ¹ / ₄	31 ³ / ₁₆	24
3"	F429-24	300 oz.	1100	7 ⁵ / ₈	2 ¹ / ₄	41 ⁷ / ₁₆	28

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.



Miniature Coalescing Filters

SPECIFICATIONS

Polycarbonate Bowl

- Max. pressure 150 psig
- Operating temperature range 40°F to 125°F

Metal Bowl

- Black E coated Aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Piston Drain

Note: Z option is differential drain which opens & ejects water only when a differential pressure is created at the start of air flow. The piston drain lifts up (approx. 1 second) & closes, it will not operate again until the flow stops, then starts back up again.

- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Body

- Black E coated aluminum

n y

FEATURES

- .03 micron fiber element
- 1 oz. polycarbonate bowl
- Manual 1/8" NPT twist drain

OPTIONS

add suffix to part number in alpha order

A .01 micron element F500-02**A**

Overnight Drains


When a compressed air system is shut down, an overnight drain clears accumulated condensate from a filter bowl when the pressure falls to 3 psig or less.

J Overnight drain for polycarbonate bowl F500-02**J**
Push to manually drain.

K Overnight drain for metal bowl F500-02**KM**
Twist to manually drain.

M Metal bowl F500-02**M**

Z Piston drain F500-02**Z**





Tri•Star Coalescing Filters

F5

FEATURES

- .03 micron fiber element
- Pop-up indicator indicates abnormal condition such as plugged element or excessive flow. Critical protection requires changing element at regular intervals.
- Low pressure drop
- 6 oz. black coated metal bowl with liquid level sight
- Black coated aluminum housing
- Manual 1/8" NPT twist drain
- In line or modular installation

OPTIONS

add suffix to part number in alpha order

A .01 micron element F552AW

Float Drain

F Internal float drain F552FW

Overnight Drains

When a compressed air system is shut down, an overnight drain clears accumulated condensate from a filter bowl when the pressure falls to 3 psig or less.

K Overnight drain for metal bowl F552KW
Twist to manually drain.

For Metal Bowl without sight delete W

SPECIFICATIONS

Body Black E coated aluminum

Baffle plastic

Seals Buna N

Metal Bowl

- Zinc, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight nickel plated zinc

- Zinc, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain

plastic, metal, brass, Buna N seal
Note: limits bowl temperature and pressure rating

- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Elements

- .03 micron borosilicate glass fiber
D.O.P. Efficiency: 99.97%, Particle size

removal, Remaining oil content by wt.:
.015 PPM

- .01 micron borosilicate glass fiber
D.O.P. Efficiency: 99.999%, Particle size removal, Remaining oil content by wt.:
.0005 PPM

KITS

- Internal float drain kit. 5200

Bowl Kits

- Metal without sight BKF45M
- Metal with sight BKF45W

Element Kits

- .03 micron 2-pack EK55
- .01 micron 2-pack EK55A


Repair Kits

- Repair kit RKF45
- Replacement sight kit WK45
- Indicator Pop-up kit DPK-05

Mounting Kit see page 64

- Mounting kit FBK5


PERFORMANCE CHARACTERISTICS

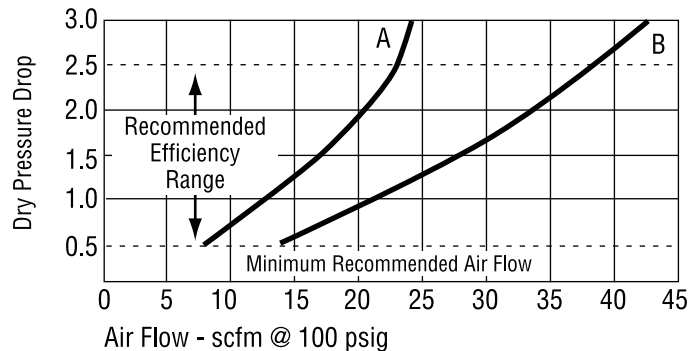

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/4"	F552W	24	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7
3/8"	F553W	37	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7
1/2"	F554W	37	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.



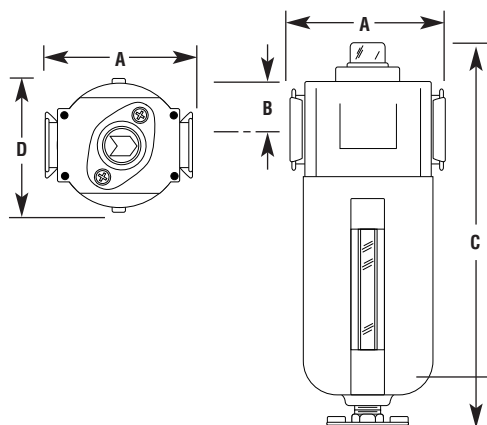




MidFlow Coalescing Filters

FEATURES

- .03 micron fiber element
- Pop-up indicator indicates abnormal condition such as plugged element or excessive flow. Critical protection requires

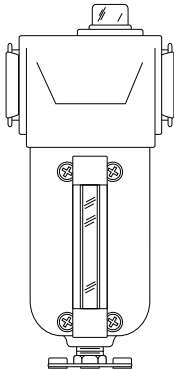

High Flow Coalescing Filters



FEATURES

- .03 micron fiber element
- Manual 1/8" NPT twist drain
- Low pressure drop

OPTIONS

add suffix to part number in alpha and numeric order

- A** .01 micron element F505-06A
- D** Differential pressure gauge . F508-10D

Float Drain

- F** Internal float drain F505-06FW

Overnight Drains

When a compressed air system is shut down, an overnight drain clears accumulated condensate from a filter bowl when the pressure falls to 3 psig or less.

- K** Overnight drain for metal bowl F508-08KW
- Twist to manually drain.*

For Metal Bowl without sight delete W

SPECIFICATIONS

Metal Bowl

- Zinc, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Zinc, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain

- Buna N float

Note: limits bowl temperature and pressure rating

- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Body black E coated aluminum

Baffle aluminum

Seals Buna N

Elements

- .03 micron borosilicate glass filter
D.O.P. Efficiency: 99.97%, Particle size removal, Remaining oil content by wt.: .015 PPM
- .01 micron borosilicate glass filter
D.O.P. Efficiency: 99.999%, Particle size removal, Remaining oil content by wt.: .0005 PPM

KITS

- Internal float drain kit 5200
- Overnight Drain Kit (K) CKFK
- Pop-up indicator kit DPK-05

Bowl Kits

- Metal with sight F505 BKF329W
- Metal without sight F505 BKF329M
- Metal with sight F508 BKF364W
- Metal without sight F508 BKF364M


Element Kits

- .03 micron 505 EKF505
- .01 micron 505 EKF505A
- .03 micron 508 EKF508
- .01 micron 508 EKF508A

Repair Kits

- Repair kit 505 RKF505
- Repair kit 508 RKF508
- Replacement sight kit WK35


PERFORMANCE CHARACTERISTICS

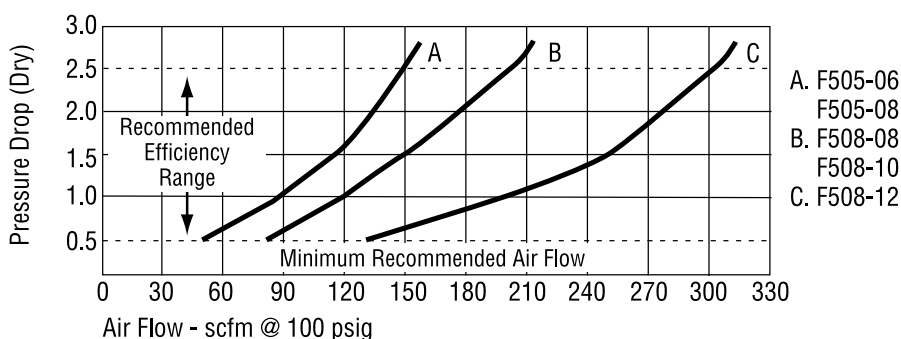

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3/4"	F505-06W	29 oz.	150	4 7/8	1 3/16	9 13/32	3.7
1"	F505-08W	29 oz.	150	4 7/8	1 3/16	9 13/32	3.7
1"	F508-08W	60 oz.	200	4 7/8	1 3/16	14 13/32	6.0
1 1/4"	F508-10W	60 oz.	200	5 5/32	3 3/4	16 3/4	6.3
1 1/2"	F508-12W	60 oz.	310	5 5/32	3 3/4	16 3/4	6.3

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

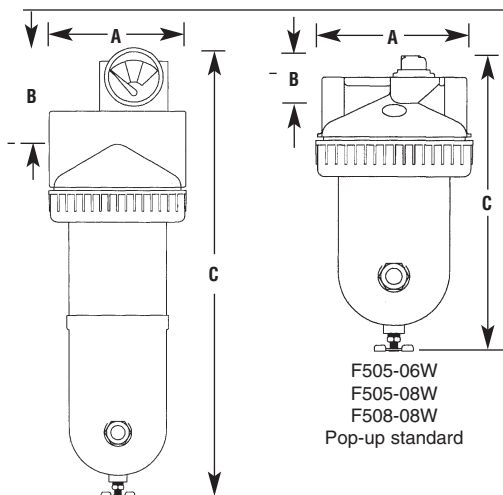



High Flow Coalescing Filters

F5

FEATURES

- .03 micron fiber element
- Low pressure drop
- Manual 1/4" NPT twist drain

OPTIONS

add suffix to part number in alpha order

- A** .01 micron element F510-08A
D Differential pressure gauge . . F510-08D
T External Float Drain F510-08T
W Metal bowl
 with sight glass F510-08W

SPECIFICATIONS

Metal Bowl

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Body Black coated aluminum

Baffle plastic

Seals Buna N

Elements

- .03 micron borosilicate glass fiber
D.O.P. Efficiency: 99.97%, Particle size removal, Remaining oil content by wt.: .015 PPM
- .01 micron borosilicate glass fiber
D.O.P. Efficiency: 99.999%, Particle size removal, Remaining oil content by wt.: .0005 PPM

KITS

- Float for External Drain 5200
- Drain Trap Kit DKTF2

Bowl Kits

- Metal with sight BKF510W
- Metal without sight BKF510
- Metal with sight BKF518W
- Metal without sight BKF518
- Metal with sight BKF528W
- Metal without sight BKF528



Element Kits

- .03 micron EKF510, EKF518, EKF528
- .01 micron EKF510A, EKF518A, EKF528A

Repair Kits

- Repair kit RKF511, RKF519, RKF529
- Replacement sight kit BSF510

PERFORMANCE CHARACTERISTICS

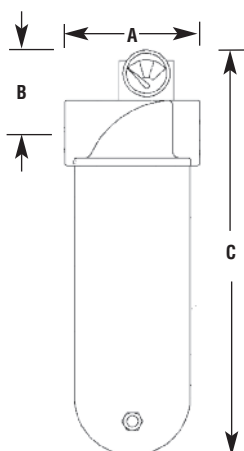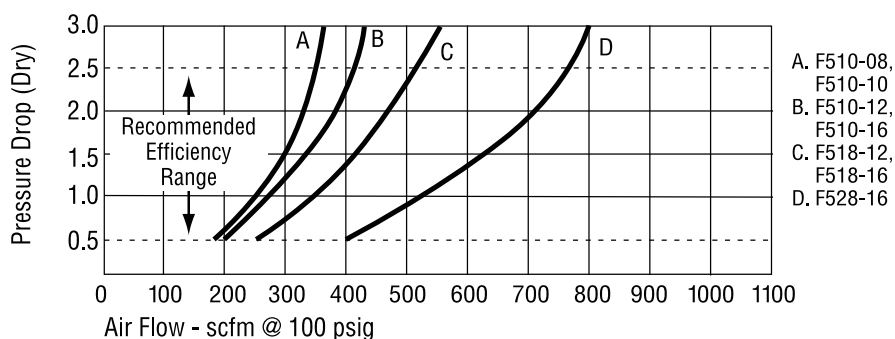

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1"	F510-08	100 oz.	310	6½	2	21	16
1¼"	F510-10	100 oz.	310	6½	2	21	16
1½"	F510-12	100 oz.	415	6½	2	21	16
1½"	F518-12	200 oz.	515	6½	2	28¾	19
2"	F510-16	100 oz.	415	6½	2	21	16
2"	F518-16	200 oz.	515	6½	2	28¾	19
2"	F528-16	300 oz.	765	6½	2	39	23

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.



Gauge Optional

High Flow Coalescing Filters

F5

FEATURES

- .03 micron fiber element
- Low pressure drop
- Manual 1/4" NPT twist drain

OPTIONS

add suffix to part number in alpha order

- A** .01 micron element F511-24A
D Differential pressure gauge . . F511-24D
T External Float Drain F511-24T
W Metal bowl
 with sight glass F511-24W

SPECIFICATIONS

Metal Bowl

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Body Black coated aluminum

Baffle plastic

Seals Buna N

Elements

- .03 micron borosilicate glass fiber
 D.O.P. Efficiency: 99.97%, Particle size removal, Remaining oil content by wt.: .015 PPM
- .01 micron borosilicate glass fiber
 D.O.P. Efficiency: 99.999%, Particle size removal, Remaining oil content by wt.: .0005 PPM

KITS

- Float for External Drain 5200
- Drain Trap Kit DKTF2

Bowl Kits

- Metal with sight BKF510W
- Metal without sight BKF510
- Metal with sight BKF518W
- Metal without sight BKF518
- Metal with sight BKF529W
- Metal without sight BKF529



Element Kits

- .03 micron EKF511
 Clear net no color EKF519
 EKF529
- .01 micron EKF511A
 EKF519A
 EKF529A

Repair Kits

- Repair kit RKF511
 RKF519
 RKF529
- Replacement sight kit BSF510

PERFORMANCE CHARACTERISTICS

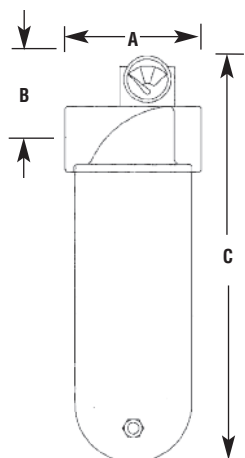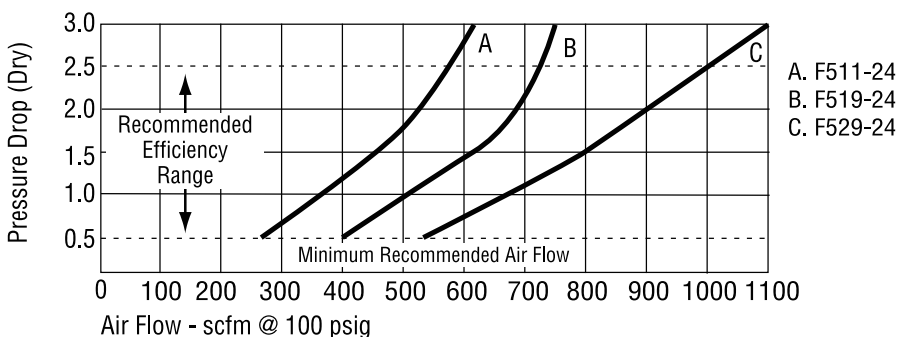

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C**	
3"	F511-24	100 oz.	620	7 ⁵ / ₈	2 ¹ / ₄	22 ¹¹ / ₁₆	21
3"	F519-24	200 oz.	770	7 ⁵ / ₈	2 ¹ / ₄	31 ³ / ₁₆	24
3"	F529-24	300 oz.	1100	7 ⁵ / ₈	2 ¹ / ₄	41 ⁷ / ₁₆	28

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

** Add 3/4" to height (c) if ordered with gauge



Tri•Star Adsorber Filters

F6

FEATURES

- Protects end processes from gaseous oil contamination and rids compressed air of offensive oily odors
- Removes hydrocarbons for use in analytical instruments
- Low pressure drop
- Pop-up indicator indicates abnormal condition such as plugged element or excessive flow. Critical protection requires changing element at regular intervals.
- 6 oz. black coated metal bowl with liquid level sight
- Black coated aluminum housing
- Manual 1/8" NPT twist drain
- In-line or modular installation

OPTIONS

For Metal Bowl without sight delete W

SPECIFICATIONS

Metal Bowl

- Zinc, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Zinc black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Element

- Multi-wrapped layers of impregnated activated charcoal particles to increase purification qualities. If the compressed air has been prepared by a suitable refrigerated dryer and F5A Coalescer filter, the F6 Absorber will insure oil concentrations of .0015 PPM by weight. In all cases, an F5 Coalescer must precede an F6 Absorber. To prevent any particle migration downstream an F3 with 3 micron element should be installed downstream for total system protection.

Body Black E coated aluminum

Baffle plastic

Seals Buna N

Bowl Kits

- Metal bowl without sight BKF45M
- Metal bowl with sight. BKF45W

Element Kits

- Charcoal wrapped 2-pack . . . EK65
- Clear net no color

Repair Kits

- Repair kit RKF45
- Replacement sight kit WK45
- Indicator Pop-up kit. DPK-05


Mounting Kit see page 64

- Mounting kit. FBK5

APPLICATIONS

- Food plants
- Pharmaceutical
- Instrumentation


PERFORMANCE CHARACTERISTICS

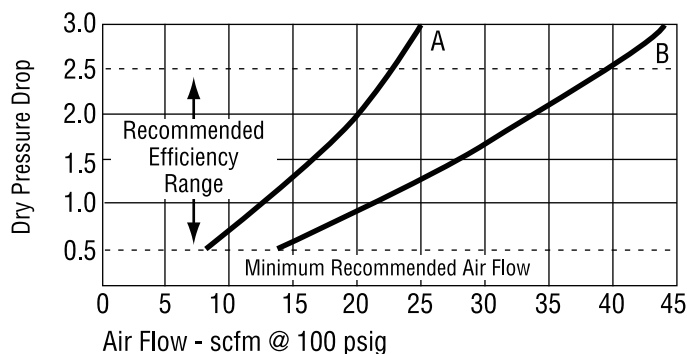

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/4"	F652W	24	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7
3/8"	F653W	37	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7
1/2"	F654W	37	6 oz.	2 3/4	3/4	7 5/8	2 1/2	1.7

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

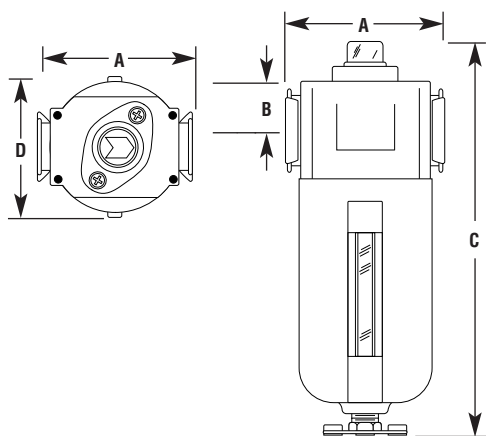

MidFlow Adsorber Filters



FEATURES

- Protects end processes from gaseous oil contamination and rids compressed air of offensive oily odors
- Removes hydrocarbons for use in analytical instruments
- Low pressure drop
- Pop-up indicator indicates abnormal condition such as plugged element or excessive flow. Critical protection requires changing element at regular intervals.
- 10 oz./20 oz. black coated metal bowl with liquid level sight
- Black coated aluminum housing
- Manual 1/8" NPT twist drain

OPTIONS

add suffix to part number in alpha order

- M** Metal bowl
without sight glass F674M

SPECIFICATIONS

Metal Bowl

- Zinc black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Zinc black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Element

- Multi-wrapped layers of impregnated activated charcoal particles to increase purification qualities. If the compressed air has been prepared by a suitable refrigerated dryer and F5A coalescer filter, the F6 Absorber will insure oil concentrations of .0015 PPM by weight. In all cases, an F5 coalescer must precede an F6 Absorber. To prevent any particle migration downstream an F3 with 3 micron element should be installed downstream for total system protection.

Body Black E coated aluminum

Baffle plastic

Seals Buna N

Bowl Kits

- Metal bowl without sight BKF47M
- Metal bowl with sight. BKF47W

Element Kits

- Charcoal wrapped EK67, EK68

Repair Kits

- Repair kit RKF47, RKF48
- Replacement sight kit WK57
- Indicator Pop-up kit. DPK-05



Mounting Kit see page 64

- Mounting kit FBK7

APPLICATIONS

- Food plants
- Pharmaceutical
- Instrumentation

PERFORMANCE CHARACTERISTICS

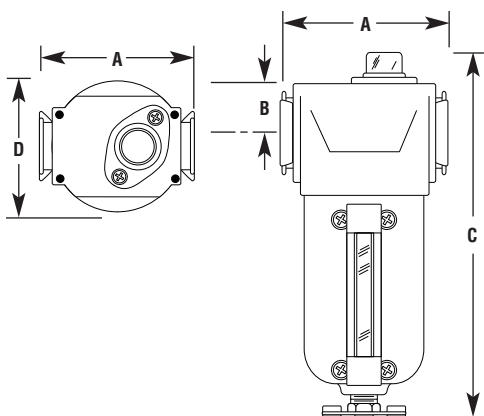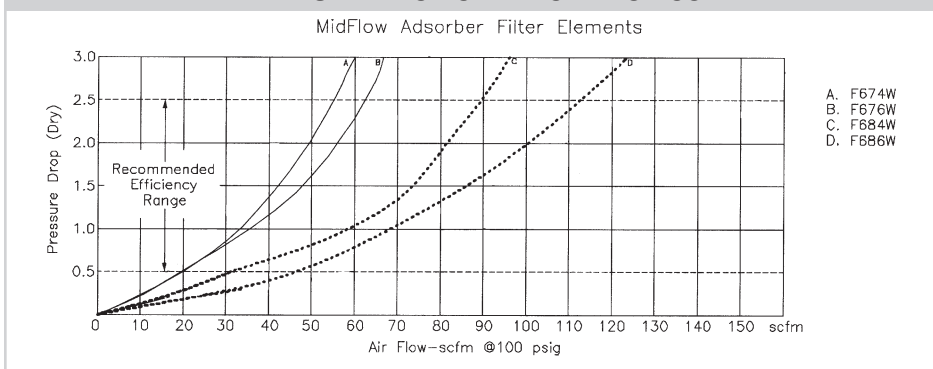

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/2"	F674W	56	10 oz.	3 3/4	1 1/8	8 1/4	3	2.7
1/2"	F684W	90	20 oz.	3 3/4	1 1/8	11 1/2	3	3.8
3/4"	F676W	60	10 oz.	3 3/4	1 1/8	8 1/4	3	2.7
3/4"	F686W	110	20 oz.	3 3/4	1 1/8	11 1/2	3	3.8

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.



High Flow Adsorber Filters

F6

FEATURES

- Protects end processes from gaseous oil contamination and rids compressed air of offensive oily odors
- Removes hydrocarbons for use in analytical instruments
- Low pressure drop
- Black coated bowl
- Manual 1/8" NPT twist drain

OPTIONS

add suffix to part number in alpha order

D Differential pressure gauge . . F608-10D

For Metal Bowl without sight delete W

SPECIFICATIONS

Metal Bowl

- Steel, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Steel, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Element

- Multi-wrapped layers of impregnated activated charcoal particles to increase purification qualities. If the compressed air has been prepared by a suitable refrigerated dryer and F5A Coalescer filter, the F6 Absorber will insure oil concentrations of .0015 PPM by weight. In all cases, an F5 Coalescer must precede an F6 Absorber. To prevent any particle migration downstream an F3 with 3 micron element should be installed downstream for total system protection.

Body Black E coated aluminum

Baffle aluminum

Seals Buna N

Bowl Kits

- Metal bowl with sight. BKF329W
- Metal bowl without sight BKF329M
- Metal bowl with sight. BKF364W
- Metal bowl without sight BKF364

Element Kits

- Charcoal wrapped 605 EKF605
- Charcoal wrapped 608 EKF608



Repair Kit

- Repair kit RKF505
RKF508
- Replacement sight kit WK35
- Indicator pop-up kit DPK-05

APPLICATIONS

- Food plants
- Pharmaceutical
- Instrumentation

PERFORMANCE CHARACTERISTICS

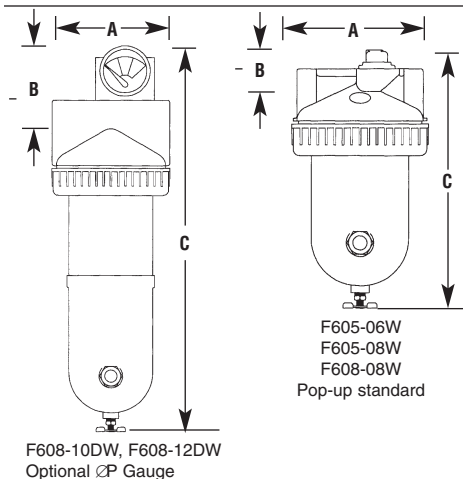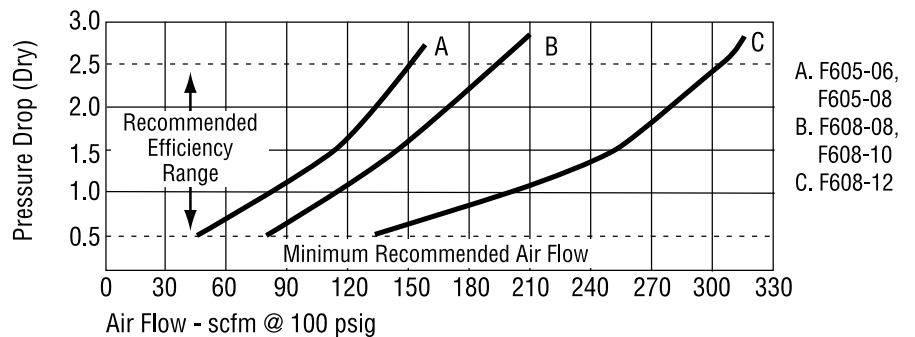

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3/4"	F605-06W	29 oz.	185	4 ⁷ / ₈	1 ³ / ₁₆	9 ¹³ / ₃₂	3.7
1"	F605-08W	29 oz.	185	4 ⁷ / ₈	1 ³ / ₁₆	9 ¹³ / ₃₂	3.7
1"	F608-08W	60 oz.	300	4 ⁷ / ₈	1 ³ / ₁₆	14 ¹³ / ₃₂	6.0
1 ¹ / ₄ "	F608-10W	60 oz.	300	5 ¹ / ₄	1 ¹ / ₂	16 ³ / ₄	6.3
1 ¹ / ₂ "	F608-12W	60 oz.	400	5 ¹ / ₄	1 ¹ / ₂	16 ³ / ₄	6.3

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

High Flow Adsorber Filters



Gauge Optional

FEATURES

- Protects end processes from gaseous oil contamination and rids compressed air of offensive oily odors
- Removes hydrocarbons for use in analytical instruments
- Low pressure drop
- Manual 1/4" NPT twist drain

OPTIONS

add suffix to part number in alpha order

- D** Differential pressure gauge . F610-10D
T External Float Drain F610-10T
W Metal bowl
 with sight glass F610-10W

SPECIFICATIONS

Metal Bowl

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Body Black coated aluminum

Baffle plastic

Seals Buna N

Element

- Multi-wrapped layers of impregnated activated charcoal particles to increase purification qualities. If the compressed air has been prepared by a suitable refrigerated dryer and F5A Coalescer filter, the F6 Absorber will insure oil concentrations of .0015 PPM by weight. In all cases, an F5 Coalescer must precede an F6 Absorber. To prevent any particle migration downstream an F3 with 3 micron element should be installed downstream for total system protection.

KITS

- Float for External Drain 5200
- Drain Trap Kit DKTF2

Bowl Kits

- Metal bowl with sight. BKF510W
- Metal bowl without sight BKF510M
- Metal bowl with sight. BKF518W
- Metal bowl without sight BKF518M
- Metal bowl with sight. BKF528W
- Metal bowl without sight BKF528M

Element Kits

- Charcoal wrapped EKF610, EKF618, EKF628



Repair Kits

- Repair kit RKF511 RKF519 RKF529
- Replacement sight kit BSF510

APPLICATIONS

- Food plants
- Pharmaceutical
- Instrumentation


PERFORMANCE CHARACTERISTICS

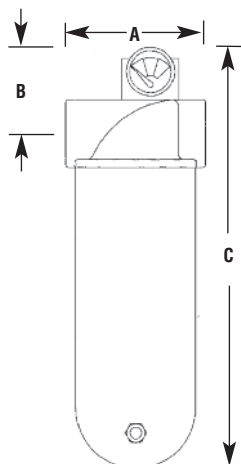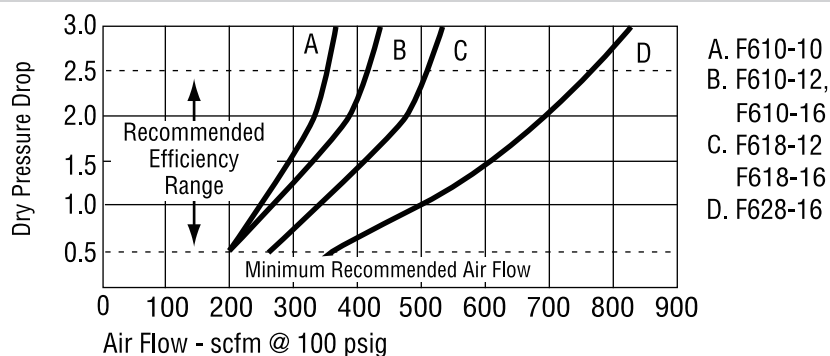

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1"	F610-08	100 oz.	420	6½	2	21	16
1¼"	F610-10	100 oz.	420	6½	2	21	16
1½"	F610-12	100 oz.	475	6½	2	21	16
1½"	F618-12	200 oz.	590	6½	2	28¾	19
2"	F610-16	100 oz.	475	6½	2	21	16
2"	F618-16	200 oz.	590	6½	2	28¾	19
2"	F628-16	300 oz.	840	6½	2	39	23

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

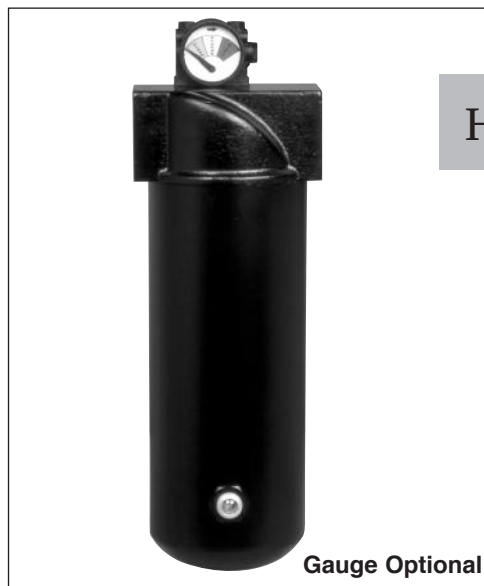

High Flow Adsorber Filters

F6

SPECIFICATIONS

Metal Bowl

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Body Black coated aluminum

Baffle plastic

Seals Buna N

Element

- Multi-wrapped layers of impregnated activated charcoal particles to increase purification qualities. If the compressed air has been prepared by a suitable refrigerated dryer and F5A Coalescer filter, the F6 Absorber will insure oil concentrations of .0015 PPM by weight. In all cases, an F5 Coalescer must precede an F6 Absorber. To prevent any particle migration downstream an F3 with 3 micron element should be installed downstream for total system protection.

KITS

- Float for External Drain 5200
- Drain Trap Kit DKTF2

Bowl Kits

- Metal bowl with sight BKF510W
- Metal bowl without sight BKF510M
- Metal bowl with sight BKF518W
- Metal bowl without sight BKF518M
- Metal bowl with sight BKF528W
- Metal bowl without sight BKF528M

Element Kits

- Charcoal wrapped EKF611, EKF619, EKF629

Repair Kits

- Repair kit RKF511 RKF519 RKF529
- Replacement sight kit BSF510

APPLICATIONS

- Food plants
- Pharmaceutical
- Instrumentation

FEATURES

- Protects end processes from gaseous oil contamination and rids compressed air of offensive oily odors
- Removes hydrocarbons for use in analytical instruments
- Low pressure drop
- Manual 1/4" NPT twist drain

OPTIONS



add suffix to part number in alpha order

D Differential pressure gauge . . F611-24D

T External Float Drain F611-24T

W Metal bowl with sight glass F611-24W

PERFORMANCE CHARACTERISTICS

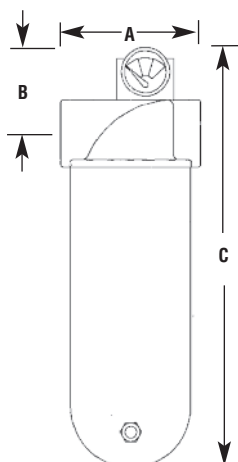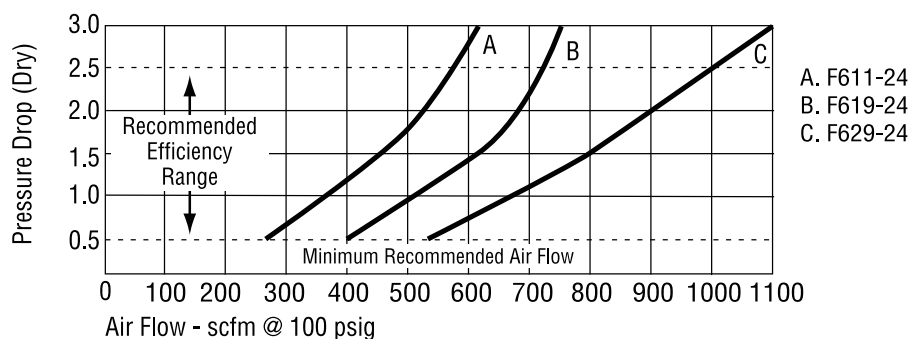

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3"	F611-24	100 oz.	620	7 ⁵ / ₈	2 ¹ / ₄	22 ¹¹ / ₁₆	21
3"	F619-24	200 oz.	770	7 ⁵ / ₈	2 ¹ / ₄	31 ³ / ₁₆	24
3"	F629-24	300 oz.	1100	7 ⁵ / ₈	2 ¹ / ₄	41 ⁷ / ₁₆	28


* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.



TWO-IN-ONE FILTERS

The Arrow F7 Series Two-in-One Filter maximizes filter efficiency, extends element life and allows for easy maintenance.

Untreated air enters the filter and flows through the inside portion of the element where it is first filtered through a pleated, 3 micron absolute particulate element. This pleated element uses a large surface area to filter dirt and solid particles down to .3 micron in size with 95% efficiency. The air then travels through the .03 micron element which coalesces oil aerosols into liquid form. Oil removal occurs on the outer layer of the element and accumulates in the bowl sump.

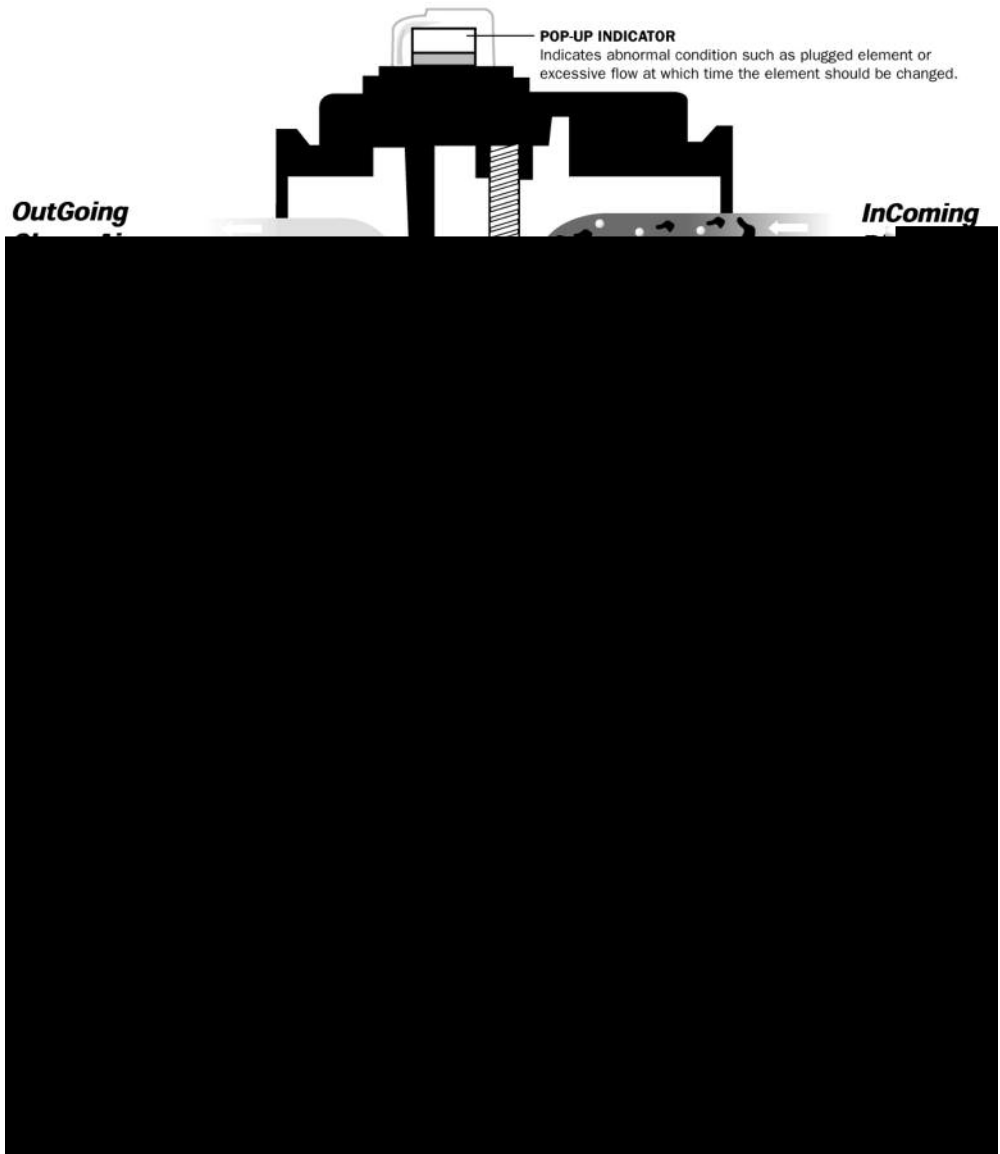

MidFlow Two-in-One Coalescing Filters

F7



FEATURES

- 3 Micron absolute protection for .03 micron coalescing element
- Pop-up indicator indicates abnormal condition such as plugged element or excessive flow. Critical protection requires changing element at regular intervals.
- Low pressure drop
- 10 oz. or 20 oz. black coated metal bowl with liquid level sight
- Manual 1/8" NPT twist drain

OPTIONS

add suffix to part number in alpha order

Float Drain

F Internal float drain F774FW

Overnight Drains

When a compressed air system is shut down, an overnight drain clears accumulated condensate from a filter bowl when the pressure falls to 3 psig or less.

K Overnight drain for metal bowl F774KW
Twist to manually drain.

M Black coated metal bowl . . . F774M

SPECIFICATIONS

Metal Bowl

- Zinc, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Zinc, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain Note: limits bowl temperature and pressure ratings

- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Body Black E coated aluminum

Baffle plastic

Seals Buna N

Elements

- .03 micron borosilicate glass fiber D.O.P. Efficiency: 99.97%, Particle size removal, Remaining oil content by wt.: .015 PPM with 3 micron absolute protection

KITS

- Internal float drain kit 5200
- Overnight Metal (K) CKFK

Bowl Kits

- 10 oz. with sight BKF47W
- 10 oz. without sight BKF47M
- 20 oz. with sight BKF48W
- 20 oz. without sight BKF48M

Element Kits

- .03 micron EK77
- EK78


Repair Kits

- Repair kit RKF47, RKF48
- Replacement sight kit WK57
- Indicator Pop-up kit DPK-05

Mounting Kit see page 64

- Mounting kit FBK7


PERFORMANCE CHARACTERISTICS

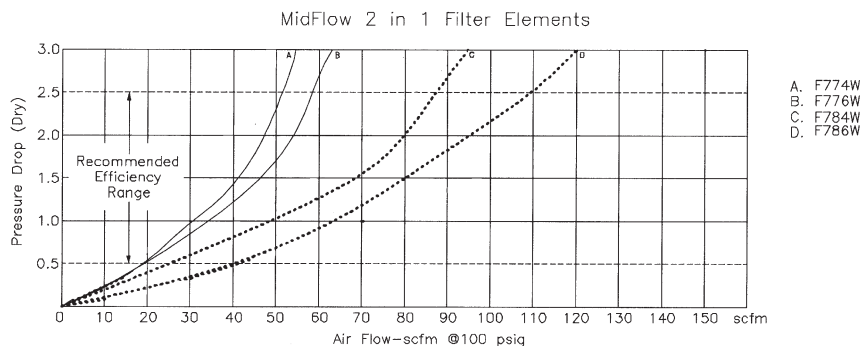

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/2"	F774W	55	10	3 3/4	1 1/8	8 1/4	3	2.7
1/2"	F784W	90	20	3 3/4	1 1/8	11 1/2	3	3.6
3/4"	F776W	60	10	3 3/4	1 1/8	8 1/4	3	2.7
3/4"	F786W	110	20	3 3/4	1 1/8	11 1/2	3	3.6

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

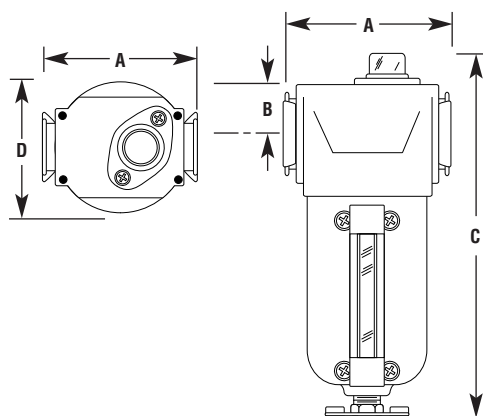

High Flow Two-in-One Coalescing Filters

F7



FEATURES

- 3 Micron absolute protection for .03 micron coalescing element
- Manual 1/8" NPT twist drain
- Low pressure drop

OPTIONS

add suffix to part number in alpha and numeric order

D Differential pressure gauge . F708-10D

Float Drain

F Internal float drain F705-06FW

Overnight Drains

When a compressed air system is shut down, an overnight drain clears accumulated condensate from a filter bowl when the pressure falls to 3 psig or less.

K Overnight drain for metal bowl F708-08KW
Twist to manually drain.

For Metal Bowl without sight delete W

SPECIFICATIONS

Metal Bowl

- Zinc, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with sight

- Zinc, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

Internal Float Drain

- Buna N float

Note: limits bowl temperature and pressure rating

- Operating pressure range 30 to 175 psig
- Operating temperature range 40°F to 120°F

Body black E coated aluminum

Baffle aluminum

Seals Buna N

Elements

- .03 micron borosilicate glass fiber
- D.O.P. Efficiency: 99.97%, Particle size removal, Remaining oil content by wt.: .015 PPM with 3 micron absolute protection

KITS

- Internal float drain kit 5200
- Overnight Drain Kit (K) CKFK

Bowl Kits

- Metal with sight F505 BKF329W
- Metal without sight F505 BKF329M
- Metal with sight F508 BKF364W
- Metal without sight F508 BKF364M



Element Kits

- .03 micron 505 EKF705
- .03 micron 508 EKF708

Repair Kits

- Repair kit 505 RKF505
- Repair kit 508 RKF508
- Replacement sight kit WK35
- Indicator pop-up kit DPK-05

PERFORMANCE CHARACTERISTICS

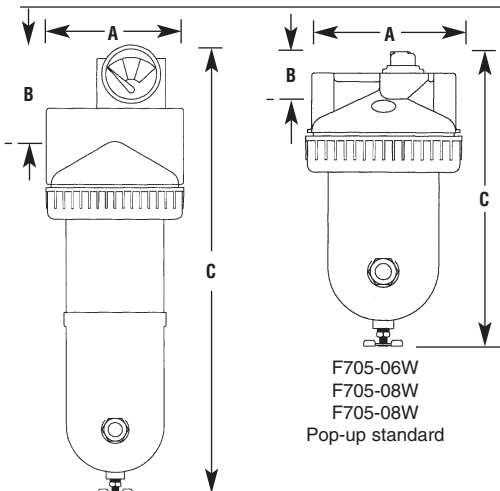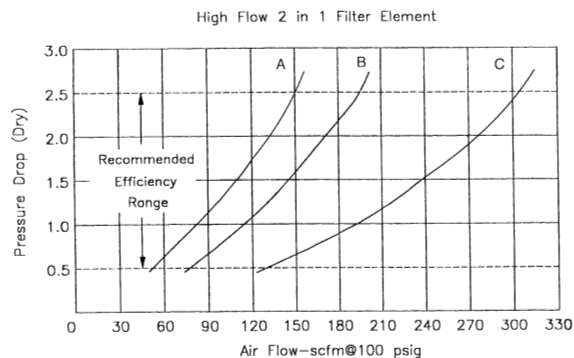

F708-10W, F708-12W
Optional ΔP Gauge

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3/4"	F705-06W	29 oz.	150	4 ⁷ / ₈	1 ³ / ₁₆	9 ¹³ / ₃₂	3.7
1"	F705-08W	29 oz.	150	4 ⁷ / ₈	1 ³ / ₁₆	9 ¹³ / ₃₂	3.7
1"	F708-08W	60 oz.	200	4 ⁷ / ₈	1 ³ / ₁₆	14 ¹³ / ₃₂	6.0
1 1/4"	F708-10W	60 oz.	200	5 ⁵ / ₃₂	3 ³ / ₄	16 ³ / ₄	6.3
1 1/2"	F708-12W	60 oz.	310	5 ⁵ / ₃₂	3 ³ / ₄	16 ³ / ₄	6.3

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.

High Flow Two-in-One Coalescing Filters

F7



Gauge Optional

FEATURES

- 3 Micron absolute protection for .03 micron coalescing element
- Low pressure drop
- Manual 1/4" NPT twist drain

OPTIONS

add suffix to part number in alpha order

D Differential pressure gauge . F710-08D

T External Float Drain F710-08T

W Metal bowl
with sight glass F710-08W

SPECIFICATIONS

Metal Bowl

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Black Coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Body Black coated aluminum

Baffle plastic

Seals Buna N

Elements

- .03 micron borosilicate glass fiber
D.O.P. Efficiency: 99.97%, Particle size removal, Remaining oil content by wt.: .015 PPM with 3 micron absolute protection

KITS

- Float for External Drain 5200
- Drain Trap Kit DKTF2

Bowl Kit

- Metal with sight BKF510W
- Metal without sight BKF510
- Metal with sight BKF518W
- Metal without sight BKF518
- Metal with sight BKF528W
- Metal without sight BKF528



Element Kits

- .03 micron EKF710, EKF718, EKF728

Repair Kits

- Repair kit RKF511, RKF519, RKF529
- Replacement sight kit BSF510

PERFORMANCE CHARACTERISTICS

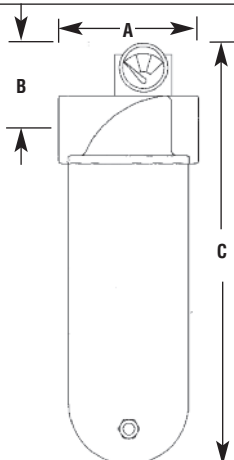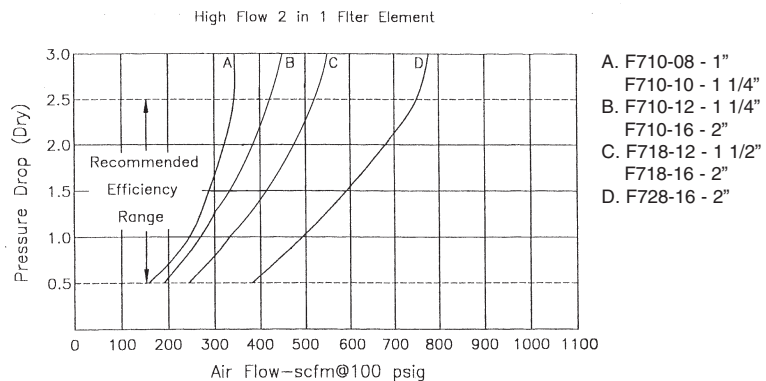

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1"	F710-08	100 oz.	310	6 1/2	2	21	16
1 1/4"	F710-10	100 oz.	310	6 1/2	2	21	16
1 1/2"	F710-12	100 oz.	415	6 1/2	2	21	16
1 1/2"	F718-12	200 oz.	515	6 1/2	2	28 3/4	19
2"	F710-16	100 oz.	415	6 1/2	2	21	16
2"	F718-16	200 oz.	515	6 1/2	2	28 3/4	19
2"	F728-16	300 oz.	765	6 1/2	2	39	23

* Flow scfm based on 2.5 psi Δp @ 100 psig inlet.

High Flow Two-in-One Coalescing Filters



Gauge Optional

FEATURES

- 3 Micron absolute protection for .03 micron coalescing element
- Low pressure drop
- Manual 1/4" NPT twist drain

OPTIONS

add suffix to part number in alpha order

D Differential pressure gauge . F711-24D

T External Float Drain F711-24T

W Metal bowl
with sight glass F711-24W

SPECIFICATIONS

Metal Bowl

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Black coated aluminum
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Body Black coated aluminum

Baffle plastic

Seals Buna N

Elements

- .03 micron borosilicate glass fiber
D.O.P. Efficiency: 99.97%, Particle size removal, Remaining oil content by wt.: .015 PPM with 3 micron absolute protection

KITS

- Float for External Drain 5200
- Drain Trap Kit DKTF2

Bowl Kits

- Metal with sight BKF510W
- Metal without sight BKF510
- Metal with sight BKF518W
- Metal without sight BKF518
- Metal with sight BKF528W
- Metal without sight BKF528



Element Kits

- .03 micron EKF711
EKF719
EKF729

Repair Kits

- Repair kit RKF511
RKF519
RKF529
- Replacement sight kit BSF510

PERFORMANCE CHARACTERISTICS

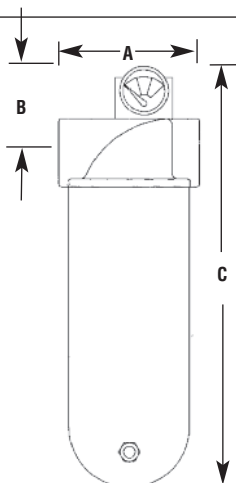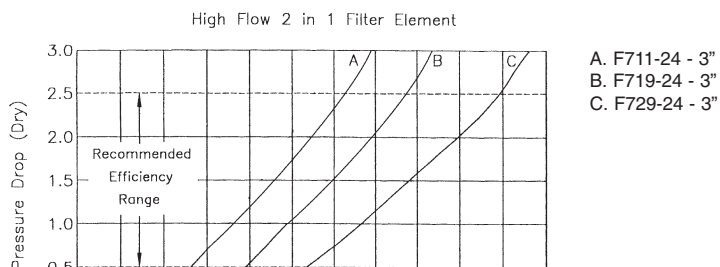

DIMENSIONS

PIPE SIZE	MODEL NO.	BOWL CAPACITY	MAX. FLOW SCFM*	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3"	F711-24	100 oz.	620	7 ⁵ / ₈	2 ¹ / ₄	22 ¹¹ / ₁₆	21
3"	F719-24	200 oz.	770	7 ⁵ / ₈	2 ¹ / ₄	31 ³ / ₁₆	24
3"	F729-24	300 oz.	1100	7 ⁵ / ₈	2 ¹ / ₄	41 ⁷ / ₁₆	28

* Flow scfm based on 2.5 psi Δ p @ 100 psig inlet.




REGULATORS

Pneumatic devices are designed to work at a certain pressure. Most devices will operate at pressures in excess of that recommended. However, operating at higher pressures can cause excess torque, force and wear and can waste compressed air. The best operation and life of the device can be obtained by using the proper pressure level. A regulator is used to reduce and maintain the pressure at a level suitable for the device.

Arrow's quality Regulators include the Miniature Series which are high performance, low cost regulators for the O.E.M. market and low flow applications up to 25 scfm. Arrow's Tri-Star Series are compact, lightweight regulators engineered for superior performance in a wide range of applications where air flow does not exceed 100 scfm. Arrow's Midflow Series regulators are compact and available in 3/8", 1/2", 3/4" & 1" with air flows exceeding 200 SCFM. Arrow's High Flow Series heavy duty regulators are for rigorous applications requiring constant pressure for flows up to 700 scfm.

The General Purpose Precision Series features state-of-the-art engineering for precision control in critical tolerance applications. The Arrow Precision Regulator lineup can be tailored to fit your specific needs. All Arrow regulators are easily panel mounted. All Arrow regulators are designed with a micro seat finish to ensure no reduced pressure creep.

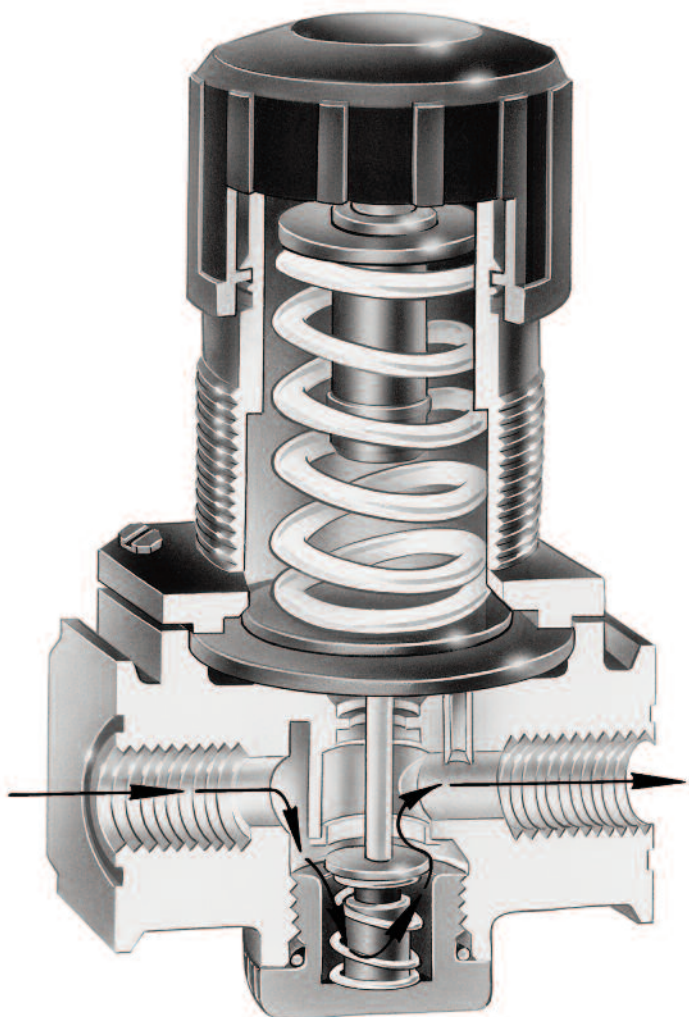

Miniature Air Regulators



SPECIFICATIONS

Body

- Zinc, black E coated

Bonnet

- Glass filled nylon

Seals

- Buna N

Supply Pressure

- 250 psig

Operating Pressure Range

- 5 to 125 psig standard
- 3 to 60 psig optional
- 3 to 20 psig optional

Operating Temperature Range

- 40°F to 120°F

Gauge Ports

- 1/8" standard, full flow

KITS

Panel Mounting Kit

- Ring only,
panel hole size 1 3/16" PK1611

Diaphragm Kits

- Relieving RK260
- Non-relieving RK260N

Bracket Kit see page 64

- Bracket and ring. BR1611

FEATURES



- Micro seat finish to ensure no reduced pressure creep
- Diaphragm operation
- Relieving style standard
- Three position non-rising adjustment knob; push to lock, pull to adjust, detach to make tamper resistant
- Easily panel mounted
- Tamper-proof cap included

OPTIONS

add suffix to part number in alpha order

- B** 2-Position mechanical
Lock Knob R162B
- G** Gauge (5-160 psi) R162G
- I** Instrument pressure R162I
3 to 20 psi adjustment
- L** Low pressure R162L
3 to 60 psi adjustment
- N** Non-relieving R162N
- P** Panel mount R162P
- U** No gauge ports R162U

PERFORMANCE CHARACTERISTICS

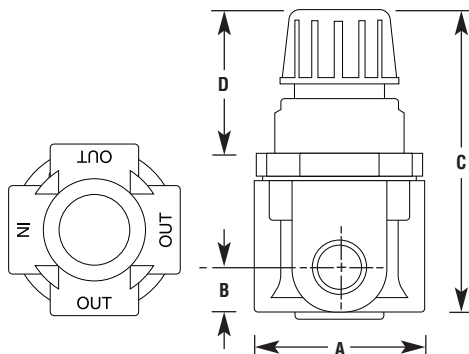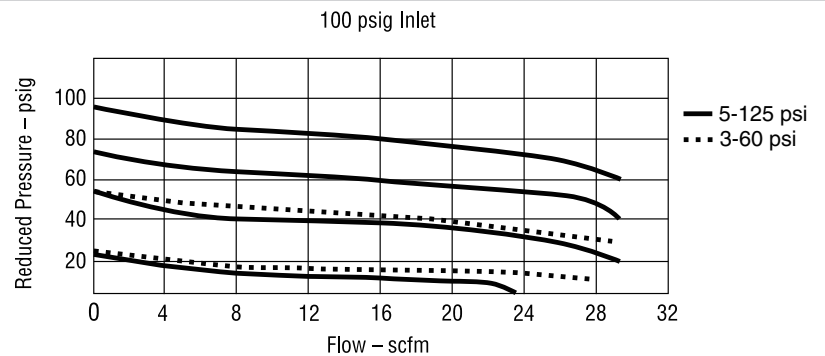

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM	DIMENSIONS (INCHES)				WEIGHT (OZS.)
			A	B	C	D	
1/8"	R161	25	1 1/2	1/2	2 3/4	1 1/4	6
1/4"	R162	25	1 1/2	1/2	2 3/4	1 1/4	6

Miniature Air Regulators

R26



FEATURES

- Micro seat finish to ensure no reduced pressure creep
- Diaphragm operation
- Relieving style standard
- Three position non-rising adjustment knob; push to lock, pull to adjust, detach to make tamper resistant
- Easily panel mounted
- Tamper-proof cap included
- Lightweight

OPTIONS

add suffix to part number in alpha order

- B** 2-Position Mechanical
Lock Knob R262B
- G** Gauge (0-160 psi) R262G
- I** Instrument pressure R262I
3 to 20 psi adjustment
- L** Low pressure R262L
3 to 60 psi adjustment
- N** Non-relieving R262N
- P** Panel mount R262P
- U** No gauge ports R262U
- V** All 1/4" ports R262V
- Y1** Viton diaphragm/valve set R262Y1
- Y2** EDPM diaphragm/valve set R262Y2

SPECIFICATIONS

Body

- Glass filled nylon

Bonnet

- Glass filled nylon

Seals

- Buna N

Supply Pressure

- 250 psig

Operating Pressure Range

- 5 to 125 psig standard
- 3 to 60 psig optional
- 3 to 20 psig optional

Operating Temperature Range

- 40°F to 120°F

Gauge Ports

- 1/8" standard, full flow

KITS

Panel Mounting Kit

- Ring only,
panel hole size 1 3/16" PK1611

Diaphragm Kits

- Relieving RK260
- Non-relieving RK260N



Bracket Kit see page 64

- Bracket and ring. BR1611

Applications

- Non-relieving diaphragm can be used on liquid applications

PERFORMANCE CHARACTERISTICS

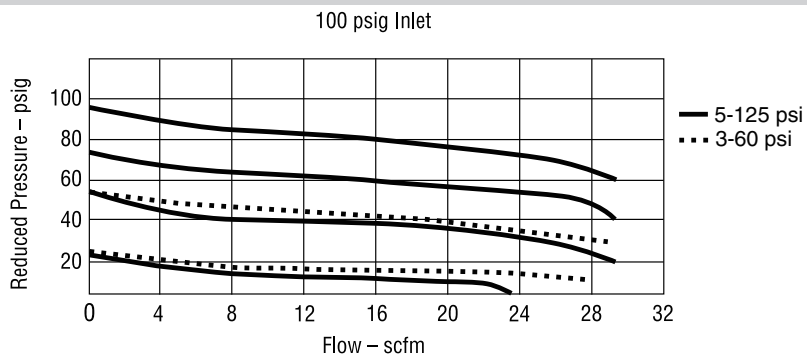

C

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM	DIMENSIONS (INCHES)				WEIGHT (OZS.)
			A	B	C	D	
1/8"	R261	25	1 1/2	1/2	2 3/4	1 1/4	2
1/4"	R262	25	1 1/2	1/2	2 3/4	1 1/4	2



Tri•Star Regulators

R35

FEATURES

- Micro finished brass seat to ensure no reduced pressure creep
- Reinforce diaphragm for repeated accuracy
- Minimal pressure droop due to efficient aspiration
- Three position non-rising adjustment knob; push to lock, pull to adjust, detach to make tamper resistant
- Relieving style standard
- In-line or modular installation
- Easily panel mounted
- Tamper-proof cap included
- High scfm flow due to efficient aspiration

OPTIONS

add suffix to part number in alpha order

- G** Gauge (0-160 psi) R354**G**
H High pressure R354**H**
 10 to 250 psi adjustment
I Instrument pressure R354**I**
 3 to 20 psi adjustment
L Low pressure R354**L**
 3 to 60 psi adjustment
N Non-relieving R354**N**
P Panel mount R354**P**
T Tee handle adjustment R354**T**

SPECIFICATIONS

Body

- Black E coated aluminum

Bonnet

- Glass filled nylon

Seals

- Buna N Elastomer standard

Seat

- Brass

Supply Pressure

- 250 psig

Operating Pressure Range

- 5 to 125 psig

Operating Temperature Range

- 40°F to 120°

Gauge Port

- 1/4" full flow

KITS



Repair Kits

- Diaphragm kit relieving DK35
- Diaphragm kit
Non-relieving DK35N
- Valve kit VK35

Mounting Kits see page 65

- Bracket kit RBK5
- Panel mounting kit ring only
panel hole size 1 3/16" PKR35
- Panel mount
bracket and ring PMKR35

PERFORMANCE CHARACTERISTICS

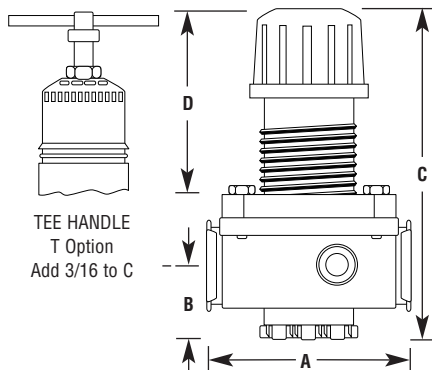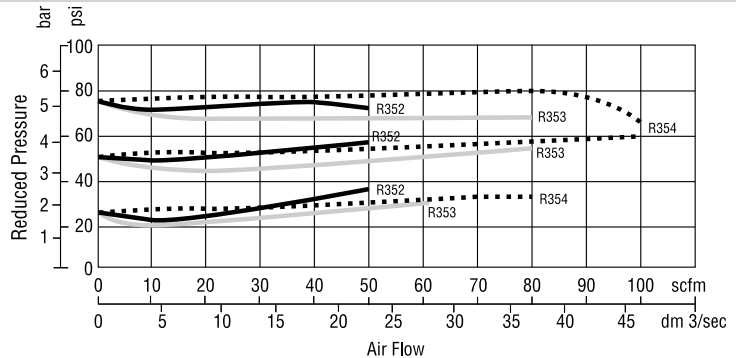

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM	A	DIMENSIONS (INCHES)				E (WIDTH)	WEIGHT (LBS.)
1/4"	R352	50	2 21/32	1 7/32	5 3/8	2 3/4	2 1/4		1.0
3/8"	R353	80	2 21/32	1 7/32	5 3/8	2 3/4	2 1/4		1.0
1/2"	R354	100	2 21/32	1 7/32	5 3/8	2 3/4	2 1/4		1.0

MidFlow Regulators



FEATURES

- Micro finished brass seat to ensure no reduced pressure creep
- Reinforce diaphragm for repeated accuracy
- Minimal pressure droop due to efficient aspiration
- Three position non-rising adjustment knob; push to lock, pull to adjust, detach to make tamper resistant
- Relieving style standard
- Easily panel mounted
- Tamper-proof cap included
- High scfm flow due to efficient aspiration

OPTIONS

add suffix to part number in alpha order

- G** Gauge (0-160 psi) R374G
H High pressure R374HT
 10 to 250 psi adjustment - *Must use T-handle option*
I Instrument pressure R374I
 3 to 20 psi adjustment
L Low pressure R374L
 3 to 60 psi adjustment
N Non-relieving R374N
P Panel mount R374P
T Tee handle adjustment R374T

SPECIFICATIONS

Body

- BlackE coated aluminum

Bonnet

- Glass filled nylon

Seals

- Buna N Elastomer standard

Seat

- Brass

Supply Pressure

- 250 psig

Operating Pressure Range

- 5 to 125 psig

Operating Temperature Range

- 40°F to 120°

Gauge Port

- 1/4" full flow

KITS



Repair Kits

- Diaphragm kit relieving DK35
- Diaphragm kit Non-relieving DK35N
- Valve kit VK37

Mounting Kits see page 64

- Bracket kit RBK7
- Panel mounting kit ring only panel hole size 1 3/16" PKR35
- Panel mount bracket and ring PMKR37

PERFORMANCE CHARACTERISTICS

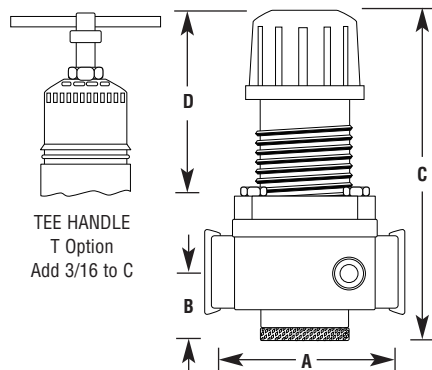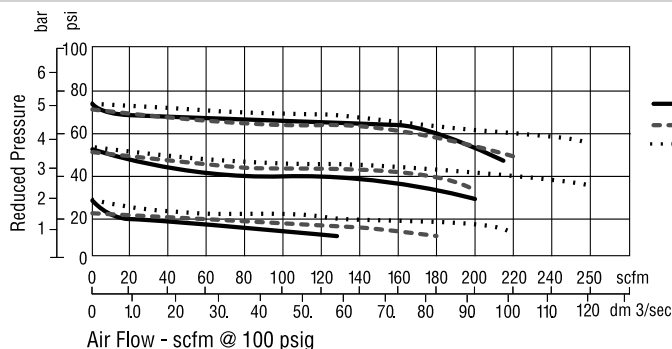

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM	A	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				B	C	D	E (WIDTH)	
1/2"	R374	215	37/16	1 13/32	57/8	2 3/4	2 1/4	1.3
3/4"	R376	220	37/16	1 13/32	57/8	2 3/4	2 1/4	1.3
1"	R378	250	37/16	1 13/32	57/8	2 3/4	2 1/4	1.3

High Flow Regulators



SPECIFICATIONS

Body

- Black E coated aluminum

Bonnet

- Die cast aluminum, black E coated

Seals

- Buna N Elastomer standard

Seat

- Brass

Supply Pressure

- 250 psig

Operating Pressure Range

- 5 to 125 psig

Operating Temperature Range

- 40°F to 120°F

Gauge Ports

- $\frac{1}{4}$ "

KITS

Repair Kit

- Piston relieving DK39
- Valve VK39
- Spring (5-125 psi) SK39
- Spring (3-60 psi) SK39L
- Spring (10-200 psi) SK39H
- Spring cage SC39

Mounting Kits see page 64

- Bracket Kit RBK39
- Panel mounting kit ring only PKR39
panel hole size $1\frac{3}{16}$ "

FEATURES



- Micro finished brass seat to ensure no reduced pressure creep
- Relieving style piston standard
- High scfm flow due to efficient aspiration
- Hard epoxy corrosion protection
- Available in 1", 1-1/4", 1-1/2" NPT sizes

OPTIONS

add suffix to part number in alpha order

- G** Gauge (0-160 psi) R398**G**
- H** High pressure R398**H**
10 to 250 psi adjustment
- L** Low pressure R398**L**
3 to 60 psi adjustment
- P** Panel mount R398**P**

PERFORMANCE CHARACTERISTICS

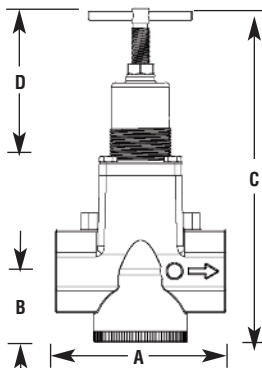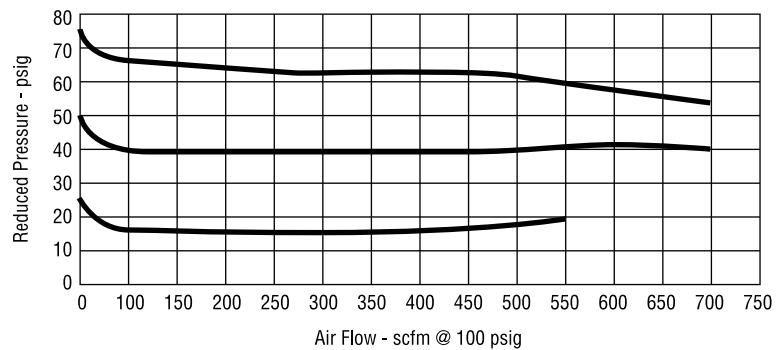

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM	A	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				B	C	D	
1"	R398	600	4 ⁷ / ₈	2 ¹ / ₃₂	9 ¹ / ₂	4 ¹ / ₄	3.4
1 ¹ / ₄ "	R3910	700	4 ⁷ / ₈	2 ¹ / ₃₂	9 ¹ / ₂	4 ¹ / ₄	3.3
1 ¹ / ₂ "	R3912	700	4 ⁷ / ₈	2 ¹ / ₃₂	9 ¹ / ₂	4 ¹ / ₄	3.2

Miniature Integral Filter/Regulators

B74



FEATURES

- Micro seat finish to ensure no reduced pressure creep
- Diaphragm operation
- Relieving style standard
- Three position non-rising adjustment knob; push to lock, pull to adjust, detach to make tamper resistant
- Easily panel mounted
- Tamper-proof cap included
- 20 micron filter

OPTIONS

add suffix to part number in alpha and numeric order

- B** 2-Position Mechanical
Lockout Knob B742B
- G** Gauge (0-160 psi) B742G
- I** Instrument pressure B742I
3 to 20 psi Adjustment
- J** Overnight drain plastic bowl . . . B742J
- K** Overnight drain metal bowl . . . B742K
- L** Low pressure B742L
3 to 60 psi adjustment
- M** Metal bowl B742M
- N** Non-relieving B742N
- P** Panel mount B742P
- Z** Piston drain B742Z
- 5** 5 Micron element B7425

SPECIFICATIONS

Body

- Zinc, black E coated

Bonnet

- Glass filled nylon

Baffle plastic

Seals Buna N

Polycarbonate Bowl

- Max. pressure 150 psig
- Operating pressure range 5 to 125 psig
- Operating temperature range 40°F to 125°F

Metal Bowl aluminum

- Max. pressure 150 psig
- Operating pressure range 5 to 125 psi
- Operating temperature range 40°F to 160°F

Piston Drain metal

Note: limits bowl temperature and pressure rating

- Max. pressure 150 psig
- Operating temperature range 40°F to 160°F

Elements

- 20 micron sintered bronze
- 5 micron sintered bronze

KITS

Bowl Kits

- Polycarbonate bowl BKF300
- Metal bowl BKF300M

Element Kit

- 20 micron element 2-pack . . . EKF300
- Regulator bonnet repair RB260



Diaphragm Kit

- Relieving diaphragm RK260

Mounting Kits see page 64

- Mounting bracket and ring . . . BR1611
- Mounting bracket ring only . . . PK1611

PERFORMANCE CHARACTERISTICS

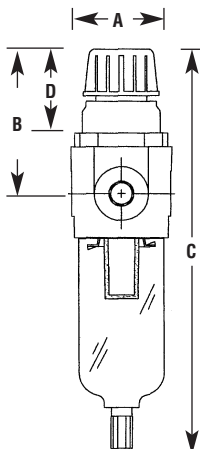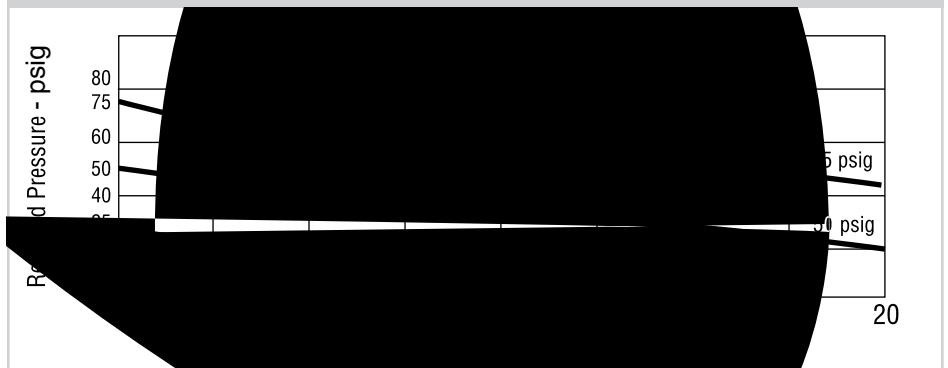

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/8"	B741	20	1 oz.	1 5/8	2 3/16	6 1/4	1 1/4	.6
1/4"	B742	20	1 oz.	1 5/8	2 3/16	6 1/4	1 1/4	.6

FE

- 4
- 1
- 2
- 3
- 1

OF

add
nur

F

G

H

I

J

K

L

M

P

T

W

-5

-3

SIZE	MODEL NO.	SCFM	CAPACITY	A	B	C	D	E	(LBS.)
1/4"	B752	80	5 oz.	2 ²¹ / ₃₂	4 ⁵ / ₃₂	9 ³ / ₄	2 ¹ / ₄		1.75
3/8"	B753	80	5 oz.	2 ²¹ / ₃₂	4 ⁵ / ₃₂	9 ³ / ₄	2 ¹ / ₄		1.75
1/2"	B754	100	5 oz.	2 ²¹ / ₃₂	4 ⁵ / ₃₂	9 ³ / ₄	2 ¹ / ₄		1.75

LUBRICATORS

Most pneumatically operated equipment such as valves, cylinders, and air tools, require some form of lubrication to reduce equipment maintenance and prolong life.

Air driven devices can be lubricated by using an air line lubricator, a device for adding lubricating oil in aerosol form into the compressed air line. The air passing through the lubricator transports the lubricant to air tools, cylinders or other air driven devices where the lubricant is deposited on moving and sliding surfaces to reduce friction and wear.


Arrow offers four distinct types: Miniature, Arrowfog, Ultrafog, Wick Style.

Miniature Fog-Type lubricators are designed for low air flow applications where space is limited.

Arrowfog in TriStar and Midflow lubricators are the most popular units for applications that do not require extremely fine oil particles or long distance lubrication. They produce oil particles of 2.5 micron. Arrowfog sends all metered oil down line in fog droplets; accommodates a wide range of applications.

Arrow Ultrafog in Tri-Star and Midflow lubricators produce extremely fine, .4 micron oil particles. Due to their size, these molecules remain in suspension and are carried further downstream than the particles from an Arrowfog. Arrow Ultrafog allows precise adjustment control. Atomizes oil droplets to a fine mist for reclassification in the bowl before sending lighter particles of oil down line.

Arrowwick lubricators are economical and reliable for lubricating tools or cylinders that run constantly. The Arrowwick automatically maintains the same air-oil ratio regardless of variations in air flow. The average droplet size is 3 microns. Arrowwick uses an adjustable saturated wick to send particles or oil down line.

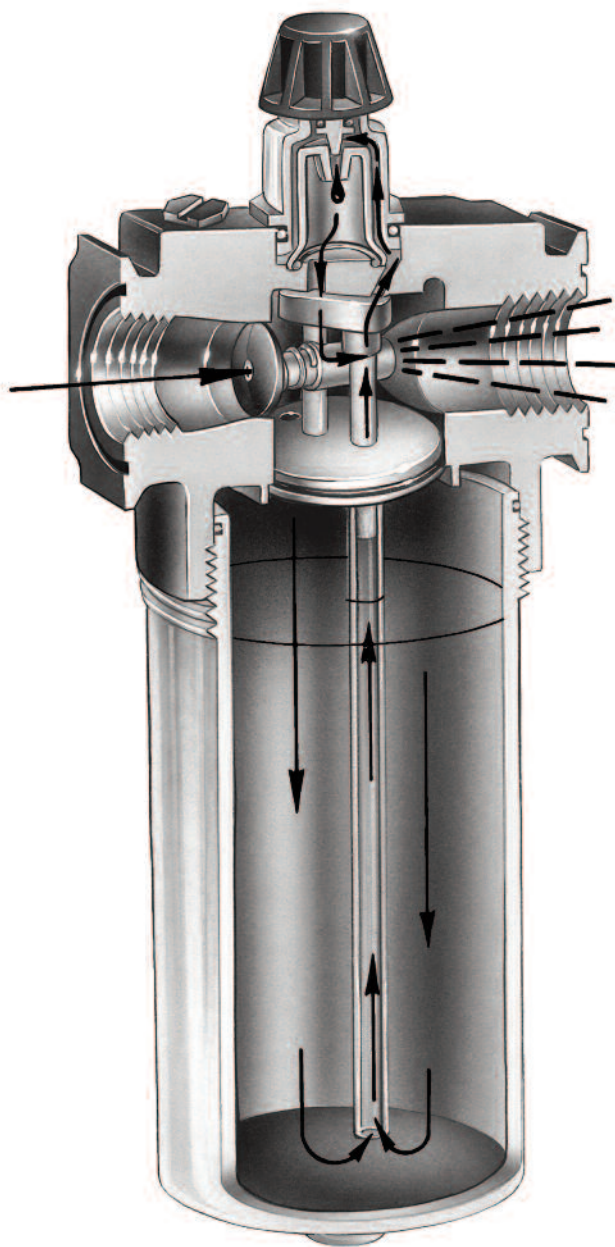

Miniature Fog Lubricators



FEATURES

- 1 oz. polycarbonate bowl
- Optional metal bowl
- Visible drip rate
- Easy to refill
- Fine adjustment screw
- Requires only .1 cfm of air flow to operate
- Automatically adjusts oil mist delivery with air flow variations

OPTIONS

add suffix to part number in alpha order

M Metal bowl L182M

SPECIFICATIONS

WARNING! Polycarbonate plastic bowls could rupture if exposed to incompatible chemicals whether inside or outside the bowl. If such chemicals are present, use a metal bowl.

Body

- Zinc, black E coated

Polycarbonate Bowl

- Max. pressure 150 psi
- Operating temperature range 40°F to 125°F

Metal Bowl

- Black coated aluminum
- Max. pressure 200 psi
- Operating temperature range 40°F to 160°F

Recommended Oil

- SAE 10 oil or lighter
- Atomized average 2 micron
- .1 scfm to establish drip rate

KITS

Bowl Kits

- Polycarbonate BK1811
- Metal BK1811M
- Repair kit RKL1812
- Dome Kit AK35



Mounting Kit see page 64

- Mounting kit FBK3

Feature

- No tools necessary for lubrication adjustment.

PERFORMANCE CHARACTERISTICS

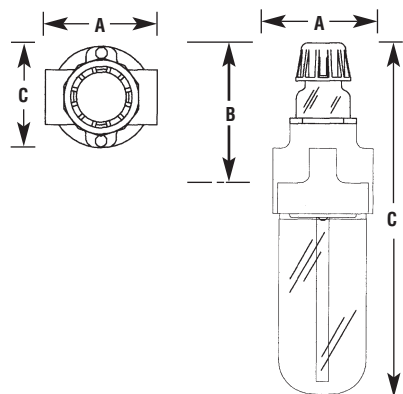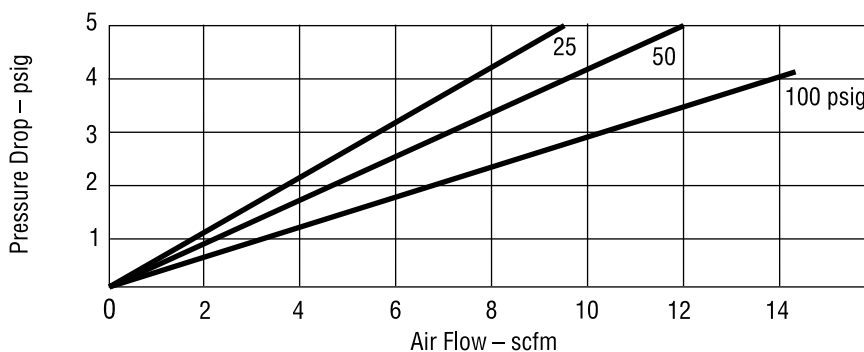


DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
1/8"	L181	16	1 oz.	1 1/2	2	5	.4
1/4"	L182	16	1 oz.	1 3/8	2	5	.4

* Flow scfm based on 5.0 psi Δp @ 100 psig inlet.

PERFORMANCE CHARACTERISTICS

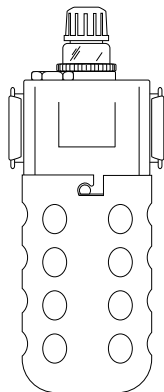

DIMENSIONS								
PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	

WEIGHT
(LBS.)



MidFlow Series 3 Arrowfog Lubricators

L3

FEATURES

- Oil delivery at low air flow approximately 2 scfm
- Lubricator may be filled without shutting down air line
- 3-position non-rising adjustment knob; push to lock, pull to adjust, detach for tamper resistant
- Can be converted on-line to Ultrafog lubricator with interchangeable module
Part # RKL472 or RKL482

OPTIONS

add suffix to part number in alpha order

- M** 10 oz. black coated metal bowl L374M

SPECIFICATIONS

Body

- BlackE coated aluminum

Metal Bowl

- Zinc, black E coated
- Max. pressure 200 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Zinc, black E coated
- Max. pressure range 200 psig
- Operating temperature range 40°F to 160°F

Recommended Oil

- SAE 10 oil or lighter
- 3 scfm to establish drip rate
- Atomized average 2 micron droplet

KITS

Bowl Kits

- Metal bowl with sight BKL47W
- Metal bowl without sight BKL47M
- Metal bowl with sight BKL48W
- Metal bowl without sight BKL48M



Repair Kits

- For L370 RKL372
- For L380 RKL382
- Dome kit AK35
- Fill plug kit FK37
- Sight kit WK57

Mounting Kit see page 64

- Mounting kit FBK7

PERFORMANCE CHARACTERISTICS

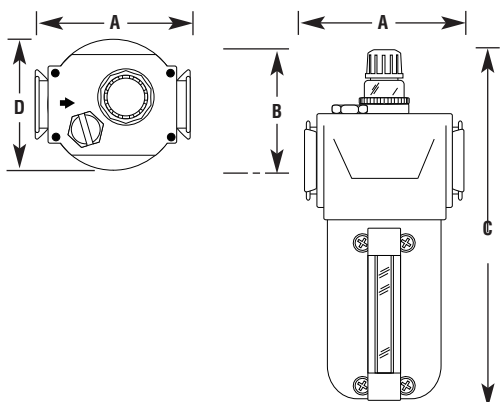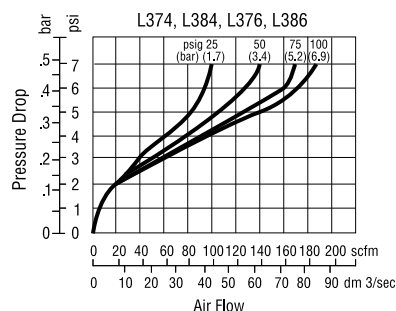

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/2"	L374W	142	10 oz.	3 3/4	2 5/16	8 13/32	3	2.4
1/2"	L384W	142	20 oz.	3 3/4	2 5/16	11 19/32	3	3.3
3/4"	L376W	142	10 oz.	3 3/4	2 5/16	8 13/32	3	2.4
3/4"	L386W	142	20 oz.	3 3/4	2 5/16	11 19/32	3	3.3

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.

Tri•Star Series 4 Ultrafog Lubricators

L4



OPTIONS

add suffix to part number in alpha order

- M** 6 oz. black coated metal bowl L454M
- W** 6 oz. black coated metal bowl with sight L454W

SPECIFICATIONS

WARNING! Polycarbonate plastic bowls could rupture if exposed to incompatible chemicals whether inside or outside the bowl. If such chemicals are present, use a metal bowl.

Body

- Black E coated aluminum

Polycarbonate Bowl with Bowl Guard

- Max. pressure 150 psig
- Operating temperature range 40°F to 125°F

Metal Bowl

- Zinc, black E coated
- Max. pressure 200 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Zinc, black E coated
- Max. pressure range 200 psig
- Operating temperature range 40°F to 160°F

Recommended Oil

- SAE 10 oil or lighter
- 2 scfm to establish drip rate
- Atomized average .6 micron
- 1 out of 28 drops travel downstream
- Cannot be filled under pressure

KITS

Bowl Kits

- Metal BKL45M
- Metal with sight BKL45W

Repair Kits

- Adjustment dome kit AK35
- Fill plug FK35
- For Ultrafog RKL452
- Sight kit WK45

Mounting Kit see page 64

- Mounting kit FBK5





Applications

- Multiple lubrication points

FEATURES

- 5 oz. polycarbonate bowl w/steel bowl guard
- Aluminum housing, black coated
- Oil delivery at low air flow approximately 2 scfm
- 3-position non-rising adjustment knob; push to lock, pull to adjust, detach for tamper resistant
- Convert on-line to Arrowfog with interchangeable module #RKL352
- In line modular installation

PERFORMANCE CHARACTERISTICS

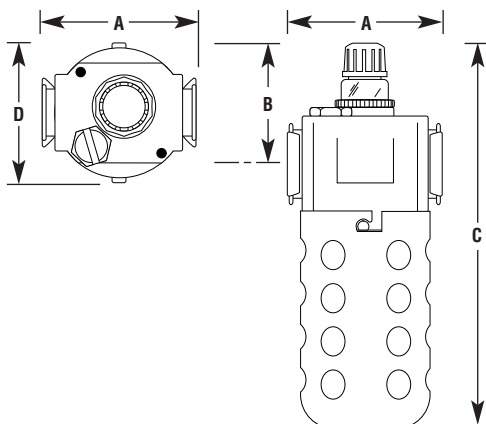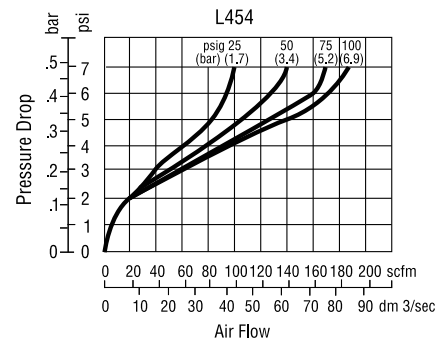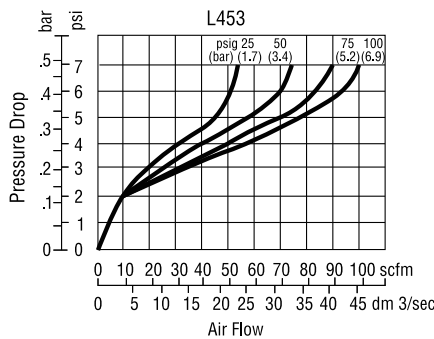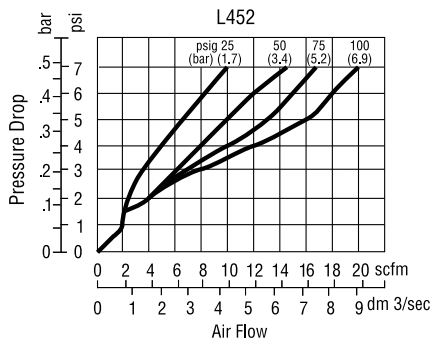

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/4"	L452	16	5 oz.	2 3/4	2 1/8	7"	2 1/2	1.0
3/8"	L453	82	5 oz.	2 3/4	2 1/8	7"	2 1/2	1.0
1/2"	L454	142	5 oz.	2 3/4	2 1/8	7"	2 1/2	1.0

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.

MidFlow Series 4 Ultrafog Lubricators

L4



SPECIFICATIONS

Body

- BlackE coated aluminum

Metal Bowl

- Zinc, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 125°F

Metal Bowl with Sight

- Zinc, black E coated
- Max. pressure range 200 psig
- Operating temperature range 40°F to 160°F

Recommended Oil

- SAE 10 oil or lighter
- 2 scfm to establish drip rate
- Atomized average .6 micron
- 1 out of 28 drops travel downstream
- Cannot be filled under pressure

KITS

Bowl Kits

- Metal bowl without sight BKL47M
- Metal bowl with sight BKL47W

Repair Kits

- For L470/L480 RKL482
- Dome kit AK37
- Fill plug kit FK47
- Sight kit WK57

Mounting Kit see page 64

- Mounting kit FBK7

FEATURES



- Aluminum housing
- Oil delivery at low air flow approximately 2 scfm
- 3-position non-rising adjustment knob; push to lock, pull to adjust, detach for tamper resistant
- Convert on-line to Arrowfog with interchangeable module #RKL372 or #RKL382

OPTIONS

add suffix to part number in alpha order

- M** 10 oz. black coated metal bowl L474**M**

PERFORMANCE CHARACTERISTICS

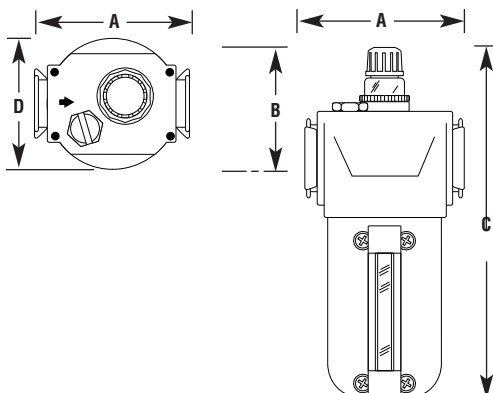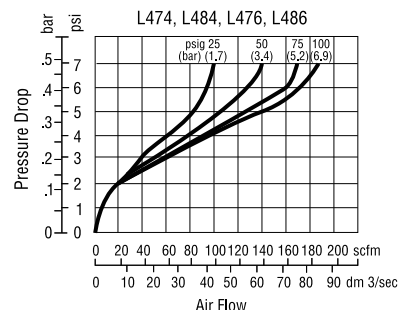

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/2"	L474W	142	10 oz.	3 3/4	2 5/16	8 13/32	3	2.4
1/2"	L484W	142	20 oz.	3 3/4	2 5/16	11 19/32	3	3.3
3/4"	L476W	142	10 oz.	3 3/4	2 5/16	8 13/32	3	2.4
3/4"	L486W	142	20 oz.	3 3/4	2 5/16	11 19/32	3	3.3

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.

Arrowick Lubricators



SPECIFICATIONS

Body

- Black E coated aluminum

Metal Bowl

- Steel, black E coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 160°F

Metal Bowl with Sight

- Steel, black E coated
- Max. supply pressure 250 psig
- Operating temperature range 40°F to 160°F

KITS

Bowl Kits

- 29 oz. metal BK4106M
- 29 oz. metal with sight BK4106W
- 60 oz. metal with sight BK4106LCM

Repair Kits

- For 4106, 4106LCM, 4108, and 4108LCM RK4106
- For 4112 and 4112LCM RK4112
- Sight kit WK35

Applications

- Single point
- Flow can be reversed

FEATURES

- Simple, trouble free design. It cannot be over-filled, and has greater bowl capacity which extends interval between filling
- Can be used downstream of 4 way valves because it accommodates reverse flow
- Bowl fills all the way to the top
- It can be filled under pressure no need to shut down air
- Tamper-proof internal adjustment
- Porous bronze oil metering diffuser introduces smallest possible oil particles to the air
- No small orifices to clog and stop oil delivery
- Automatically maintains air-oil ratio regardless of variations in air flow

OPTIONS

add suffix to part number in alpha order

W metal bowl w/sight glass . . 4108W

Recommended Oil

- SAE 10 oil or lighter



Droplet Size

- 3 micron or less

Minimum Air Flow for Lubrication

Model No.	Air Flow SCFM
4106	30 SCFM
4106LCM	30 SCFM
4108	30 SCFM
4108LCM	30 SCFM
4112	50 SCFM
4112LCM	50 SCFM

PERFORMANCE CHARACTERISTICS

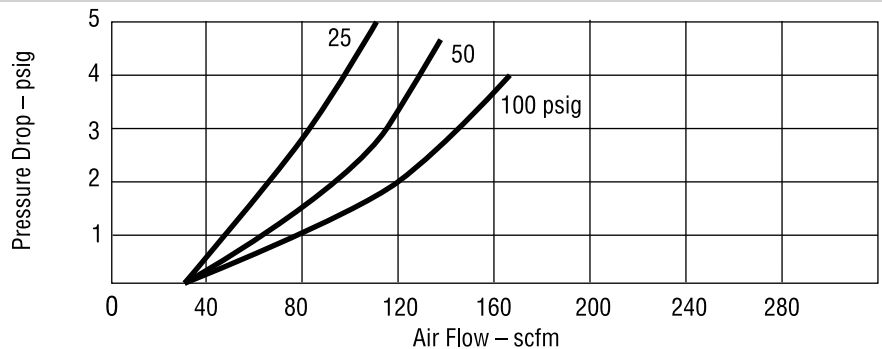

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)			WEIGHT (LBS.)
				A	B	C	
3/4"	4106	175	29 oz.	4 7/8	1 1/8	8 7/8	3.5
1"	4108	175	29 oz.	4 7/8	1 1/8	8 7/8	3.5
1 1/2"	4112	175	29 oz.	5 1/4	1 1/4	9	3.5
3/4"	4106LCM	175	60 oz.	4 7/8	1 1/8	13 1/2	6.0
1"	4108LCM	175	60 oz.	4 7/8	1 1/8	13 1/2	6.0
1 1/2"	4112LCM	175	60 oz..	5 1/4	1 1/4	13 1/2	6.0



* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.

Miniature Filter/Regulator/Lubricator Combinations



	PIPE SIZE	COMBINATION NUMBER	COMPONENTS			BOWL CAPACITY (OUNCES)	APPROX. DIMENSIONS			APPROX. WEIGHT (LBS.)
			FILTER	REGULATOR	DROP LUBE		A	B	C	
Miniature	1/8"	7681	F300-01	R161G	L181	1	5 1/4"	2"	6 1/2"	1.3
	1/4"	7682	F300-02	R162G	L182	1	5 1/4"	2"	6 1/2"	1.3
			FILTER/REGULATOR							
	1/8"	7621	B741G		L181	1	3 1/4"	2 3/16"	6 1/4"	1.1
	1/4"	7622	B742G		L182	1	3 1/4"	2 3/16"	6 1/4"	1.1

NOTE: Combinations with Regulators include gauge.
Combinations are boxed assembled.

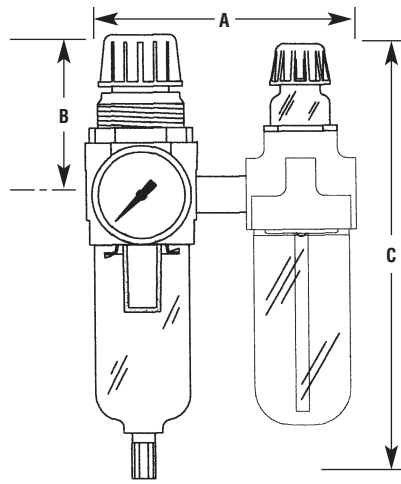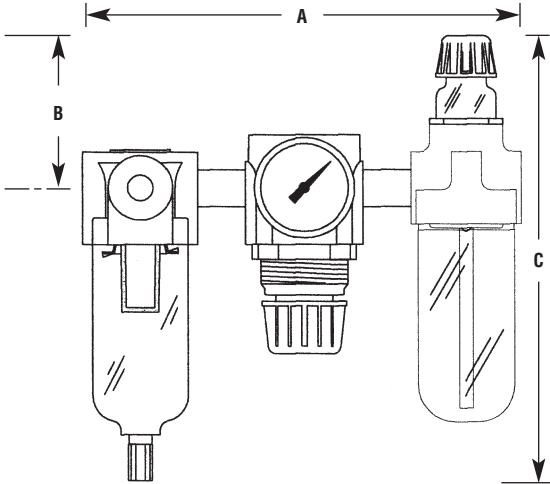


Tri•Star Modular Filter/Regulator/Lubricator Combinations






High Performance • Flexibility • Compact • Lightweight

- A screwdriver is the only tool needed to connect or disconnect units
- Insert interlocking feature allows simple installation in any location
- Installation or removal from one plane – without disturbing existing piping
- Regulator mounting can be either up or down
- Unique design allows side, top, individual and custom mounting
- Regulator and lubricator adjustments are made thru three position – tamper resistant adjusting knobs.
- Engineered to permit use with standard size pipe nipples
- Available in $\frac{1}{4}$ ", $\frac{3}{8}$ " and $\frac{1}{2}$ " pipe sizes and insert pipe sizes $\frac{1}{4}$ ", $\frac{3}{8}$ ", $\frac{1}{2}$ " and $\frac{3}{4}$ "
- Special optional diverter blocks supply air to secondary locations
- Unlimited adaptation to air preparation systems

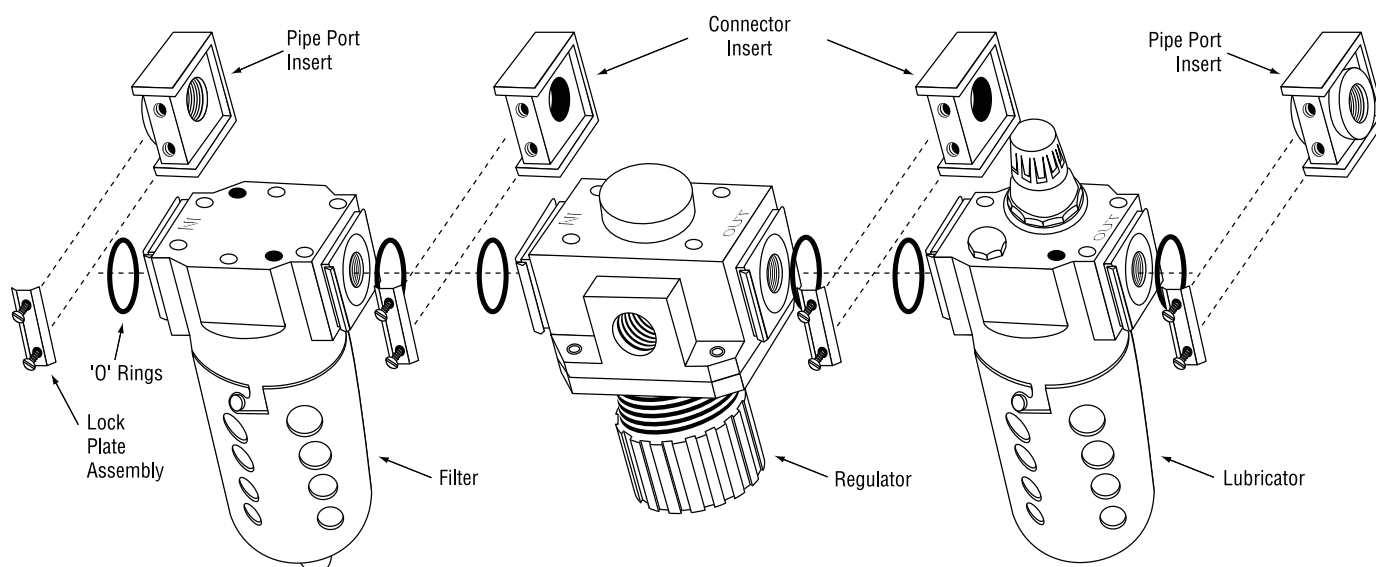

Tri•Star Filter/Regulator/Lubricator Combinations

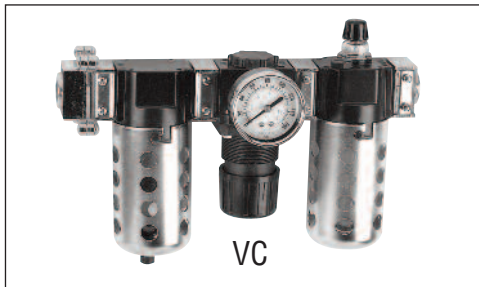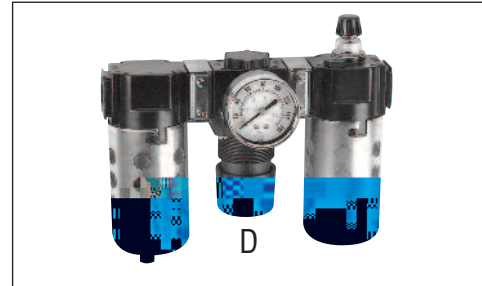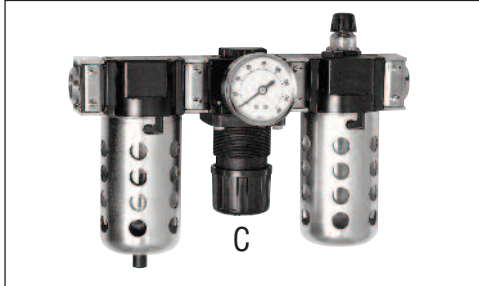


PIPE SIZE	STYLE	COMBINATION NUMBER*	COMPONENTS			BOWL CAPACITY (OUNCES)	APPROX. WEIGHT (LBS.)
			FILTER	REGULATOR	DROP LUBE		
1/4"	Tri•Star* (please reference chart below for further Tri•Star information)	33352	F352	R352G	L352	5	3.3
1/4"		33452	F352	R352G	L452	5	3.3
3/8"		33353	F353	R353G	L353	5	3.3
3/8"		33453	F353	R353G	L453	5	3.3
1/2"		33354	F354	R354G	L354	5	3.4
1/2"		33454	F354	R354G	L454	5	3.4
3/4"		*33356	F354	R354G	L454	5	3.4
	*not available with D option	FILTER/REGULATOR					
1/4"		70352	B752G		L352	5	3.0
3/8"		70353	B753G		L353	5	3.0
1/2"		70354	B754G		L354	5	4.1
3/4"		*70356	B754G		L354	5	4.1

NOTE: Combinations with Regulators include gauge. Combinations are boxed assembled.


STYLE	COMBINATION NUMBER					
	FILTER STYLE	REGULATOR STYLE	LUBRICATOR STYLE	SERIES	PIPE SIZE	
C – With End Port Inserts	0 – No Filter	0 – No Regulator	0 – No Lubricator	5 – 5 oz. Plastic Bowl or 6 oz. Metal Bowl M 6 oz. Metal Bowl with sight W	2 – 1/4"	
D – Without End Port Inserts	3 – Particulate	3 – Standard Relieving	3 – Arrowfog		3 – 3/8"	
VC – With OSHA Lockout	4 – .09 Micron Oil Removing		4 – Ultrafog		4 – 1/2"	
N – Nipple	5 – .03 Oilesceer				6 – 3/4"	
	6 – Vapor Removal					
	7 – Filter/Regulator					

► **VC3 Unit**

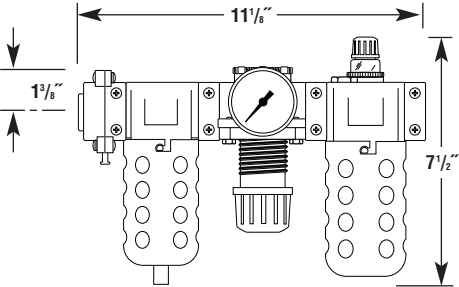


► **C3 Unit**


► **D3 Unit**

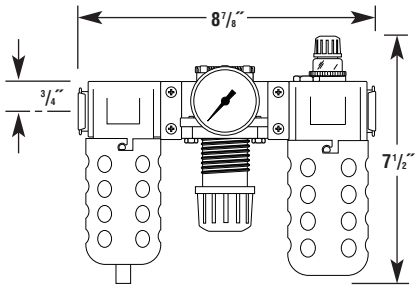


► **N3 Unit**

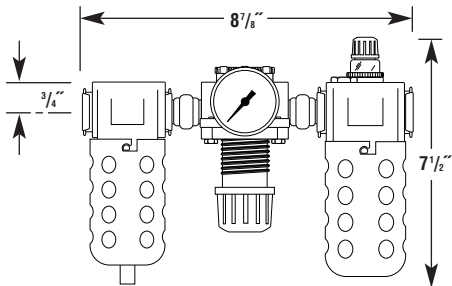

► **VC7 Unit**

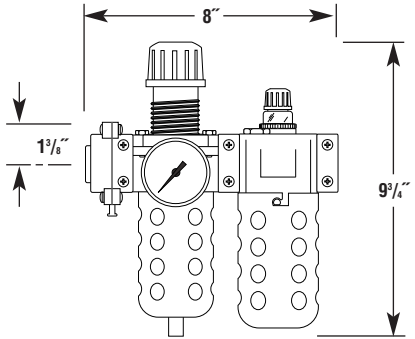


► **C7 Unit**

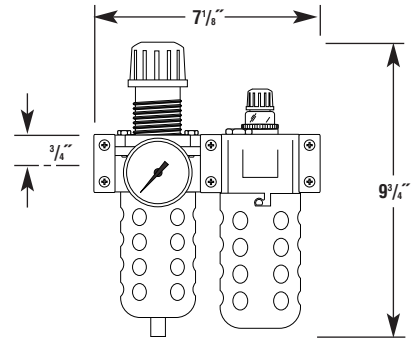

► **D7 Unit**


► **N7 Unit**

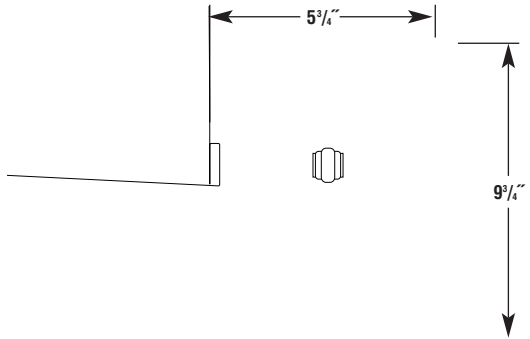

Tri•Star Inserts & Accessories

Tri•Star Outboard Diverter


The Tri•Star Outboard Diverter block attaches to the outlet port of any Tri•Star unit and allows air to be diverted to up to 3 1/4" outlets. Includes locking plate and "O" rings, and it will accept the Tri•Star mounting bracket.



Model No.	Description
DK54	1/4" NPT Outboard Diverter Kit

OSHA Lockout, 3-Way Valve


Arrow's 3-way OSHA lockout valve exhausts all downstream pressure when closed and can be locked in the closed position with customer supplied pad lock. These valves will handle all Tri•Star system air flows and will exhaust 6 scfm @ 100 psi.

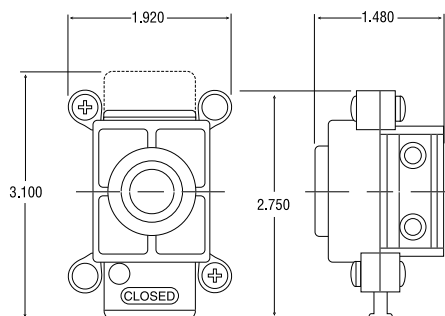

Model No.	Description
V252	1/4" OSHA Lockout Valve
V253	3/8" OSHA Lockout Valve
V254	1/2" OSHA Lockout Valve

Mounting Bracket


IBK5 wall mounting bracket for Modular Tri•Star FRL units permit bracket mounting from inlet and outlet ports, slide valve and diverter blocks

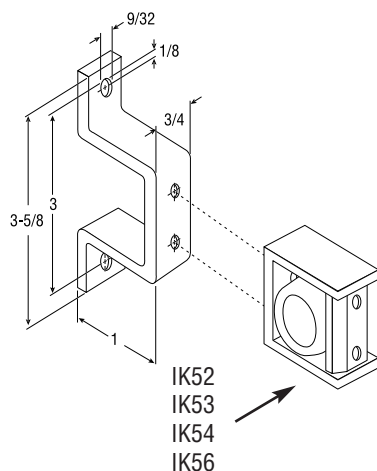

Modular Components & Accessories

Tri•Star Connector Insert


Tri•Star insert slides are designed to guide the insert to an interlocking position on the unit body. The design of the slide also provides a unique safety feature, should the insert plates be removed while the air line is under pressure, the interlocking slide will prevent blowing away.



Model No.	Description
IK50	Tri•Star Connector Insert

Tri•Star Pipe Port Insert


Any of four separate Tri•Star ports permit instant pipe sizing of every Tri•Star filter, regulator and lubricator. Available in 1/4", 3/8", 1/2", and 3/4" pipe sizes for inlets and outlet ports. Zinc diecast metal. A special Tri•Star locking design prevents backing out of lock plate screws and keeps the screws in place when the plate is removed.



Model No.	Description
IK05	"O" Rings for Modulares
IK52	1/4" NPT Pipe Port Insert
IK53	3/8" NPT Pipe Port Insert
IK54	1/2" NPT Pipe Port Insert
IK56	3/4" NPT Pipe Port Insert

Tri•Star Diverter

The unique Tri•Star diverter permits a portion of filtered air to be branched before entering the regulator and sends it to another location; or when installed after the regulator, it will divert a portion of regulated air. The diverter is also used when pressure drop readings are required.

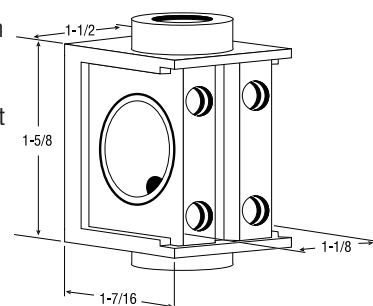

Model No.	Description
DK52	1/4" NPT Inboard Diverter Kit
DK53	3/8" NPT Inboard Diverter Kit





IN-LINE DESICCANT DRYER

The compressed air flow path through the dryer assures desiccant packing and maximum utilization of the desiccant's adsorption qualities. The compressed air enters the dryer (1) and is dispersed through a 70 micron polypropylene element (2) for the removal of particles. The air is then distributed uniformly through the full desiccant bed (3) to the bottom of the intake tube (4). The intake tube is protected by a 40 micron porous bronze element (5). As the desiccant adsorbs moisture, a dramatic and highly visible color change from dark blue to light pink is evident. The color change works its way through the desiccant as the adsorptive qualities of the desiccant are diminished. Once the color change is visible through the exclusive sight dome (6), the full desiccant bed has reached its maximum drying capacity and must be either changed or regenerated. Dry air exits through the inside diameter of the intake tube (7) and out the outlet port of the unit (8).


ADSORPTION

Adsorption means the attraction of a substance – the adsorbate – to, and its subsequent accumulation on, the surface of a solid material – the adsorbant – which is caused by physical forces of attraction. Adsorbants are substances which are permeated by a large number of very fine pores which give rise to a large internal surface area. This, in turn, determines the adsorption capacity of the adsorbant, since a large internal surface can accommodate more adsorbate. Other factors which influence the amount of adsorbate are: temperature, relative humidity and pressure.

REGENERATION PROCESS

Regeneration is accomplished by heating the desiccant to a temperature of 275°F in a drying oven. Regeneration is complete when the desiccant returns to its blue color.

For extended life and protection of the desiccant and equipment being serviced, an F3 Prefilter and F5 Coalescing filter should be used as a prefiltering system ahead of the dryer.

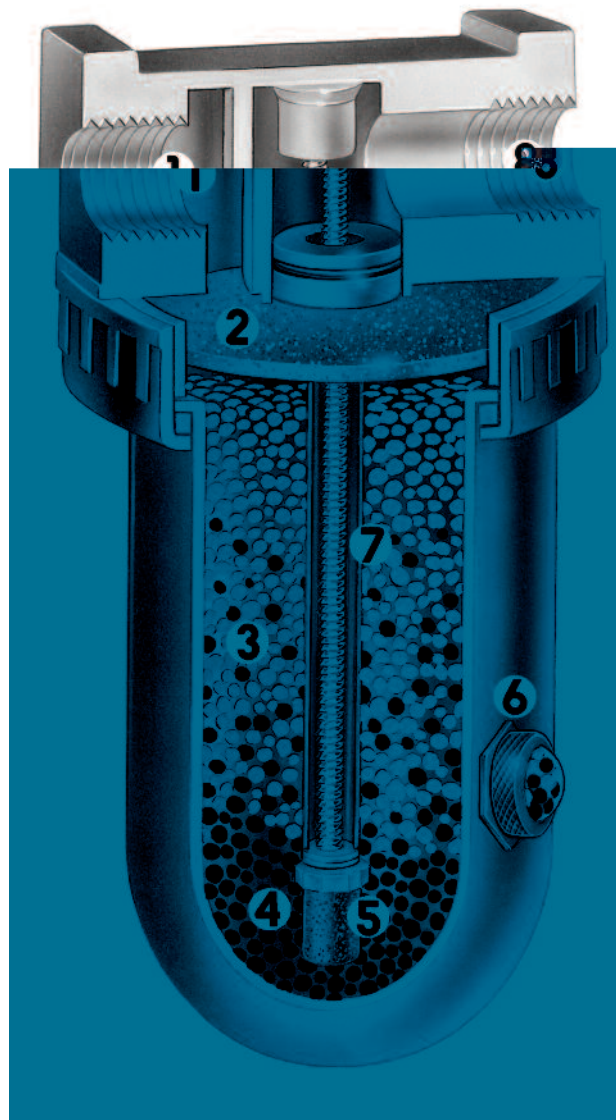

In-Line Desiccant Dryer



D05-04



D10-04



D25-06

FEATURES

- Available in capacities from .5 to 50 scfm
- Compact sizes are ideal for portable or original equipment
- Drying efficiency can be tailored to your needs down to -30°F pressure dew point
- Highly visible color change from blue to pink through exclusive sight-glass highlights the need for service
- Exclusive hard spherical bead resists attrition and dusting and can be recharged
- Exclusive intake flow design takes air through entire supply of desiccant for maximum drying capacity
- Built-in particulate after-filter prevents downstream dust
- Needs no electrical connection
- No "purge air" lost as with regenerative dryers

SPECIFICATIONS

Bowl

- D05-03: Metal with sight gauge
- D10 & D 25: Metal with sight gauge
- D10-04XL: Metal with sight gauge

Bowl Kits

- BKD05W-1
- BKD10
- BKD10XL
- BKD25

Desiccant

- Silica gel

Maximum Pressure

- 250 psig

Operating Temperature Range

- 0°F to 120°F

APPLICATIONS

- Always install an F5 coalescing filter upstream of the D05, D10 & D25
- For compressed air service only
- Not to be used on life support systems or breathing air systems
- Dry air for parts blowoff
- Paint spray systems
- Air gauging equipment
- Laboratory air

KITS

Replacement Desiccant

No. 34189 – 6 pack of 1 qt. jars

No. 34417 – 4-1 gallon jugs

Bracket Mounting Kit - DBK10 see pg. 64

Check the exhaust element to avoid high pressure drop due to desiccant dust entrapment. We recommend replacement of the exhaust element.



D05, D10 Use:

Element Kit EKD10 (1-pack each)

D10XL Use

Element Kit EKD10XL (1-pack each)

D25 Use: Element Kit EKD25 (1-pack each)

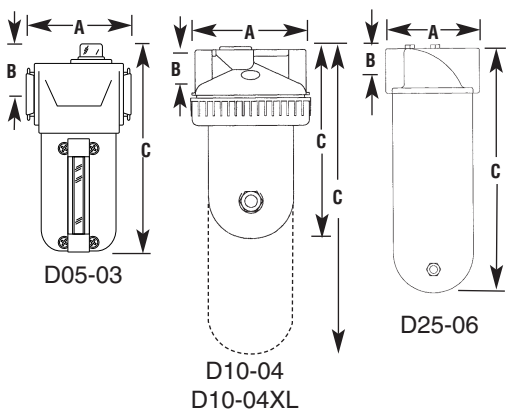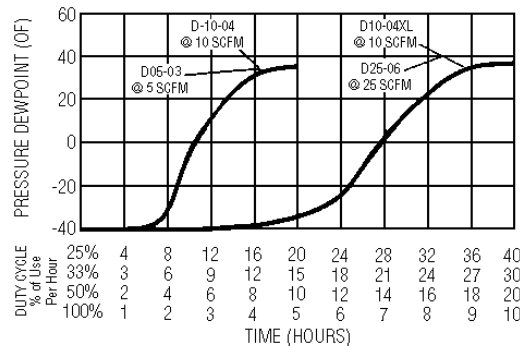

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	MAX. FLOW SCF*	DESICCANT WEIGHT (LBS.)	DESICCANT CHARGE	DIMENSIONS (INCHES)			WEIGHT (LBS.)
						A	B	C	
1/2"	D05-04	.5 to 5	830	5/8	10 oz.	3 3/4	1 1/8	8 1/4	2.7
1/2"	D10-04	5 to 15	2500	1 1/4	1 Qt.	4 7/8	1 1/8	8 7/8	5
1/2"	D10-04XL	15 to 25	5000	2 1/2	2 Qt.	4 7/8	1 1/8	13 1/2	7
3/4"	D25-06	25 to 50	12500	6	1 Gal.	6 3/4	2	17 3/4	23

* SCFM and SCF based on 70°F inlet temp. @ 100 psig



- The StageAir Drying System is a point-of-use drying system and is protected by an OSHA Lockout valve which exhausts all downstream pressure when closed, and can be locked in the closed position with customer supplied padlock, exhaust 6 SCFM at 100 PSIG to prevent element damage.

Note: When pressurizing, open slide valve slowly to prevent element burst.

StageAir Drying System

HOW IT WORKS

FIRST AND SECOND STAGE

- The StageAir desiccant air drying system begins with the dual stage integral filter/regulator
- First, the air enters the particulate filter, which has a 5 micron cleanable sintered bronze element. In this stage, corrosive moisture, pipe scale, dirt and rust are removed from the air line protecting the precision parts in the regulator.
- Next, the air enters a high-performance regulator, which reduces primary pressure to a desired pressure setting.

THIRD STAGE COALESCING FILTER

- During Stage 3, fine filtration takes place. Here, 99.99 percent of oil aerosols and microscopic particles down to .01 micron absolute are removed from the air. The pop-up indicator alerts customer that an element change is necessary.

FOURTH STAGE DESICCANT AIR DRYER

- As the air enters the desiccant dryer, it is dispersed through a 70 micron element. The element distributes air evenly through the desiccant bed. The desiccant absorbs the water vapor from the air, producing a -40°F pressure dew point.
- To remove traces of desiccant dust before the air leaves the system, the air passes through a 40 micron filter element. The air is now clean and dry, and has been properly treated for use with your air operated system.
- The clear indicator sight glass shows a color change in the desiccant from blue to pink which indicates a desiccant recharge.

OPTIONS

To order options for the VC7500 series, simply add the appropriate suffix, as listed below, to the part number in the alphabetical/numerical order.

- 3** 3 micron absolute element (particulate filter)
- F** Float drain
- J** Overnight Drain

KITS

- Internal Float Drain5200
- Element Kits**
- 5 micronEK35-5
- .01 micronEK55A

Desiccant Kit


- 6-Pk. of 1 Qt. Jars34189
- 4 - 1 Gal. Jugs34417

Mounting Kit see page 64

- Mounting kit ABK-10

Applications

- Paint Spray
- Air Gauging Equipment
- Lab Air


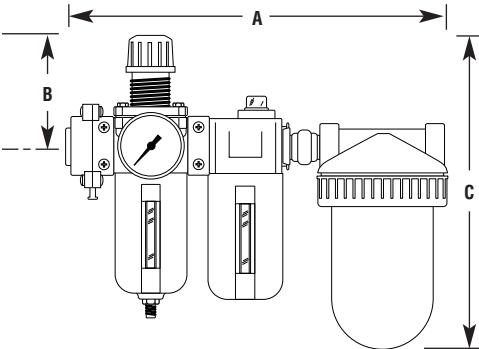


DIMENSIONS								
PIPE SIZE	MODEL NO.	MAX. FLOW		DESICCANT WEIGHT (LBS.)	DIMENSIONS (INCHES)			WEIGHT (LBS.)
		SCFM*	SCF*		A	B	C	
1/2"	VC7510	5 to 15	2,500	1 1/4	14 1/4	4	11 1/4	10
1/2"	VC7510XL	15 to 25	5,000	2 1/2	14 1/4	4	16 1/4	13.5
3/4"	VC7525	25 to 50	12,500	6	16 1/2	4	20 7/8	24.25

* SCFM and SCF based on 70°F inlet temp. @ 100 psig

ACCESSORIES

Economatic Drains

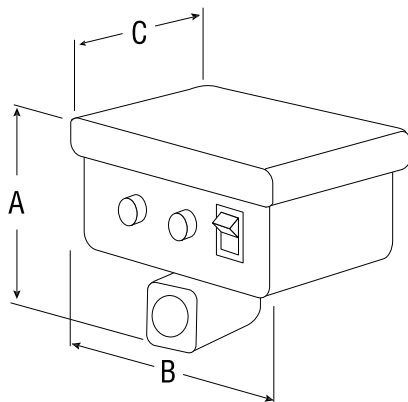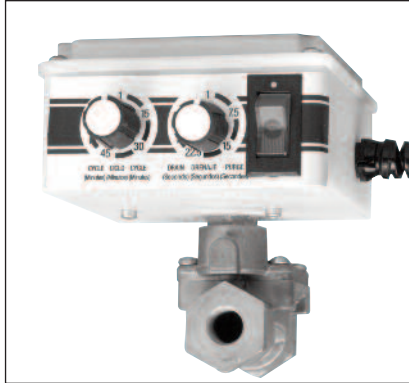

Arrow developed the **heavy duty** ECONOMATIC drain valve to be a low cost answer to leaking, clogging, noise and other problems caused by float-type drains.

A solenoid controlled by a solid state timer opens and closes the ECONOMATIC drain valve in 1 to 60 minute cycle times and 1 to 30 second blow down times. Both times are individually adjusted.

The drain is designed with a manual override switch with indicator light.

ECONOMATIC drains also feature a spring loaded softseat solenoid which eliminates valve noise and assures leak-proof shutoff.

Installation of the drain is simple and quick – thread on and plug in.

SPECIFICATIONS

Adjustable Cycle Time

- 1-60 minutes

Adjustable Drain Time

- 1-30 seconds

Maximum Working Pressure

- 200 psig

Maximum Fluid Temperature

- +165°F
- NEMA one enclosure
- Voltage: 115V / 1 ph / 60Hz
- 0.25 amps
- Buna-N seals
- 6 heavy duty grounded power plug

Purge Rate

- 16 scfm open flow @ 100 psig


Mounting Kit see page 64

- Mounting kit BR5702
- Timer kit TK5700

DIMENSIONS

Model No.	Connection NPT	Dimensions (inches)			Weight
		A	B	C	
5702S	1/4"	3 1/4"	3 15/16"	4 3/16"	1.365
5704S	1/2"	4 1/16"	3 15/16"	4 3/16"	1.745

Y Strainer – furnished with each Economatic Drain



A Y Strainer installed ahead of an external drain, traps large debris and sludge; prevents malfunctions and extends the life of automatic drains.

FEATURES

- Cast brass manufactured in the U.S.
- 300 psi maximum working pressure
- 50 mesh stainless steel screen can be cleaned or replaced without removal of strainer from the line
- 3/8" removable plug for quick draining

DIMENSIONS

Model No.	Connection NPT	Dimensions (inches)			Weight
		A	B	C	
S202	1/4"	1 5/32"	2 27/64"	2 11/16"	10.5 oz.
S204	1/2"	1 1/16"	2 5/8"	2 11/16"	12 oz.

Accessories

► Slide Valve

Arrow's new slide valve is a 3 way OSHA lockout valve which exhausts all downstream pressure when closed, and can be locked in the closed position with customer supplied padlock.

3-Way Slide Valves (Open or close and exhaust) Meet O.S.H.A. Lockout Standard 29CFR 1910.147 - The 3-way slide valve is for use in the main line, upstream of equipment. When closed, it shuts off the upstream air and exhausts the downstream air.


Body is black coated zinc. Slide is 5% Teflon, high-impact, safety yellow plastic. Seals are pre-lubricated Buna O-rings. Screws are black coated steel.

Maximum operating pressure: 250 PSIG

Maximum operating flow: 140 SCFM

Operating temperatures: 35°F to 150°F

Exhaust bleed at 100 PSI: 7 SCFM

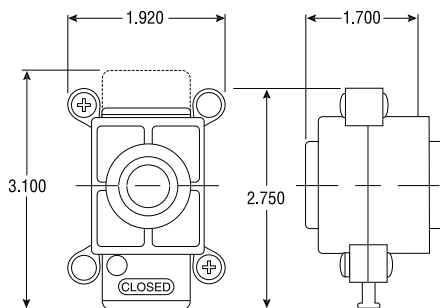

Valve Type	Standard Line With Threaded Ports	
	Model	Port Size
3 Way	V202	1/4"
OSHA Lockout Valve	V203	3/8"
Customer to Supply Lock	V204	1/2"

► Mini In-Line Desiccant Dryer (-30°F Dew Point)

Used at the point-of-use, this **patented**, disposable, mini in-line desiccant dryer removes all traces of water vapor, oil vapor and dirt. It is often used directly upstream of blow guns or spray guns as final protection for critical parts blow off and paint spraying. Install in either direction; it functions in both directions. A 40 micron, porous bronze element removes fine dirt particles, an oil removing media removes oil vapor, and desiccant beads adsorb water vapor. The see-through housing shows desiccant color change, which indicates that the dryer needs to be replaced.

SPECIFICATIONS

Housing

- Polycarbonate material allows clear desiccant visibility

Guard

- Nylon guard

Maximum Flow Capacity: 15 scfm

Maximum Pressure: 125 psi

Maximum Temperature: 130° F

APPLICATIONS

- Parts blow off
- Paint guns

NON-METALLIC MATERIAL IS HIGHLY
RESISTANT TO CHEMICALS

SEE THROUGH HOUSING
SHOWS COLOR CHANGE WHEN
DRYER NEEDS REPLACEMENT




Connection NPT/FPT	Model No.	Dimensions (Inches)		Weight
		A	B	
1/4"	DFD-10	3 3/4"	1 11/16"	2.8 oz.

Accessories

► T53 Automatic Drain



The T53 series float type drain is provided with a top threaded port. This drain features a protective stainless steel screen with an umbrella baffle, providing a large sump area for oil sludge and dirt. It is used to give continued performance and low maintenance to drain accumulated water and oil from drain lines, receiver tanks, condensate drop legs and filters.

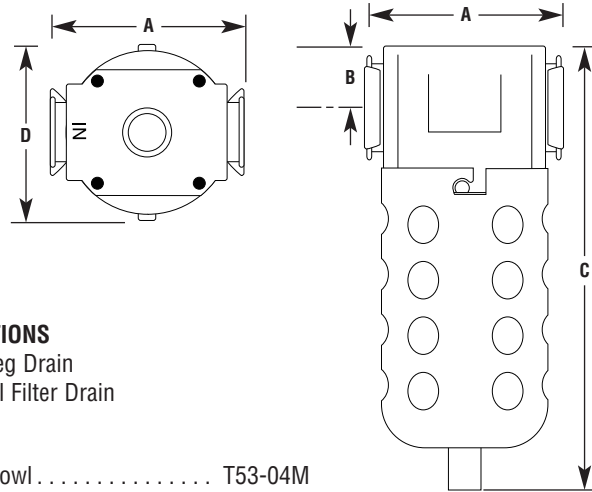

APPLICATIONS

- Drop Leg Drain
- External Filter Drain

OPTIONS

M Metal bowl T53-04M
W Metal bowl with sight. T53-04W


DIMENSIONS

Model No.	Connection FPT	Dimensions (INCHES)				Weight (lbs.)
		A	B	C	D	
T53-02	1/4"	2 3/4	3 1/4	6 1/2	2 1/4	1.0
T53-04	1/2"	2 3/4	3 1/4	6 1/2	2 1/4	1.0

SPECIFICATIONS


Bowl	Pressure Range	Temperature Range
Plastic	30-150 psi	40°F to 120°F
Metal	30-175 psi	40°F to 120°F

Internal Float Drain - 5200



Automatically drains collected liquids when internal float indicates accumulation. Saves air loss. For standard size filter.

Overnight Bowl Drains



Arrow's Automatic Overnight drain operates when a compressed air system is shut down. It clears accumulated condensate from a filter bowl when pressure falls to 3 psig or less. Available for either plastic or metal bowls.


Model J - For plastic bowls - push to manually drain
Model K - For metal bowls - twist to manually drain

Kit Ordering #
 32008
 CKFK

Accessories

High Pressure/Chemical Resistant

► T54W Compact Zero Loss Drain

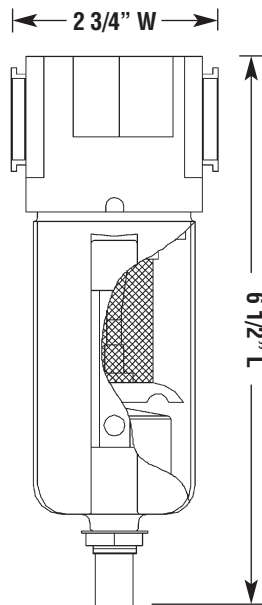

P/N T54W 1/2" FPT

Max. Press. 250 PSIG

Max. Temp. 130°F

Features

- Compact design 6 1/2" L X 2 3/4" W
- 50 mesh s/s screen to protect float from solid chips
- Plastic float and housing compatible with most compressor oils.
- Metal filter housing with sight glass has a 1/2" FPT top connection.

Applications

For use in removing liquid water and oil from receiver tanks, separators, large filters and other areas where liquid condensation occurs in a compressed air system.

► DKTF4W O.S.H.A. Lockout Slide Valve & Zero Loss Drain



P/N DKTF4W 1/2" NPT

Arrow has combined two outstanding products. Our 1/2" O.S.H.A. Lockout 3-Way Slide Valve and Compact Zero Loss Drain allows the drain to be serviced without interruption of compressed air usage.

Max. Press. 250 PSIG


Max. Temp. 130°F

Features


- 3 way slide: when closed, the compressed air vents out of the drain housing allowing removal of the drain for servicing.
- The slide provides a pad lock hole in the closed position which meets O.S.H.A. lockout requirements.
- When drain servicing is complete, the slide valve is pushed to the open position with no interruption off compressed air service.

Accessories

E291, E292

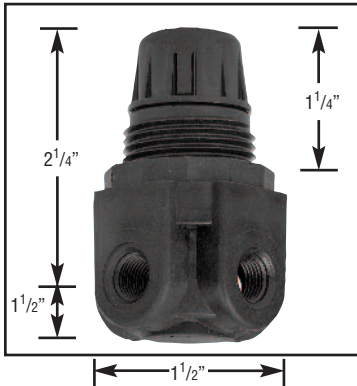

E191, E192

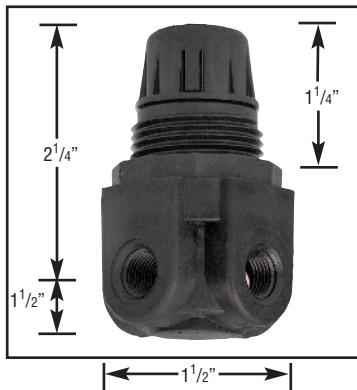

Miniature Relief Valves

Miniature, diaphragm operated relief valves with exceptional sensitivity. Ideally suited for applications requiring gradual proportional relief. 3 position knob pushes to lock and can be removed for tamper resistance.

Ordering Information

Pipe Size	Model No.	Description
1/8"	E291	All Plastic non-corrosive parts.
1/4"	E292	
1/8"	E191	Die cast black coated body, brass seat. Buna N Diaphragm
1/4"	E192	

Specifications

- E291, E191 all 1/8" ports
- E292, E192 1/4" ports
- With 1/8" gauge ports
- Maximum Pressure Range**
- 150 PSI

Options

- B - 2-Position Mechanical Lockout Knob
- G - Gauge (0-160 psi)
- I - Instrumentation pressure, 1 - 15 psig
- Maximum Temperature Range**
- 40°F to 120°F
- L - low pressure 0 - 50 psig
- P - panel mount nut
- U - No Gauge Ports
- V - All 1/4" Ports (4)

Air Relief Capacity - SCFM

Range (psig)	Instrumentation Spring Range 1 to 15		Low Pressure Spring Range 15 to 30		Standard Pressure Spring Range 50 to 125	
Set Pressure (psig)	5.0	10.0	20.0	40.0	60.0	80.0
Rated Flow @ 10%*	.1	.3	.5	4.0	.2	5.5
Rated Flow @ 20%*	.3	.7	2.8	15.0	6.5	14.0
Rated Flow @ 30%	.5	2.3	6.8	25.0	15.0	23.0

Reseat @ $\pm 1\%$ of Set Pressure

- 1) Rated flows in SCFM are taken at percentage of pressure over set pressure.
- 2) The relief valve will not function as a pressure regulator - excess pressure must be vented to atmosphere.

PRESSURE SWITCH

The PDA4 pressure switch can be installed anywhere in a pneumatic or hydraulic system. It is often used to protect air compressors and pneumatically operated equipment from damage caused by over-pressurization. The unit can be set in a normally open or closed position in an adjustable actuation range from 25 PSIG to 95 PSIG with $\pm 2\%$ repeatability. The pressure switch has standard 18" wire leads of 300 V, 22 SWG. For simple installation, thread the unit into the gauge port of a regulator or pipe tee.

Construction: Zinc die cast and plastic housing, and NEMA 13 electrical enclosure which is U.L. approved.

Max. operating pressure: 300 PSI

Operating temperatures: 35°F to 180°F

Part No.	NPT	Overall Length	Dia.	Wt. Lbs.	Voltage	Inductive	Resistive
PDA4	1/4"	1 5/8"	1 1/8"	.25	125/150/VAC	5 AMP	7 AMP

Standard Electrical Circuit


Wire Color	Circuit
Black	Common
Green	Normally Closed
Red	Normally Open

Note: 20% differential for reset, and 1% repeatability when operated within recommended conditions.



Pressure Gauges & Accessories

Delta 'P' Gauge

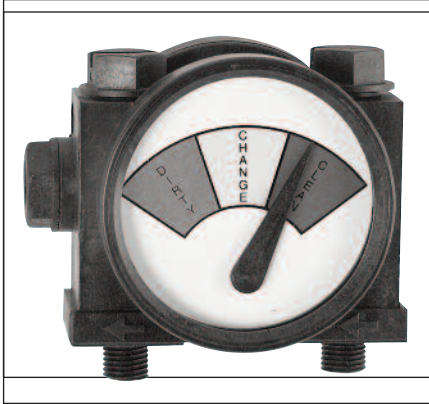

Reed Switch Specifications			
Max. Voltage Switching	Max Switch Current	Max. Carrying Current	Contact Rating
100 AC/DC	.30 AMPS	1 AMP	10 VA

FUNCTION

Allows exact determination of pressure drop across element. Divided into three sections, each marked for easy understanding. The differential pressure gauge is the best tool available for determining element maintenance requirements.

Color	Indicates	Pressure Drop
Green	Clean	0-6 psi
Yellow	Change	6-9 psi
Red	Dirty	9-12 psi

Maximum Pressure:

- 300 psig / 20 bar

Maximum Temperature:

- 200° F / 93° C

Weight:

- .33 Lb. / 1.5 Kg

Bolt Threads:

- 3/8 -24 Inches

Bolt Material:

- Glass filled Nylon

GAUGE MODELS

- DP-10A
Replacement unit only
Basic model with 3/8-24 slotted bolts
- DP-10B
Gauge with Remote Mounting Block

KITS AND ACCESSORIES


- MK-10
Mounting Kit for vertical or wall mounting
- TK-10
1/4" Tubing Kit with Connector Fittings

* Model No. DP10-A to mount directly on existing filter head for replacement only.

** Model No. DP10-B remote model with slotted bolts & mounting block.

Note: To order pre-mounted units, adds suffix "D" to filter #.

Pressure Gauges

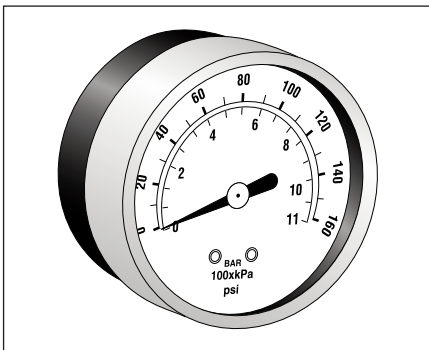


PART NO.	DESCRIPTION	PRESSURE RANGE	USED ON
1481C	2" face, 1/4" center back mount	0-30 psi	Tri•Star Tri•Star II High Flow
1481A	2" face, 1/4" center back mount	0-60 psi	
1481	2" face, 1/4" center back mount	0-160 psi	
1481B	2" face, 1/4" center back mount	0-300 psi	
1681C	1 1/2" face, 1/8" center back mount	0-30 psi	Mini Regulators and Mini Integral
1681A	1 1/2" face, 1/8" center back mount	0-60 psi	
1681	1 1/2" face, 1/8" center back mount	0-160 psi	


Regulator Accessories

Arrow regulators may be panel mounted to improve machine design and overall appearance, they are convenient for control panel or console mounting.

Suffix Q Tri-Star & Midflow




Suffix P Tri-Star & Midflow



Panel Mounting Regulators



Regulator Model	Suffix for Panel Mt.	Panel Hole Size	Dimensions & Max.		
			A	B	C
Tri-Star & Midflow Series	P	1 13/16"	1 1/4"	2 22/32"	1 1/2"
Tri-Star & Midflow Series	Q	9/16"	3 1/2"	2 23/32"	5/16"

Brackets



 $\frac{7}{32} \times \frac{3}{8}$ ✓

R161	R261	7681	741
R162	R262	7682	742
		7621	
		7622	

BR5702 Bracket

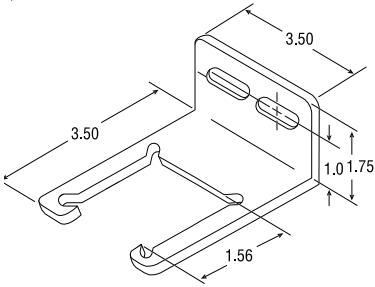

Mounting bracket for Tri•Star, Midflow, and precision regulators listed below. Also can be used for Tri-Star FRL Combination units.

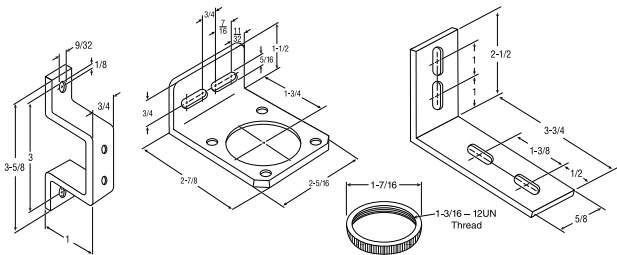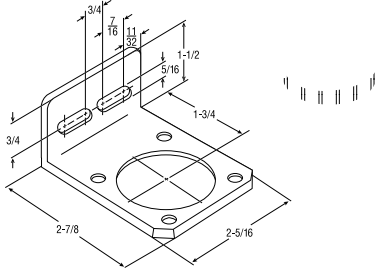

Fluid Power Date Codes

MONTH	CODE	YEAR	CODE
JANUARY	A	1995	R
FEBRUARY	B	1996	S
MARCH	C	1997	T
APRIL	D	1998	U
MAY	E	1999	V
JUNE	F	2000	W
JULY	G	2001	X
AUGUST	H	2002	Y
SEPTEMBER	I	2003	Z
OCTOBER	J	2004	A
NOVEMBER	K	2005	B
DECEMBER	L	2006	C
		2007	D
		2008	E
		2009	F

EXAMPLE:

F352W AU - January 1998

Arrow Pneumatics, Inc. Warranty Policy

LIMITED WARRANTY - Arrow Pneumatics warrants each Fluid Power Product against defects in material and workmanship for a period of one year from the date of original shipment. In the event of such defects within the warranty period, the Company will, at its option, replace or recondition the product without charge. This shall constitute the exclusive remedy for breach of warranty and the Company shall not be responsible for any incidental or consequential damages, including, without limitation Damages or other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse air conditions, chemicals, or any other circumstances over which the Company has no control. This warranty shall be invalidated by any abuse, misuse, misapplication or improper installation of the product.

THE COMPANY MAKES NO OTHER WARRANTY. ALL OTHER WARRANTIES, ORAL OR WRITTEN, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A SPECIFIC PURPOSE, ARE HEREBY EXCLUDED AND DISCLAIMED.

The liability of the Company for all loss or damage resulting from nonconforming goods or tender, including breach of any and all warranties, shall be limited to a refund of the purchase of the particular goods to which the loss or damage occurred.



Arrow Pneumatics

Distributed By:

Arrow Pneumatics, Inc. • 2111 West 21st Street • Broadview, Illinois 60155-4627
708.343.9595 voice • 708.343.1907 fax • www.arrowpneumatics.com