



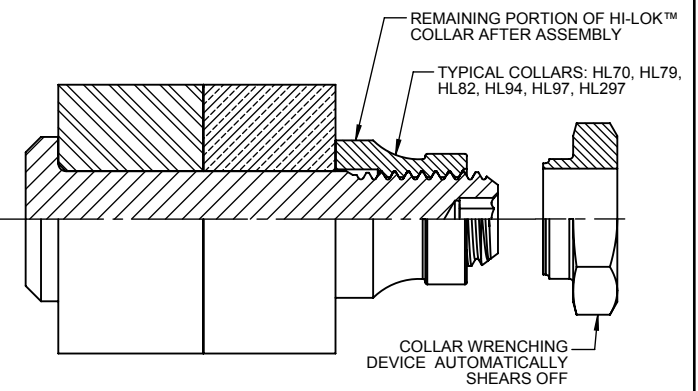

hi-shear corporation
2600 SKYPARK DRIVE, TORRANCE, CALIFORNIA 90509 U.S.A.

HI-SHEAR Corporation, USA Design Holder CAGE No. 73197
a LISI AEROSPACE Company

For the current list of licensed manufacturers, please visit the LISI AEROSPACE website at:
[HTTP://WWW.LISI-AEROSPACE.COM/LICENSES](http://www.lisi-aerospace.com/licenses)

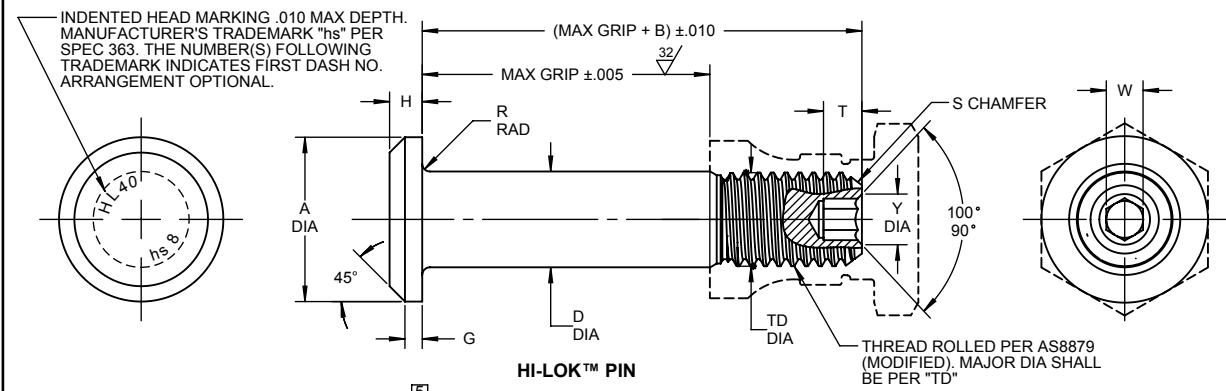

HI-LOK™ PIN AND COLLAR AFTER ASSEMBLY

SEE COLLAR STANDARDS FOR COLLAR STRENGTHS. LOWER STRENGTH (PIN OR COLLAR) DETERMINES SYSTEM STRENGTH

FIRST DASH NO.	PIN NOM DIA	A DIA	B REF	D DIA		TD DIA	G REF	H	R RAD	S CHAMFER REF	THREAD MODIFIED	SOCKET			DOUBLE SHEAR POUNDS MINIMUM	TENSION POUNDS MINIMUM
				BEFORE SOLID FILM LUBE	AFTER SOLID FILM LUBE							W HEX	T DEPTH	Y DIA		
4	1/8	.240 .225	.294	.1375 .1370	.1375 .1365	.1335 .1310	.020	.042 .032	.020 .010	1/32 x 45°	.1380-32 UNJC-3A	.0645 .0635	.100 .085	[7]	2,840	1,350
5	5/32	.262 .242	.312	.1635 .1630	.1635 .1625	.1595 .1570	.020	.047 .037	.025 .015	1/32 x 45°	.1640-32 UNJC-3A	.0801 .0791	.135 .115	[7]	4,010	1,940
6	3/16	.315 .295	.325	.1895 .1890	.1895 .1885	.1840 .1810	.025	.055 .045	.025 .015	1/32 x 45°	.1900-32 UNJF-3A	.0806 .0791	.135 .115	.119 .104	5,380	2,500
8	1/4	.412 .387	.395	.2495 .2490	.2495 .2485	.2440 .2410	.030	.069 .059	.025 .015	1/32 x 45°	.2500-28 UNJF-3A	.0967 .0947	.150 .130	.142 .122	9,300	4,300
10	5/16	.505 .475	.500	.3120 .3115	.3120 .3110	.3060 .3020	.035	.078 .068	.030 .020	3/64 x 45°	.3125-24 UNJF-3A	.1295 .1270	.170 .150	.180 .160	14,600	6,300
12	3/8	.600 .565	.545	.3745 .3740	.3745 .3735	.3680 .3640	.040	.088 .078	.030 .020	3/64 x 45°	.3750-24 UNJF-3A	.1617 .1582	.200 .180	.217 .197	21,000	8,700
14	7/16	.676 .641	.635	.4370 .4365	.4370 .4360	.4310 .4260	.045	.105 .093	.030 .020	3/64 x 45°	.4375-20 UNJF-3A	.1930 .1895	.230 .210	.253 .233	28,600	12,100
16	1/2	.770 .735	.685	.4995 .4990	.4995 .4985	.4930 .4880	.050	.115 .103	.030 .020	3/64 x 45°	.5000-20 UNJF-3A	.2242 .2207	.260 .240	.289 .269	37,300	15,300
18	9/16	.864 .829	.770	.5615 .5610	.5615 .5605	.5550 .5500	.055	.127 .112	.040 .025	1/16 x 45°	.5625-18 UNJF-3A	.2555 .2520	.290 .270	.326 .306	47,200	19,000
20	5/8	.953 .918	.825	.6240 .6235	.6240 .6230	.6180 .6120	.060	.137 .122	.040 .025	1/16 x 45°	.6250-18 UNJF-3A	.2555 .2520	.330 .305	.326 .306	58,300	23,000
24	3/4	1.108 1.066	1.050	.7490 .7485	.7490 .7480	.7430 .7370	.070	.151 .136	.045 .030	1/16 x 45°	.7500-16 UNJF-3A	.3185 .3150	.395 .365	.398 .378	83,900	30,700

- GENERAL NOTES:**
1. Concentricity: "A" to "D" diameter within .010 FIM.
 2. Dimensions are in inches and to be met after finish and before application of solid film lubricant.
 3. Surface texture per ASME B46.1.
 4. Hole preparation per NAS618.
 5. Maximum "D" diameter may be increased by .0002 to allow for solid film application.
 6. Broach petals removed.
 7. Evidence of broken edge across points.
 8. Non-lubed pins must be used with lubed collars or wet sealant.
 9. Use HL140 for oversize replacement.

- SPECIFICATION:** HI-LOK™ Product Specification 342.
- CODE:** First dash number indicates nominal diameter in 1/32nds. Second dash number indicates maximum grip in 1/16ths. See Finish note for explanation of code letters.
- HOW TO ORDER**
- EXAMPLE: Pin Part Number HL40DU8-8
- 8/16 or 1/2 Maximum Grip Length
 - 8/32 or 1/4 Nominal Diameter Pin
 - Finish Code
 - Pin Basic Part Number

MATERIAL: A-286 high temperature alloy per AMS5737 or AMS5731.

HEAT TREAT: 95,000 psi shear minimum at 70°F.

FINISH: HL40(-)(-) = Passivate per Hi-Shear Spec. 258 and cetyl alcohol lube per Hi-Shear Spec. 305.
HL40DL(-)(-) = KALGARD™ FA or EM620C solid film lube per AS5272, Type I, and cetyl alcohol lube per Hi-Shear Spec. 305.
HL40DU(-)(-) = Solid film lube AS5272, Type I.
[8]HL40GU(-)(-) = Silver plate per AMS2410.
[8]HL40K(-)(-) = Solid film lubricant per LUBECO™ 905.

"HI-LOK", "HL", AND "HI-KOTE", ARE TRADEMARKS OF HI-SHEAR CORPORATION

DRAWN BY C.E.K.		DATE 1962-10-17		TITLE HI-LOK™ PIN	
J.F.OBISPO		2015-12-08		PROTRUDING SHEAR HEAD	
APPROVED M.E.C.		DATE 1962-10-17		A-286 HIGH TEMPERATURE ALLOY	
				1/16 GRIP VARIATION	
REVISION [27]		DATE F.CARINGELLA 2017-03-29		DRAWING NUMBER HL40	

1 OF 1

HL40