



Huck BOM[®]

The Highest Strength Blind Fasteners in the World

Vibration Resistant
Easy to Install
Mechanically Locked

3/16" - 3/4"



The Highest Strength Blind Oversize Fasteners in the World

BOM® (Blind, Oversize Mechanically locked) fasteners from Howmet Fastening Systems are so strong, one can do the work of up to four conventional fasteners.


There is not a more vibration resistant blind fastener than the BOM, or one that works harder in so many different applications. Featuring a unique push-and-pull installation design, the BOM fastening system is tough enough for military vehicles and equipment, auto suspensions, amusement park rides, rail car assembly, and shaft steel storage and retrieval racks. Even the most demanding high-tensile application is no match for the strength of the BOM fastening system.

Because installing BOM fasteners is so easy, a worker can learn the installation procedure in just 10 minutes, eliminating the need to hire certified welders or specially trained employees. And because they install from just one side, BOMs can be used in all blind side applications.

Installations are more accurate than other fasteners, because the element of human error is not an issue. In other words, correct installation doesn't depend on operator skill or specialized tools. In addition, you can often start using BOM fasteners immediately with your current tools, saving you more money in the long run.

Data and Dimensions

Small Diameter Bullet Head Blind Rivet

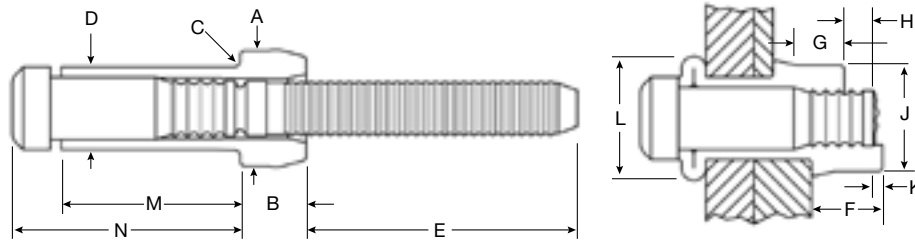

Dimensional Data

DIA.	DIA	HOLE SIZE	A	B	C Max	D	E Min
3/16"	(6)	.208-.222	0.276-0.286	0.152-0.168	0.015	0.196-0.206	0.785
1/4"	(8)	.277-.292	0.368-0.380	0.205-0.225	0.020	0.262-0.275	0.860
5/16"	(10)	.348-.368	0.468-0.478	0.266-0.278	0.025	0.332-0.346	1.285
3/8"	(12)	.413-.435	0.553-0.563	0.315-0.327	0.030	0.393-0.411	1.230
1/2"	(16)	.546-.581	0.740-0.755	0.415-0.438	0.035	0.529-0.544	1.530
5/8"	(20)	.687-.728	0.925-0.941	0.507-0.545	0.040	0.662-0.685	1.710
3/4"	(24)	.828-.873	1.110-1.130	0.637-0.654	0.050	0.795-0.816	2.150

Inspection Data

DIA.	FNom	G Min	H Max	J Max	K Max	LNom
3/16"	0.177	0.109	0.094	0.261	0.031	0.306
1/4"	0.232	0.156	0.094	0.346	0.031	0.405
5/16"	0.300	0.187	0.171	0.434	0.046	0.517
3/8"	0.360	0.203	0.171	0.510	0.046	0.605
1/2"	0.475	0.297	0.171	0.686	0.063	0.841
5/8"	0.595	0.406	0.313	0.874	0.078	1.038
3/4"	0.722	0.438	0.313	1.027	0.078	1.267

Installed Values in Nominal Grip (lbs.)

DIAMETER	SHEAR	TENSILE
3/16"	2800	1800
1/4"	5100	3250
5/16"	8050	5200
3/8"	11100	7250
1/2"	20150	13000
5/8"	28500	20500
3/4"	45100	29100

Note: These are minimum ultimate shear and tensile strengths, in pounds, of installed fastener, when tested in a grip equal to or greater than one and one half the fastener diameter.

Grip Data									
	GRIP NO.	GRIP RANGE	MNom	NMax		GRIP NO.	GRIP RANGE	MNom	NMax
6 (3/16")	2	.093-.156	.376	.500	12 (3/8")	4	.188-.312	.766	.975
	3	.157-.219	.439	.562		6	.313-.437	.891	1.100
	4	.220-.281	.501	.625		8	.438-.562	1.016	1.225
	5	.282-.344	.564	.687		10	.563-.687	1.141	1.350
	6	.345-.406	.626	.750		12	.688-.812	1.266	1.475
	7	.407-.469	.689	.812		14	.813-.937	1.391	1.600
	8	.470-.531	.751	.875		16	.938-1.062	1.516	1.725
	9	.532-.594	.814	.937		18	1.063-1.187	1.641	1.850
	10	.595-.656	.876	1.000		20	1.188-1.312	1.766	1.975
	11	.657-.719	.939	1.062		4	.251-.375	1.000	1.266
	12	.720-.781	1.001	1.125		6	.376-.500	1.125	1.391
	8 (1/4")	2	.093-.156	.460		.625	8	.501-.625	1.250
3		.157-.219	.523	.688	10	.626-.750	1.375	1.641	
4		.220-.281	.585	.750	12	.751-.875	1.500	1.766	
5		.282-.344	.648	.813	14	.876-1.000	1.625	1.891	
6		.345-.406	.710	.875	16	1.001-1.125	1.750	2.016	
7		.407-.469	.773	.938	18	1.126-1.250	1.875	2.141	
8		.470-.531	.835	1.000	20	1.251-1.375	2.000	2.266	
9		.532-.594	.898	1.063	22	1.376-1.500	2.125	2.391	
10		.595-.656	.960	1.125	24	1.501-1.625	2.250	2.516	
11		.657-.719	1.023	1.188	4	.251-.500	1.213	1.531	
12		.720-.781	1.085	1.250	8	.501-.750	1.463	1.781	
13		.782-.843	1.147	1.313	12	.751-1.000	1.713	2.031	
14		.844-.905	1.209	1.375	16	1.001-1.250	1.963	2.281	
10 (5/16")		4	.188-.312	.695	.875	20	1.251-1.500	2.213	2.531
	5	.250-.375	.758	.938	4	.251-.500	1.380	1.750	
	6	.313-.437	.820	1.000	8	.501-.750	1.630	2.000	
	8	.438-.562	.945	1.125	12	.751-1.000	1.880	2.250	
	10	.563-.687	1.070	1.250	16	1.001-1.250	2.130	2.500	
	12	.688-.812	1.195	1.375	20	1.251-1.500	2.380	2.750	
	14	.813-.937	1.320	1.500	24	1.501-1.750	2.630	3.000	
	16	.938-1.062	1.445	1.625	28	1.751-2.000	2.880	3.250	
12 (3/8")	4	.188-.312	.695	.875	32	2.001-2.250	3.130	3.500	
	5	.250-.375	.758	.938	36	2.251-2.500	3.380	3.750	
	6	.313-.437	.820	1.000	40	2.501-2.750	3.630	4.000	
	8	.438-.562	.945	1.125	44	2.751-3.000	3.880	4.250	
	10	.563-.687	1.070	1.250					
	12	.688-.812	1.195	1.375					
	14	.813-.937	1.320	1.500					
	16	.938-1.062	1.445	1.625					
	18	1.063-1.187	1.570	1.750					
	20	1.188-1.312	1.695	1.875					



BOM Installation Tooling

Installation Tools									
PNEUDRAULIC TOOLS				HYDRAULIC TOOLS					
TOOL MODEL	SIZE*	254	256	2480	2581	2600	2624	2624PTD	3585
NOSE ASSEMBLY	3/16"	99-1053	99-1053	99-994	99-1053				
	1/4"	99-830-1	99-830-1		99-830-1				
	5/16"		99-769		99-769**	99-3119			
	3/8"		99-1272*			99-3122			
	1/2"						99-5107	99-5106	99-5107
	5/8"						99-5102		99-5102
	3/4"								99-5103

* Use only in very low volume repair applications.

** Requires 123634-2580 steel deflector

Model
256

Model
3585

Model
2581

Tooling Weight and Dimensions					
MODEL	TYPE	WEIGHT	LENGTH	HEIGHT	WIDTH
254	PNEUDRAULIC	8.67	8.0	14.9	5.2
256	PNEUDRAULIC	11.1	7.9	14.9	6.3
2480	HYDRAULIC	2.2	8.2	6.6	1.9
2581	HYDRAULIC	6.6	8.5	7.3	2.2
2600	HYDRAULIC	7.3	9.5	7.9	2.7
2624	HYDRAULIC	17.4	7.4	7.7	3.5
2624PTD	HYDRAULIC	17.4	13.02	7.7	3.5
3585	HYDRAULIC	19	7.9	11.3	2



Ordering Information

Follow the form below to construct a part number for ordering Huck BOM blind fasteners. Refer to the Grip Data chart for grip numbers.

Ordering Information

BOM-R (DIAMETER) - (GRIP NUMBER)

Example: BOM-R8-6 is a BOM blind rivet, Steel, 1/4" Diameter, Grip 6.

MATERIAL	CODE
STEEL	R

DIAMETER	CODE
3/16"	6
1/4"	8
5/16"	10
3/8"	12
1/2"	16
5/8"	20
3/4"	24

Materials and Finishes

MATERIAL	SLEEVE	PIN	*SLEEVE FINISH	*PIN FINISH
STEEL	LOW CARBON STEEL	MEDIUM CARBON STEEL	ZINC PLATED CLEAR CHROMATE	BLACK OIL

* Optional coatings available



**HOWMET
AEROSPACE**

Industrial Division Brands

