


5008 Series - Internal Ring, With Inverted Lugs

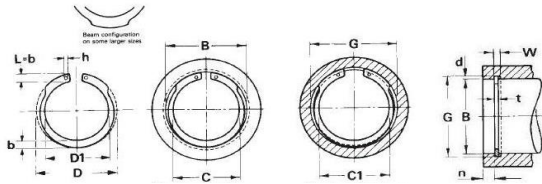

| Part Number | Application Diameter (B) [in.] | Groove Diameter (G) [in.] | Groove Width (W) [in.] | Groove Depth [in.] | Ring Diameter (D) [in.] | Ring Thickness [in.] | Ring Radial Wall (b) [in.] | Ring lbs./1000 pcs [lbs.] |
|-------------|--------------------------------|---------------------------|------------------------|--------------------|-------------------------|----------------------|----------------------------|---------------------------|
| 5008-600    | 1.300                          | 1.625                     | 0.750                  | 0.088              | 1.520                   | 0.039                | 0.808                      | 0.038                     |
| -           | 1.300                          | 5008-075                  | 0.750                  | 0.088              | 1.520                   | 0.039                | 0.808                      | 0.038                     |
| -           | 2.000                          | 5008-081                  | 0.812                  | 0.082              | 2.045                   | 0.045                | 0.877                      | 0.042                     |
| -           | 2.200                          | 5008-087                  | 0.875                  | 0.091              | 2.245                   | 0.046                | 0.914                      | 0.042                     |
| -           | 2.800                          | 5008-098                  | 0.938                  | 1.000              | 2.845                   | 0.046                | 1.015                      | 0.042                     |
| -           | 2.900                          | 5008-100                  | 1.000                  | 1.066              | 2.945                   | 0.046                | 1.031                      | 0.042                     |
| -           | 3.300                          | 5008-106                  | 1.062                  | 1.130              | 3.345                   | 0.056                | 1.150                      | 0.050                     |
| -           | 4.400                          | 5008-112                  | 1.125                  | 1.197              | 4.445                   | 0.056                | 1.217                      | 0.050                     |
| -           | 4.900                          | 5008-118                  | 1.188                  | 1.262              | 4.945                   | 0.056                | 1.282                      | 0.050                     |
| -           | 5.000                          | 5008-125                  | 1.250                  | 1.350              | 5.045                   | 0.056                | 1.351                      | 0.050                     |
| -           | 5.300                          | 5008-131                  | 1.312                  | 1.396              | 5.345                   | 0.056                | 1.418                      | 0.050                     |
| -           | 5.900                          | 5008-137                  | 1.375                  | 1.461              | 5.945                   | 0.056                | 1.486                      | 0.050                     |
| -           | 6.300                          | 5008-143                  | 1.438                  | 1.523              | 6.345                   | 0.056                | 1.552                      | 0.050                     |
| -           | 6.800                          | 5008-150                  | 1.500                  | 1.594              | 6.845                   | 0.056                | 1.622                      | 0.050                     |
| -           | 8.900                          | 5008-156                  | 1.562                  | 1.658              | 8.945                   | 0.068                | 1.688                      | 0.062                     |
| -           | 10.400                         | 5008-162                  | 1.625                  | 1.725              | 10.445                  | 0.068                | 1.756                      | 0.062                     |
| -           | 11.900                         | 5008-168                  | 1.688                  | 1.792              | 11.945                  | 0.068                | 1.823                      | 0.062                     |
| -           | 11.800                         | 5008-175                  | 1.750                  | 1.858              | 11.845                  | 0.068                | 1.891                      | 0.062                     |
| -           | 14.800                         | 5008-187                  | 1.875                  | 1.989              | 14.845                  | 0.068                | 2.025                      | 0.062                     |
| -           | 17.400                         | 5008-200                  | 2.000                  | 2.122              | 17.445                  | 0.068                | 2.160                      | 0.062                     |
| -           | 23.200                         | 5008-206                  | 2.062                  | 2.186              | 23.245                  | 0.086                | 2.224                      | 0.078                     |
| -           | 24.300                         | 5008-212                  | 2.125                  | 2.251              | 24.345                  | 0.086                | 2.295                      | 0.078                     |
| -           | 28.600                         | 5008-237                  | 2.375                  | 2.517              | 28.645                  | 0.086                | 2.567                      | 0.078                     |
| 5008-243    | 2.438                          | 2.584                     | 0.086                  | 0.072              | 2.634                   | 0.078                | -                          | 30.600                    |
| 5008-250    | 2.500                          | 2.648                     | 0.086                  | 0.074              | 2.700                   | 0.078                | -                          | 32.100                    |
| 5008-262    | 2.625                          | 2.781                     | 0.103                  | 0.078              | 2.840                   | 0.093                | -                          | 45.600                    |
| 5008-275    | 2.750                          | 2.914                     | 0.103                  | 0.082              | 2.975                   | 0.093                | -                          | 47.800                    |
| 5008-283    | 2.812                          | 2.980                     | 0.103                  | 0.084              | 3.063                   | 0.093                | -                          | 49.500                    |
| 5008-283    | 2.835                          | 3.006                     | 0.103                  | 0.086              | 3.063                   | 0.093                | -                          | 49.500                    |
| 5008-287    | 2.875                          | 3.051                     | 0.103                  | 0.088              | 3.105                   | 0.093                | -                          | 50.100                    |
| 5008-300    | 3.000                          | 3.182                     | 0.103                  | 0.091              | 3.245                   | 0.093                | -                          | 52.600                    |
| 5008-315    | 3.156                          | 3.348                     | 0.120                  | 0.096              | 3.408                   | 0.109                | -                          | 69.400                    |
| 5008-325    | 3.250                          | 3.446                     | 0.120                  | 0.098              | 3.509                   | 0.109                | -                          | 72.600                    |
| 5008-334    | 3.346                          | 3.546                     | 0.120                  | 0.100              | 3.611                   | 0.109                | -                          | 75.600                    |
| 5008-350    | 3.500                          | 3.710                     | 0.120                  | 0.105              | 3.780                   | 0.109                | -                          | 80.200                    |
| 5008-356    | 3.562                          | 3.776                     | 0.120                  | 0.107              | 3.850                   | 0.109                | -                          | 82.400                    |
| 5008-400    | 4.000                          | 4.240                     | 0.120                  | 0.120              | 4.350                   | 0.109                | -                          | 97.400                    |