



PRODUCT DESCRIPTION

Technology	
Cure Application	

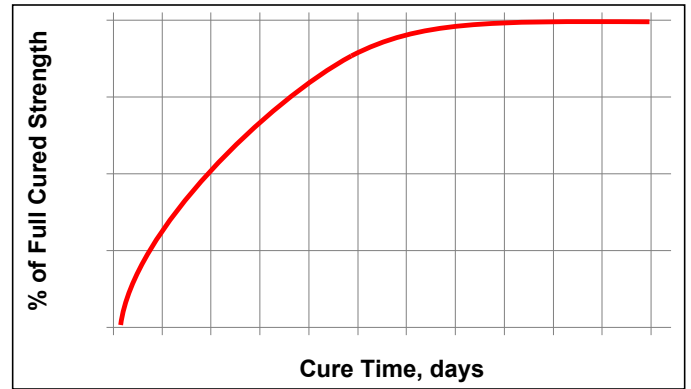

Depth of Cure

TYPICAL PROPERTIES OF UNCURED MATERIAL

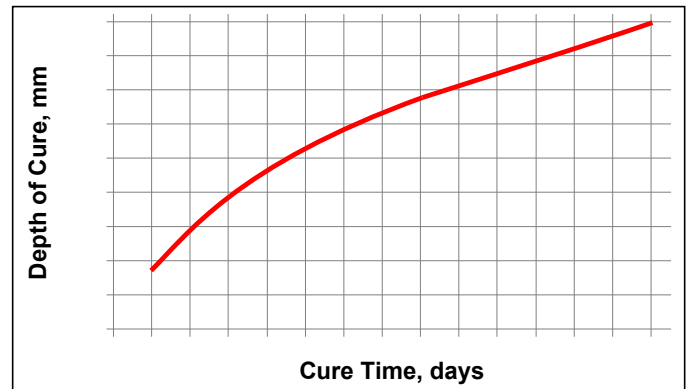

TYPICAL CURING PERFORMANCE


Surface Cure

Cure Speed

TYPICAL PROPERTIES OF CURED MATERIAL

Physical Properties

TYPICAL PERFORMANCE OF CURED MATERIAL
Adhesive Properties

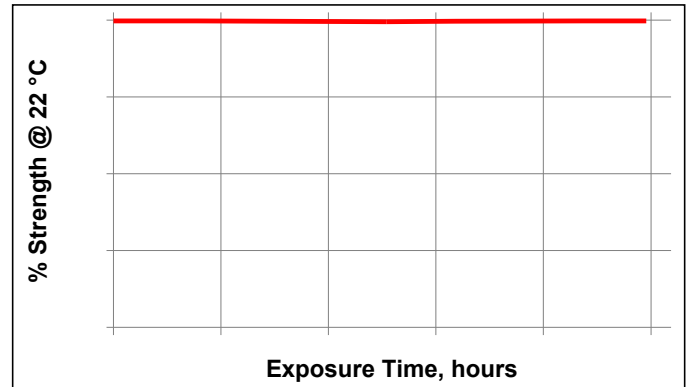


Environmental Aging - Effect on bulk properties

Environment	100 h	500 h	1000 h

TYPICAL ENVIRONMENTAL RESISTANCE

Hot Strength

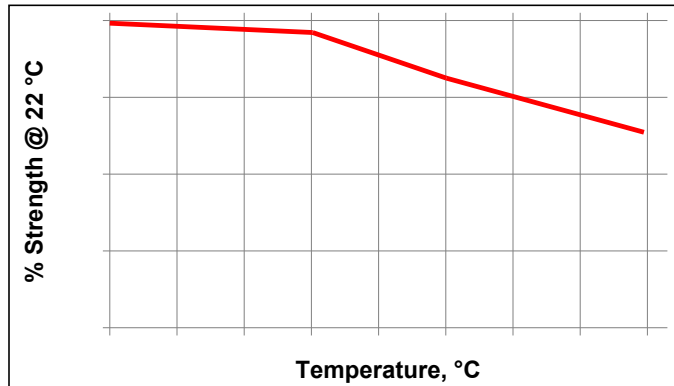

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS).

Directions for use:

Loctite Material Specification^{LMS}

Storage

Optimal Storage: 8 °C to 21 °C. Storage below 8 °C or greater than 28 °C can adversely affect product properties

Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.

Trademark usage

Conversions

Note:

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada Corporation, the following disclaimer is applicable: