




hi-shear corporation
2600 SKYPARK DRIVE, TORRANCE, CALIFORNIA 90509 U.S.A.

BLANC AEROSPACE INDUSTRIES UK Ltd
a LISI AEROSPACE Company
BLANC AERO INDUSTRIES SA, France
a LISI AEROSPACE Company
BLANC AEROSPACE TECHNOLOGIES SA, France
a LISI AEROSPACE Company
LISI AEROSPACE CANADA, Canada
a LISI AEROSPACE Company


Licensee CAGE No. U6300
Licensee CAGE No. F0188-C
Licensee CAGE No. FA1X3
Licensee CAGE No. L4528

SPS TECHNOLOGIES, USA
SPS TECHNOLOGIES, UK
MINEBEA, Japan
ANKIT FASTENERS Ltd, India

Licensee (USA, Canada) CAGE No. 06725
Licensee CAGE No. 56878
Licensee CAGE No. K5673
Licensee (Japan) CAGE No. SB962
Licensee CAGE No. SEM10
(Steel WW; Titanium - India) (29)

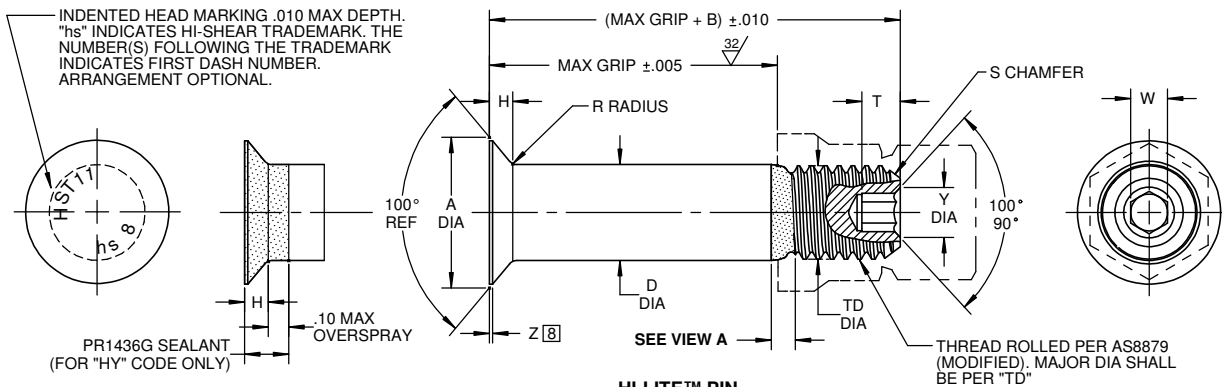


HI-LITE™ PIN

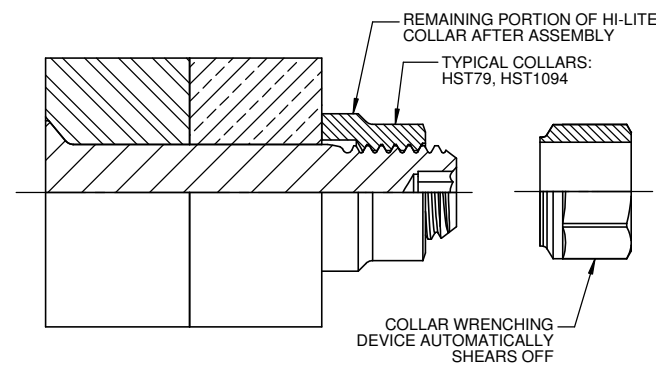

HI-LITE™ PIN AND COLLAR AFTER ASSEMBLY

FIRST DASH NO.	PIN NOM DIA	A DIA	B REF	D DIA		TD DIA	F	H	R RAD	Z MAX	S CHAMFER REF	THREAD MODIFIED	SOCKET			DOUBLE SHEAR POUNDS MINIMUM	TENSION POUNDS MINIMUM
				WITHOUT COATING OR SOLID FILM	AFTER COATING OR SOLID FILM								W HEX	T DEPTH	Y DIA		
5	5/32	.2612 .2564	.280	.1635 .1630	.1635 .1625	.1595 .1570	.004	.0410 .0390	.025 .015	.010	1/32 x 37°	.1640-32 UNJC-3A	.0645 .0635	.135 .115	.090 .075	4,010	1,650
6	3/16	.3016 .2966	.290	.1895 .1890	.1895 .1885	.1840 .1810	.005	.0470 .0450	.030 .020	.015	1/32 x 37°	.1900-32 UNJF-3A	.0806 .0791	.100 .080	.119 .104	5,380	2,000
8	1/4	.3948 .3898	.320	.2495 .2490	.2495 .2485	.2440 .2410	.006	.0610 .0590	.030 .020	.015	1/32 x 37°	.2500-28 UNJF-3A	.0967 .0947	.150 .142	.122	9,300	3,700
10	5/16	.4739 .4689	.380	.3120 .3115	.3120 .3110	.3060 .3020	.007	.0680 .0660	.040 .030	.015	3/64 x 37°	.3125-24 UNJF-3A	.1295 .1270	.170 .150	.180 .160	14,600	5,000
12	3/8	.5604 .5554	.420	.3745 .3740	.3745 .3735	.3680 .3640	.008	.0780 .0760	.040 .030	.015	3/64 x 37°	.3750-24 UNJF-3A	.1617 .1582	.200 .180	.217 .197	21,000	7,200
14	7/16	.6680 .6620	.485	.4370 .4365	.4370 .4360	.4310 .4260	.009	.0969 .0944	.050 .040	.022	3/64 x 37°	.4375-20 UNJF-3A	.1930 .1895	.230 .210	.253 .233	28,600	10,000
16	1/2	.7540 .7480	.525	.4995 .4990	.4995 .4985	.4930 .4880	.010	.1068 .1043	.050 .040	.022	3/64 x 37°	.5000-20 UNJF-3A	.2242 .2207	.260 .240	.289 .269	37,300	13,500
18	9/16	.8380 .8310	.600	.5615 .5610	.5615 .5605	.5550 .5500	.010	.1160 .1131	.050 .040	.022	1/16 x 37°	.5625-18 UNJF-3A	.2555 .2520	.290 .270	.326 .306	47,200	17,000
20	5/8	.9250 .9180	.660	.6240 .6235	.6240 .6230	.6180 .6120	.010	.1260 .1230	.050 .040	.022	1/16 x 37°	.6250-18 UNJF-3A	.2555 .2520	.330 .305	.326 .306	58,300	21,000
24	3/4	1.0970 1.0850	.895	.7490 .7485	.7490 .7480	.7430 .7370	.012	.1460 .1410	.050 .040	.022	1/16 x 37°	.7500-16 UNJF-3A	.3185 .3150	.395 .365	.398 .378	83,900	30,700
28	7/8	1.3197 1.3030	1.000	.8740 .8735	.8740 .8730	.8680 .8610	.014	.1870 .1800	.050 .040	.022	5/64 x 37°	.8750-14 UNJF-3A	.3820 .3780	.455 .425	.471 .451	107,000	42,000
32	1	1.5186 1.4995	1.160	.9990 .9985	.9990 .9980	.9930 .9860	.014	.2180 .2100	.050 .040	.022	5/64 x 37°	1.0000-12 UNJF-3A	.5100 .5040	.580 .550	.618 .598	140,000	55,000

SEE COLLAR STANDARDS FOR COLLAR STRENGTHS. LOWER STRENGTH (PIN OR COLLAR) DETERMINES SYSTEM STRENGTH.

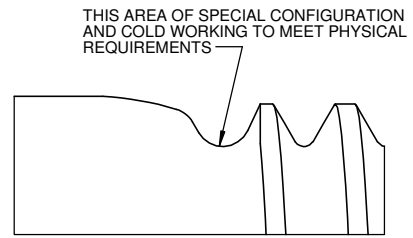

VIEW A
HI-LITE™ THREAD TRANSITION AREA
SEE SPECIFICATION FOR INSPECTION

"HI-LITE", "HST", and "HI-KOTE", are Trademarks of Hi-Shear Corporation.

DRAWN BY J. Obispo	DATE 8-4-85	TITLE HI-LITE™ PIN
APPROVED E. E. Beeles	DATE 8-4-85	100° FLUSH SHEAR HEAD TITANIUM 1/16 GRIP VARIATION
REVISION (29)	DATE F.C. 8-12-15	DRAWING NUMBER HST11

1 of 2

HST11

- GENERAL NOTES:**
- 1 Head edge out of roundness shall not exceed "F".
 2. Concentricity: Conical surface of head to "D" diameter within .003 FIM.
 3. "H" is dimensioned from maximum "D" diameter.
 4. Dimensions to be met after finish.
 5. Surface texture per ANSI B46.1.
 6. Hole preparation per NAS618.
 - 7 Maximum "D" diameter may be increased by .0002 to allow for solid film or aluminum coating application.
 - 8 Curved or flat edge manufacturer's option.
 - 9 Broach petals removed.
 10. Use HST111 for oversize replacement.
 - 11 After February, 21st of 2015, HI-KOTE™ 1 aluminum pigmented coating will be replaced by REACH compliant HI-KOTE™ 1 NC aluminum pigmented coating per Hi-Shear Spec. 294 on fasteners coated in European Union.
 - 12 After September 30th of 2015, HI-KOTE™ 4 coating per HS397 will be replaced by HI-KOTE™ 4 NC coating per HS397.

MATERIAL: 6AL-4V titanium alloy per AMS4928 or AMS4967.


HEAT TREAT: 160,000 psi tensile minimum (95,000 psi shear minimum for sizes up to 3/4; 90,000 psi shear minimum for 7/8 and larger).

- FINISH:**
- HST11(-)(-) = Cetyl alcohol lube per Hi-Shear Spec. 305.
 - 11 HST11AG(-)(-) = HI-KOTE™ 1 aluminum pigmented coating per Hi-Shear Spec. 294, with color orange on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - 11 HST11AP(-)(-) = HI-KOTE™ 1 aluminum pigmented coating per Hi-Shear Spec. 294, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - 11 HST11AZ(-)(-) = HI-KOTE™ 1 aluminum pigmented coating per Hi-Shear Spec. 294, with color black on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - HST11BJ(-)(-) = I.V.D. aluminum coating per MIL-DTL-83488, Type II, Class 3, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - HST11BL(-)(-) = I.V.D. aluminum coating per MIL-DTL-83488, Type II, Class 3, with color black on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - 9 HST11CT(-)(-) = Color orange on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - 12 HST11HK(-)(-) = HI-KOTE™ 4 NC aluminum coating per Hi-Shear Spec. 397.
 - 11 HST11HY(-)(-) = HI-KOTE™ 1 aluminum pigmented coating per Hi-Shear Spec. 294, with color orange on thread end, and apply Precoat No. PR1436G sealant (.002-.005 thick), and cetyl alcohol lube per Hi-Shear Spec. 305.
 - 9 HST11K(-)(-) = Solid film lube per "Lubeco™ 905". "LUBECO" is a trademark of Lubeco Incorporated.
 - 11 HST11KM(-)(-) = HI-KOTE™ 1 aluminum pigmented coating per Hi-Shear Spec. 294, with color white on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - 9 HST11MA(-)(-) = Solid film lube per "KalGard™ RA". "KALGARD" is a trademark of Metal Improvement Company.
 - HST11RP(-)(-) = Phosphate fluoride treat with color orange on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - HST11RS(-)(-) = Phosphate fluoride treat, solid film lube per AS5272, Type I, and color orange on thread end.
 - HST11SY(-)(-) = Phosphate fluoride treat, solid film lube per AS5272, Type I, and color red on thread end.
 - HST11TB(-)(-) = HI-KOTE™ 2 solid film lube per Hi-Shear Spec. 292, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - HST11TF(-)(-) = HI-KOTE™ 2 solid film lube per Hi-Shear Spec. 292.
 - HST11WF(-)(-) = Surface coating per Hi-Shear Spec. 306, Type I, color blue, with color black on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - HST11YV(-)(-) = HI-KOTE™ 2 solid film lube per Hi-Shear Spec. 292 on threads only, with color orange on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - HST11NKJ(-)(-) = HI-KOTE™ 1 NC aluminum pigmented coating per Hi-Shear Spec. 294, with color silver on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - HST11NKK(-)(-) = Sulfuric acid anodizing per ISO8080 and HI-KOTE™ 1 NC aluminum pigmented coating per Hi-Shear Spec. 294 on threads only, with color silver on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
 - HST11NKL(-)(-) = HI-KOTE™ 1 NC aluminum pigmented coating per Hi-Shear Spec. 294 on threads only, with color silver on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.

SPECIFICATION: HI-LITE™ Product Specification 380.

CODE: First dash number indicates nominal diameter in 1/32nds.
 Second dash number indicates maximum grip in 1/16ths.
 See Finish note for explanation of code letters.

HOW TO ORDER EXAMPLE:

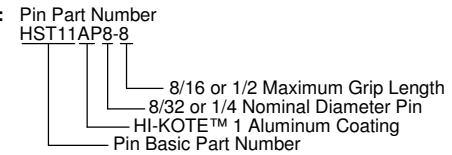

HST11